



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP 400mm Electric Fry Top, Smooth Brushed Chrome Plate

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



371321  
(E7I1K1AOMCA)

\* NOT TRANSLATED \*

371325  
(E7I1KDAOMCA)

\* NOT TRANSLATED \*

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- IPX 4 water protection.
- Frontal simmering zone.
- Temperature range from 120° up to 280°C.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for smooth plate included as standard.
- Infrared heating elements mounted below the cooking surface.
- Suitable for countertop installation.

### Construction

- Cooking surface to be completely smooth.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 12mm thick brushed chrome for optimum grilling results and ease of use.

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

**Included Accessories**

- 1 of Scraper for smooth plate fry tops PNC 164255

**Optional Accessories**

- |   |            |                          |
|---|------------|--------------------------|
| • Scraper for smooth plate fry tops   | PNC 164255 | <input type="checkbox"/> |
| • Junction sealing kit  | PNC 206086 | <input type="checkbox"/> |
| • Support for bridge type system, 800mm   | PNC 206137 | <input type="checkbox"/> |
| • Support for bridge type system, 1000mm  | PNC 206138 | <input type="checkbox"/> |
| • Support for bridge type system, 1200mm  | PNC 206139 | <input type="checkbox"/> |
| • Support for bridge type system, 1400mm  | PNC 206140 | <input type="checkbox"/> |
| • Support for bridge type system, 1600mm  | PNC 206141 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 800mm (only for 371321)                      | PNC 206148 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1000mm (only for 371325)                     | PNC 206150 | <input type="checkbox"/> |
| • Support for bridge type system, 400mm   | PNC 206154 | <input type="checkbox"/> |
| • Chimney upstand, 400mm  | PNC 206303 | <input type="checkbox"/> |
| • Right and left side handrails   | PNC 206307 | <input type="checkbox"/> |
| • BACK HANDRAIL 800 MM - MARINE   | PNC 206308 | <input type="checkbox"/> |
| • Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module) | PNC 206346 | <input type="checkbox"/> |
| • Chimney grid net, 400mm   | PNC 206400 | <input type="checkbox"/> |
| • Frontal handrail 400mm  | PNC 216046 | <input type="checkbox"/> |
| • Frontal handrail 800mm  | PNC 216047 | <input type="checkbox"/> |
| • Frontal handrail 1200mm   | PNC 216049 | <input type="checkbox"/> |
| • Frontal handrail 1600mm   | PNC 216050 | <input type="checkbox"/> |
| • Large handrail - portioning shelf, 400mm  | PNC 216185 | <input type="checkbox"/> |
| • Large handrail - portioning shelf, 800mm  | PNC 216186 | <input type="checkbox"/> |
| • 2 side covering panels for top appliances   | PNC 216277 | <input type="checkbox"/> |

**Recommended Detergents**


- \*NOT TRANSLATED\* PNC 0S2292 ☐

## Modular Cooking Range Line 700XP 400mm Electric Fry Top, Smooth Brushed Chrome Plate

Front




Side

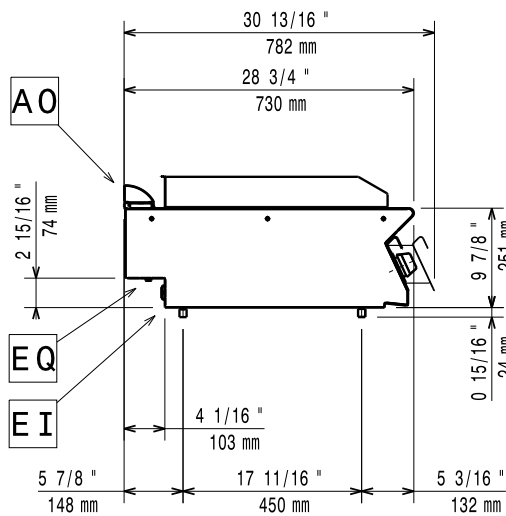

EI = Electrical inlet (power)  
EQ = Equipotential screw

Top

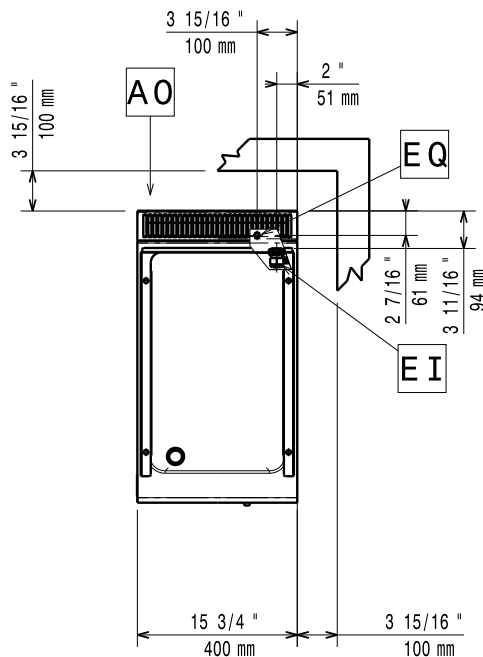

### Electric

#### Supply voltage:

371321 (E7I1K1AOMCA)	230 V/3 ph/50/60 Hz
371325 (E7I1K1DAOMCA)	400 V/3 ph/50-60 Hz

#### Electrical power max.:

371321 (E7I1K1AOMCA)	3.9 kW
371325 (E7I1K1DAOMCA)	4.2 kW

#### Total Watts:

371321 (E7I1K1AOMCA)	3.9 kW
371325 (E7I1K1DAOMCA)	4.2 kW

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Working Temperature MIN:	120 °C
Working Temperature MAX:	280 °C
External dimensions, Width:	400 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	250 mm
Net weight:	40 kg
Shipping weight:	41 kg
Shipping height:	
371321 (E7I1K1AOMCA)	540 mm
371325 (E7I1K1DAOMCA)	530 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.2 m <sup>3</sup>
Cooking surface width:	330 mm
Cooking surface depth:	540 mm