



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP 6 Drawer Refrigerated Base

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371296 (E7TTBECOMKN)

* NOT TRANSLATED *

Main Features

- Unit can be easily installed below other 700 line top models.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

Construction

- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

Sustainability



- CFC and HCFC free (highly ecological refrigerant type: R290).

Optional Accessories


- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 1600mm PNC 206152 ☐
- Frontal kicking strip, 1600mm (not for refr-freezer base) PNC 206179 ☐
- 4 feet for concrete installation PNC 206210 ☐
- 2 panels for service duct for single "top on base" installation PNC 206248 ☐
- Pair of side kicking strips PNC 206249 ☐
- Pair of side kicking strips for concrete installation PNC 206265 ☐
- 2 DRAWERS FOR REFRIGERATED BASE 700 LINE PNC 206351 ☐
- KIT 6 WHEELS - 3SWIVELLING WITH BRAKE-UK PNC 206432 ☐
- - NOT TRANSLATED - PNC 206444 ☐
- 2 side covering panels, h=700mm, d=700mm PNC 216000 ☐

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com

Front

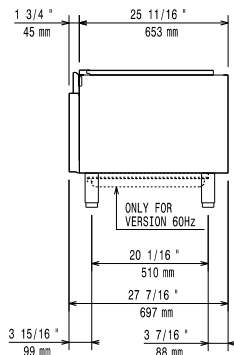


Side

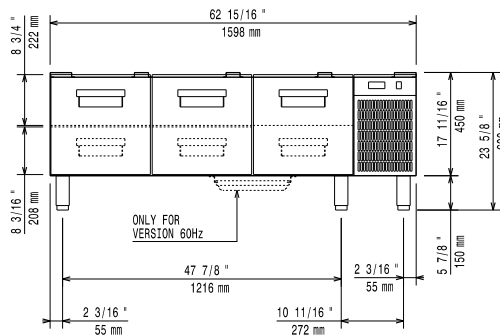

EI = Electrical inlet (power)

Top

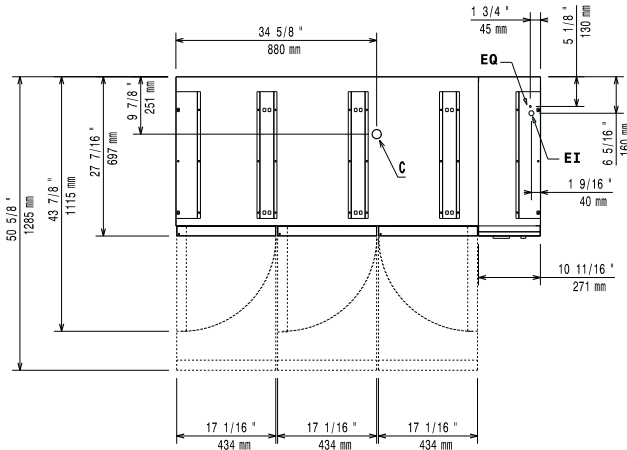

Electric

| | |
|------------------------|-----------------------|
| Supply voltage: | 220-230 V/1N ph/50 Hz |
| Electrical power max.: | 0.4 kW |
| Total Watts: | 0.4 kW |

Key Information:

| | |
|------------------------------|---------------------|
| External dimensions, Width: | 1600 mm |
| External dimensions, Depth: | 700 mm |
| External dimensions, Height: | 600 mm |
| Net weight: | 110 kg |
| Shipping weight: | 149 kg |
| Shipping height: | 780 mm |
| Shipping width: | 860 mm |
| Shipping depth: | 1700 mm |
| Shipping volume: | 1.14 m ³ |
| Gross capacity: | 180 lt |

Sustainability

| | |
|---------------------|------|
| Refrigerant type: | R290 |
| Refrigerant weight: | 85 g |