



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP 800mm Electric Fry Top, Smooth Brushed Chrome Plate

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



371322  
(E7I1K1A0MEA)

\* NOT TRANSLATED \*

371340  
(E7I1KDA0MEA)

\* NOT TRANSLATED \*

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1,5 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- IPx4 water protection.
- Infrared heating elements mounted below the cooking surface.
- Frontal simmering zone.
- Temperature range from 120° up to 280°C.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for smooth plate included as standard.
- Suitable for countertop installation.

### Construction

- Cooking surface completely smooth.
- Exterior panel in Stainless Steel with Scotch Brite finish.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 12mm thick brushed chrome for optimum grilling results and ease of use.

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

**Included Accessories**

- 1 of Scraper for smooth plate fry tops PNC 164255

**Optional Accessories**


- Scraper for smooth plate fry tops PNC 164255 ☐
- Junction sealing kit PNC 206086 ☐
- Support for bridge type system, 800mm PNC 206137 ☐
- Support for bridge type system, 1000mm PNC 206138 ☐
- Support for bridge type system, 1200mm PNC 206139 ☐
- Support for bridge type system, 1400mm PNC 206140 ☐
- Support for bridge type system, 1600mm PNC 206141 ☐
- Frontal kicking strip, 400mm (not for refr-freezer base) (only for 371322) PNC 206175 ☐
- Frontal kicking strip, 1000mm (not for refr-freezer base) (only for 371340) PNC 206177 ☐
- Chimney upstand, 800mm PNC 206304 ☐
- Right and left side handrails PNC 206307 ☐
- BACK HANDRAIL 800 MM - MARINE PNC 206308 ☐
- Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module) PNC 206346 ☐
- Chimney grid net, 400mm PNC 206400 ☐
- - NOT TRANSLATED - PNC 206455 ☐
- Frontal handrail 800mm PNC 216047 ☐
- Frontal handrail 1200mm PNC 216049 ☐
- Frontal handrail 1600mm PNC 216050 ☐
- Large handrail - portioning shelf, 800mm PNC 216186 ☐
- 2 side covering panels for top appliances PNC 216277 ☐

**Recommended Detergents**


- \*NOT TRANSLATED\* PNC 0S2292 ☐

## Modular Cooking Range Line 700XP 800mm Electric Fry Top, Smooth Brushed Chrome Plate


Front

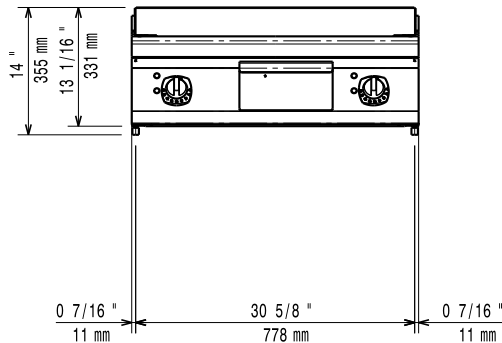

Side

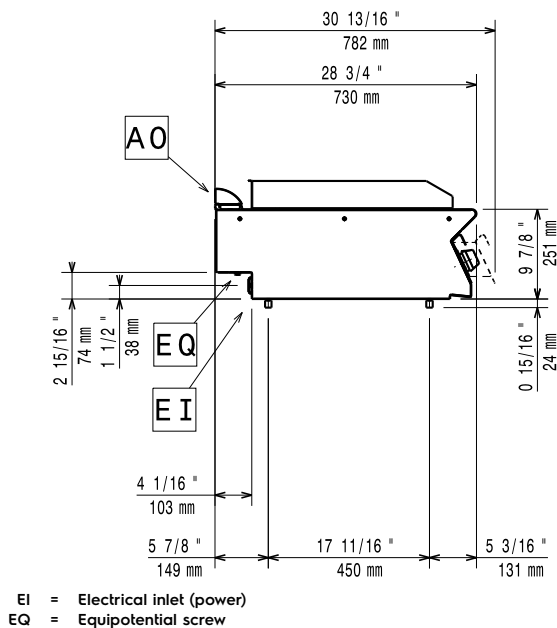

Top

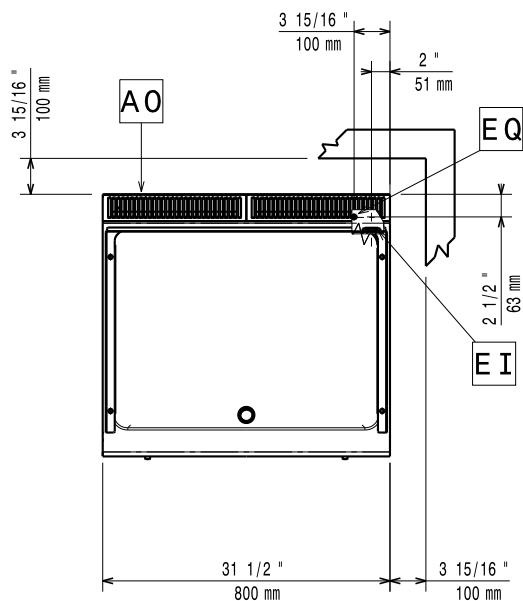

### Electric

#### Supply voltage:

|                      |                     |
|----------------------|---------------------|
| 371322 (E7IIKIAOMEA) | 230 V/3 ph/50/60 Hz |
| 371340 (E7IIKDAOMEA) | 400 V/3 ph/50-60 Hz |

#### Predisposed for:

#### Electrical power max.:

|                      |        |
|----------------------|--------|
| 371322 (E7IIKIAOMEA) | 7.8 kW |
| 371340 (E7IIKDAOMEA) | 8.4 kW |

#### Total Watts:

|                      |        |
|----------------------|--------|
| 371322 (E7IIKIAOMEA) | 7.8 kW |
| 371340 (E7IIKDAOMEA) | 8.4 kW |

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

|                              |                     |
|------------------------------|---------------------|
| Working Temperature MIN:     | 120 °C              |
| Working Temperature MAX:     | 280 °C              |
| External dimensions, Width:  | 800 mm              |
| External dimensions, Depth:  | 730 mm              |
| External dimensions, Height: | 250 mm              |
| Net weight:                  | 70 kg               |
| Shipping weight:             |                     |
| 371322 (E7IIKIAOMEA)         | 75 kg               |
| 371340 (E7IIKDAOMEA)         | 73 kg               |
| Shipping height:             |                     |
| 371322 (E7IIKIAOMEA)         | 540 mm              |
| 371340 (E7IIKDAOMEA)         | 520 mm              |
| Shipping width:              | 820 mm              |
| Shipping depth:              | 860 mm              |
| Shipping volume:             |                     |
| 371322 (E7IIKIAOMEA)         | 0.38 m <sup>3</sup> |
| 371340 (E7IIKDAOMEA)         | 0.37 m <sup>3</sup> |
| Cooking surface width:       | 730 mm              |
| Cooking surface depth:       | 540 mm              |