



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Freestanding Gas Boiling Pan 60lt indirect heat

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371269 (E7BSGHINF0)

* NOT TRANSLATED *

Main Features

- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- Pressed cooking vessel and lid in 316 AISI Stainless steel.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Appliance is IPX4 water resistance certified.
- Solenoid valve to refill with hot and cold water.
- Safety valve avoids overpressure of the steam in the jacket.
- No overshooting of cooking temperatures, fast reaction.
- Large capacity drain tap enables precise portioning of the discharged food, especially small quantities.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Ergonomic: unique ratio vessel diameter and height; depth facilitates stirring and gentle food handling.
- Discharge tube and tap are very easy to clean from outside.
- Smooth large surfaces, easy access for cleaning.
- Pressure switch control monitors energy and water consumption.
- Exterior panels in Stainless Steel with Scotch Brite finish.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- One piece pressed 1.5 mm work top in Stainless steel.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- IPx4 water protection.
- The tanks are welded in two parts, the side band is in AISI 304, bottom is in ASI 316L, lids are in AISI 304.

Sustainability



- Closed heating system – no waste of energy.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Pressure switch control monitors energy and water consumption.

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

Optional Accessories


• Junction sealing kit	PNC 206086	☐	• 1-section noodle basket for 60lt boiling pans	PNC 921626	☐
• Draught diverter with 150mm diameter	PNC 206132	☐	• Trolley with lifting & removable tank	PNC 922403	☐
• Matching ring for flue condenser	PNC 206133	☐	• - NOT TRANSLATED -	PNC 927000	☐
• 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels.	PNC 206135	☐	• Pressure regulator for gas units	PNC 927225	☐
• Flanged feet kit	PNC 206136	☐			
• Frontal kicking strip for concrete installation, 400mm	PNC 206147	☐			
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	☐			
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐			
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐			
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐			
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐			
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐			
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐			
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐			
• 4 feet for concrete installation	PNC 206210	☐			
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐			
• Pair of side kicking strips	PNC 206249	☐			
• Pair of side kicking strips for concrete installation	PNC 206265	☐			
• Chimney upstand, 800mm	PNC 206304	☐			
• Right and left side handrails	PNC 206307	☐			
• BACK HANDRAIL 800 MM - MARINE	PNC 206308	☐			
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	☐			
• Base support for feet or wheels - 400mm (700/900XP)	PNC 206366	☐			
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐			
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐			
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐			
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐			
• Rear paneling - 800mm (700/900)	PNC 206374	☐			
• Rear paneling - 1000mm (700/900)	PNC 206375	☐			
• Rear paneling - 1200mm (700/900)	PNC 206376	☐			
• - NOT TRANSLATED -	PNC 206463	☐			
• 2 side covering panels, h=700mm, d=700mm	PNC 216000	☐			
• Frontal handrail 800mm	PNC 216047	☐			
• Frontal handrail 1200mm	PNC 216049	☐			
• Large handrail - portioning shelf, 800mm	PNC 216186	☐			




Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Freestanding Gas Boiling Pan 60lt indirect heat

Front

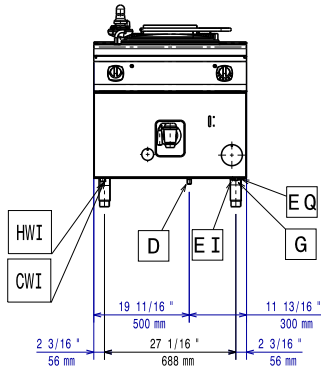


Side

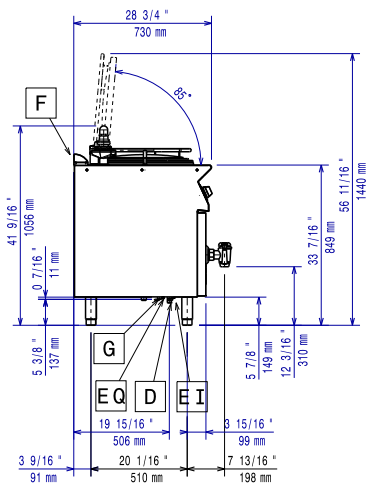

CWI = Cold Water inlet 1 (cleaning) HWI = Hot water inlet
D = Drain
EI = Electrical inlet (power)
G = Gas connection

Top

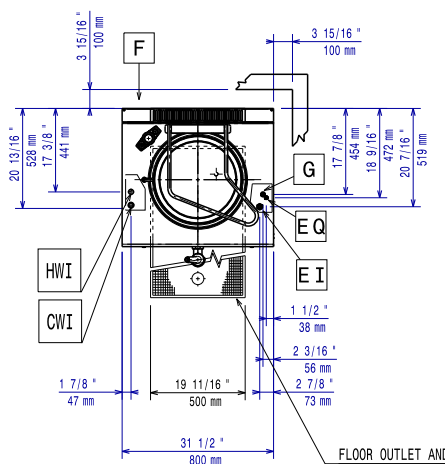

Electric

Supply voltage: 230 V/1N ph/50 Hz
Total Watts: 0.1 kW

Gas

Gas Power: 14 kW
Standard gas delivery: Natural Gas G20 (20mbar)
Gas Type Option: LPG
Gas Inlet: 1/2"

Water:

Water drain outlet size: 1 1/2"

Key Information:

No clearance needed on rear sides of unit if wall is of non combustible type. If wall is combustible, minimum 50 mm wall clearance should be maintained.

Pan useful capacity: 60 lt
Vessel (round) diameter: 420 mm
Net weight: 100 kg
Shipping weight: 100 kg
Shipping height: 1140 mm
Shipping width: 820 mm
Shipping depth: 860 mm
Shipping volume: 0.8 m³
Certification group: N7PG



Modular Cooking Range Line
700XP Freestanding Gas Boiling Pan 60lt indirect heat

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.08.17