



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP Full Module Electric Bain Marie Top

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



371097 (E7BMEHB000)

Electric bain-marie top with  
1GN2/1 well

371145 (E7BMEHB00N)

\* NOT TRANSLATED \*

### Short Form Specification

Item No. \_\_\_\_\_

To be installed on open base installations, bridging supports or cantilever systems. Maintains cooked food at serving temperature by using hot water inside the well. Water temperature controlled by thermostat with maximum temperature of 90 °C. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Bain Marie used for keeping cooked food at serving temperatures using hot water.
- Incoloy armoured heating elements positioned beneath the base of the well.
- Water basin is seamlessly welded into the top of the appliance.
- Filling water level is plate-marked on the side of the well.
- Unit to feature manual refill of well.
- Water temperature controlled by thermostat with maximum temperature value of 90 °C.
- Basin drained by tap on the front of the machine.
- All major compartments located in front of unit for ease of maintenance.
- Suitable for countertop installation.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


### Optional Accessories

• Junction sealing kit	PNC 206086	<input type="checkbox"/>
• Support for bridge type system, 800mm	PNC 206137	<input type="checkbox"/>
• Support for bridge type system, 1000mm	PNC 206138	<input type="checkbox"/>
• Support for bridge type system, 1200mm	PNC 206139	<input type="checkbox"/>
• Support for bridge type system, 1400mm	PNC 206140	<input type="checkbox"/>
• Support for bridge type system, 1600mm	PNC 206141	<input type="checkbox"/>
• Chimney upstand, 800mm	PNC 206304	<input type="checkbox"/>
• Right and left side handrails	PNC 206307	<input type="checkbox"/>
• BACK HANDRAIL 800 MM - MARINE	PNC 206308	<input type="checkbox"/>
• Stainless steel grid for free standing grills (only for 371097)	PNC 206410	<input type="checkbox"/>
• Frontal handrail 800mm	PNC 216047	<input type="checkbox"/>
• Frontal handrail 1200mm	PNC 216049	<input type="checkbox"/>
• Frontal handrail 1600mm	PNC 216050	<input type="checkbox"/>
• Large handrail - portioning shelf, 800mm	PNC 216186	<input type="checkbox"/>
• 2 side covering panels for top appliances	PNC 216277	<input type="checkbox"/>
• Drilled false bottom full module for bain-marie	PNC 921623	<input type="checkbox"/>
• Water filling tap for bain-marie top	PNC 921627	<input type="checkbox"/>


Front

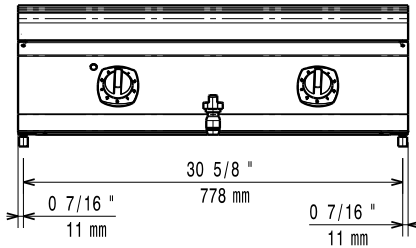

Side

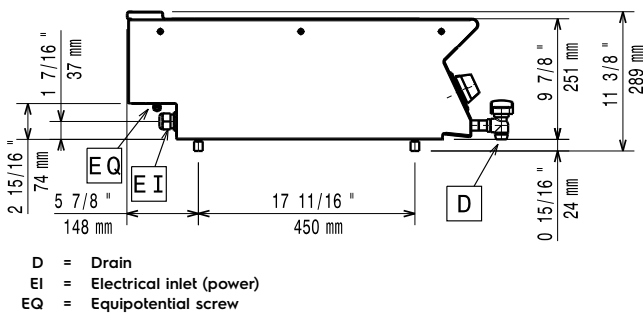

Top

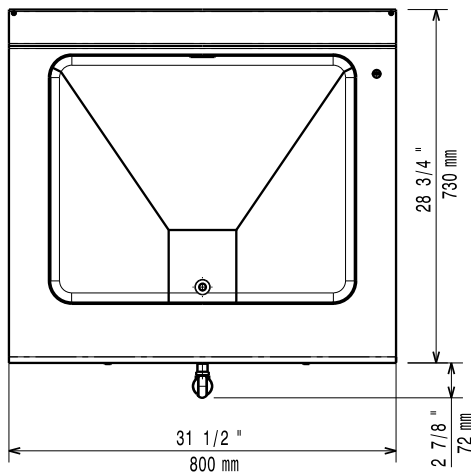

### Electric

#### Supply voltage:

371097 (E7BMEHB000)

380-400 V/2N ph/50-60 Hz

371145 (E7BMEHB00N)

230 V/3 ph/50/60 Hz

#### Total Watts:

3 kW

### Water:

#### Water Drain:

371097 (E7BMEHB000)

50 mm

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

#### Usable well dimensions (width):

630 mm

#### Usable well dimensions (height):

156 mm

#### Usable well dimensions (depth):

510 mm

#### Thermostat Range:

30 °C MIN; 90 °C MAX

#### Net weight:

27 kg

#### Shipping weight:

35 kg

#### Shipping height:

371097 (E7BMEHB000)

520 mm

371145 (E7BMEHB00N)

540 mm

#### Shipping width:

820 mm

#### Shipping depth:

860 mm

#### Shipping volume:

371097 (E7BMEHB000)

0.37 m<sup>3</sup>

371145 (E7BMEHB00N)

0.38 m<sup>3</sup>

#### Certification group:

371097 (E7BMEHB000)

EBM78

371145 (E7BMEHB00N)

N7BE1