

ecostore  
**2 Half Door Digital Freezer, 670lt**  
**(-22/ -15) with UK plug - 60Hz**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



725304 (RX72HF60)

\* NOT TRANSLATED \*

### Main Features

- Right hinged two 1/2 doors.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optimized back to front forced airflow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m\*K).
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Right hinged full door.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Easy serviceability thanks to the intuitive control panel with remote access via app.
- Large digital white-digit display with cabinet temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).

### Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for maintenance.
- Lockable door.
- Doors are self-closing and can be fully opened up to 180°.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- Delivered with UK plug.
- Mounted on wheels.

### Sustainability



- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.

APPROVAL: \_\_\_\_\_

**Included Accessories**

- 3 of 2/1GN grey rilsan grid with 2 runners PNC 881020

**Optional Accessories**


- 2 stainless steel runners for refrigerated cabinets - (Marine) PNC 880242 ☐
- Spacer for 670 lt and 1430 lt refrigerated cabinets PNC 880248 ☐
- Pedal opening for cabinets PNC 880324 ☐
- - NOT TRANSLATED - PNC 880570 ☐
- - NOT TRANSLATED - PNC 880685 ☐
- 1/1GN plastic container with false bottom PNC 880705 ☐
- 4 swivelling wheels (2 with brake) for refrigerators, diam 125 mm, NOT for Glass Door and remote models PNC 881002 ☐
- 2/1GN grey rilsan grid PNC 881004 ☐
- 2/1GN aisi 304 stainless steel grid PNC 881016 ☐
- 2/1GN 304 AISI stainless steel grid with 2 runners PNC 881018 ☐
- 2/1GN grey rilsan grid with 2 runners PNC 881020 ☐
- Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers PNC 881021 ☐
- 2/1GN perforated shelf PNC 881042 ☐
- 1/1GN rilsan steel wire basket h=150mm PNC 881043 ☐
- - NOT TRANSLATED - PNC 881298 ☐
- - NOT TRANSLATED - PNC 922432 ☐




**Electrolux**  
PROFESSIONAL

**ecostore**  
**2 Half Door Digital Freezer, 670lt**  
**(-22/ -15) with UK plug - 60Hz**

Front

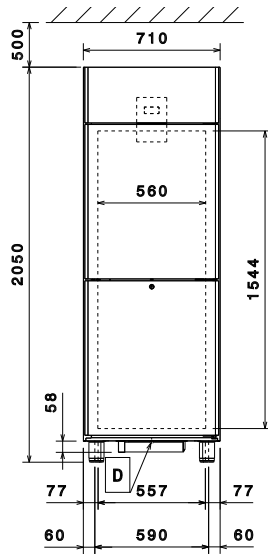


Side

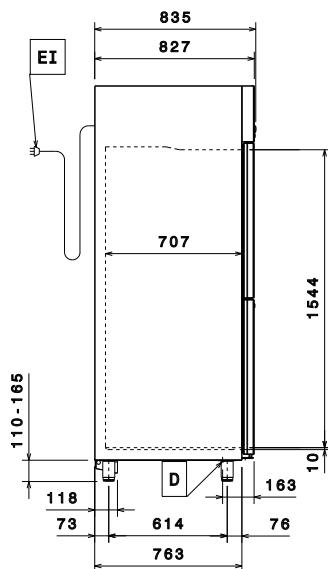

EI = Electrical inlet (power)

Top

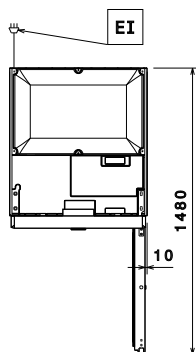

**Electric**

Supply voltage: 220-230 V/1 ph/60 Hz  
Electrical power max.: 0.58 kW

**Capacity:**

Number and type of grids (included): 3 - GN 2/1

**Key Information:**

**Door hinges:**

External dimensions, Width: 710 mm  
External dimensions, Depth: 835 mm  
External dimensions, Depth with Doors Open: 1480 mm  
External dimensions, Height: 2050 mm  
Number and type of doors: 2x1/2 Full  
Type of external material: 304 AISI  
Type of internal material: 304 AISI  
Internal panels material: 304 AISI  
Number of positions & pitch: 44; 30 mm  
Gross capacity: 670 lt

**Refrigeration Data**

Control type: Digital  
Refrigeration power at evaporation temperature: -30 °C  
Operating temperature min.: -22 °C  
Operating temperature max.: -15 °C  
Operating mode: Ventilated

**ISO Certificates**

ISO Standards: ISO 9001; ISO 14001; ISO 45001; ISO 50001

**Sustainability**

Refrigerant type: R290  
Refrigeration power: 530 W



**ecostore**  
**2 Half Door Digital Freezer, 670lt (-22/ -15) with UK plug - 60Hz**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.04.20