

ecostore
1 Door Digital Stainless Steel Freezer,
670lt (-22/-15) with UK plug-60Hz

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



725312 (R471FF60)

* NOT TRANSLATED *

Main Features

- Right hinged full door.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optimized back to front forced airflow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Freezer model has operating temperatures that can be adjusted from -22 to -15 °C.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Easy serviceability thanks to the intuitive control panel with remote access via app.
- Large digital white-digit display with cabinet temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).

Construction

- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Lockable door.
- Doors are self-closing and can be fully opened up to 180°.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- Easy access to the main components for maintenance.
- Delivered with UK plug.
- Mounted on wheels.
- AISI 430 stainless steel internal structure and external panels.

Sustainability



- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning
- Automatic evaporation of the defrosting water by

APPROVAL: _____



Electrolux
PROFESSIONAL

ecostore
1 Door Digital Stainless Steel Freezer,
670lt (-22/-15) with UK plug-60Hz

hot gas on the top for energy saving.



ecostore
1 Door Digital Stainless Steel Freezer, 670lt (-22/-15) with UK plug-60Hz

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.04.20



Included Accessories

- 3 of 2/1GN grey rilsan grid with 2 runners PNC 881020

Optional Accessories


- 2 stainless steel runners for refrigerated cabinets - (Marine) PNC 880242 ☐
- Spacer for 670 lt and 1430 lt refrigerated cabinets PNC 880248 ☐
- Pedal opening for cabinets PNC 880324 ☐
- - NOT TRANSLATED - PNC 880570 ☐
- - NOT TRANSLATED - PNC 880685 ☐
- 1/1GN plastic container with false bottom PNC 880705 ☐
- 4 swivelling wheels (2 with brake) for refrigerators, diam 125 mm, NOT for Glass Door and remote models PNC 881002 ☐
- Kit of 10 pairs of runners and 4 tray supports to fit pastry trays (400x600mm) PNC 881003 ☐
- 2/1GN grey rilsan grid PNC 881004 ☐
- 2/1GN aisi 304 stainless steel grid PNC 881016 ☐
- 2/1GN 304 AISI stainless steel grid with 2 runners PNC 881018 ☐
- 2/1GN grey rilsan grid with 2 runners PNC 881020 ☐
- Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers PNC 881021 ☐
- 2/1GN perforated shelf PNC 881042 ☐
- 1/1GN rilsan steel wire basket h=150mm PNC 881043 ☐
- - NOT TRANSLATED - PNC 881298 ☐
- - NOT TRANSLATED - PNC 922432 ☐




Electrolux
PROFESSIONAL

ecostore 1 Door Digital Stainless Steel Freezer, 670lt (-22/-15) with UK plug-60Hz

Front

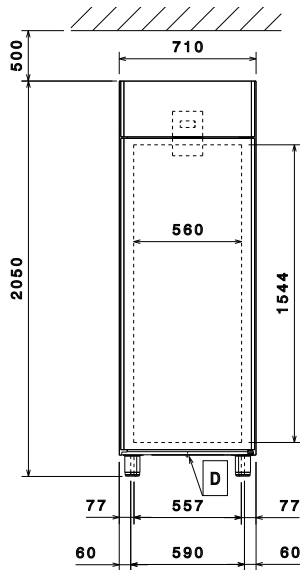


Side

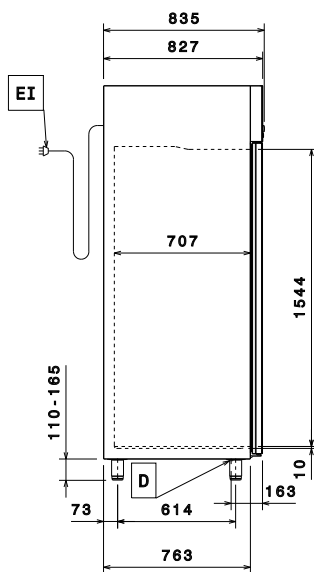

EI = Electrical inlet (power)

Top



Electric

Supply voltage: 220-230 V/1 ph/60 Hz
Electrical power max.: 0.58 kW

Capacity:

Number and type of grids (included): 3 - GN 2/1

Key Information:

Door hinges:

External dimensions, Width: 710 mm
External dimensions, Depth: 835 mm
External dimensions, Depth with Doors Open: 1480 mm
External dimensions, Height: 2050 mm
Number and type of doors: 1 Full
Type of external material: Stainless Steel
Type of internal material: Stainless Steel
Internal panels material: Stainless Steel
Number of positions & pitch: 44; 30 mm
Gross capacity: 670 lt

Refrigeration Data

Control type: Digital
Refrigeration power at evaporation temperature: -30 °C
Operating temperature min.: -15 °C
Operating temperature max.: -22 °C
Operating mode: Ventilated

ISO Certificates

ISO Standards: ISO 9001; ISO 14001; ISO 45001; ISO 50001

Sustainability

Refrigerant type: R290
Refrigeration power: 530 W
Refrigerant weight: 100 g