

Modular Cooking Range Line 900XP One Well Gas Fryer 15 liter

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



391077 (E9FRGD1GF0)

15-It gas fryer with 1 "V" shaped well (external burners) and 1 basket

Short Form Specification

Item No.

High efficiency 14 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

Main Features

- Deep drawn V-Shaped well.
- High efficiency 14 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 190 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 1 basket and 1 right side door for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- IPX5 water resistance certification.

Included Accessories

•	1 of Door for open base	PNC 206350
	cupboard	
•	1 of Full size basket for 14 and	PNC 921691

15lt free standing fryers

Optional Accessories

 Junction sealing kit 	PNC 206086 🗖
 Draught diverter 	PNC 206126 🗖
 Matching ring for flue condenser 	PNC 206127 🗅
 Flanged feet kit 	PNC 206136 🗖
 Frontal kicking strip for concrete installation, 400mm 	PNC 206147 □
 Frontal kicking strip for concrete installation, 800mm 	PNC 206148 □

APPROVAL:






Modular Cooking Range Line 900XP One Well Gas Fryer 15 liter

Frontal kicking strip for concrete installation, 1000mm	PNC 206150	 Full size basket for 14 and 15lt free standing fryers 	PNC 921691	[
Frontal kicking strip for concrete installation, 1200mm	PNC 206151	 2 half size baskets for 14 and 15lt fryers 	PNC 921692	[
Frontal kicking strip for concrete installation, 1600mm	PNC 206152	• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	[
• 2 SIDE KICKING STRIPS- CONCRETE INST-900	PNC 206157	Unclogging rod for 15lt drainage pipe	PNC 921695	[
 Frontal kicking strip, 400mm (not for refr-freezer base) 	PNC 206175	 Deflector for floured products for 15lt fryers 	PNC 921696	[
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	Pressure regulator for gas units	PNC 927225	[
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177			
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178			
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179			
 Pair of side kicking strips (not for refr-freezer base) 	PNC 206180			
 2 panels for service duct for single installation 	PNC 206181			
• 2 panels for service duct for back to back installation	PNC 206202			
 4 feet for concrete installation 	PNC 206210			
 Sediment tray for 15lt fryers 	PNC 206235			
 Oil drain pipe for 15lt free standing fryer 	PNC 206301			
Chimney upstand, 400mm	PNC 206303			
BACK HANDRAIL 800 MM - MARINE	PNC 206308			
 BACK HANDRAIL 1200 MM - MARINE 	PNC 206309			
 Flue condenser for 1/2 module, 120 mm diameter 	PNC 206310			
 Door for open base cupboard 	PNC 206350			
 Base support for feet or wheels - 400mm (700/900XP) 	PNC 206366			
 Base support for feet or wheels - 800mm (700/900) 	PNC 206367			
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368			
 Base support for feet or wheels - 1600mm (700/900) 				
 Base support for feet or wheels - 2000mm (700/900) 	PNC 206370			
 Rear paneling - 600mm (700/900XP) 				
• Rear paneling - 800mm (700/900)	PNC 206374			
• Rear paneling - 1000mm (700/900)	PNC 206375			
• Rear paneling - 1200mm (700/900)	PNC 206376			
Chimney grid net, 400mm	PNC 206400			
BASE SUPPORT FOR FEET/WHEELS 600M				
• - NOTTRANSLATED -	PNC 206467			
 2 side covering panels for free standing appliances 	PNC 216134			






Modular Cooking Range Line 900XP One Well Gas Fryer 15 liter

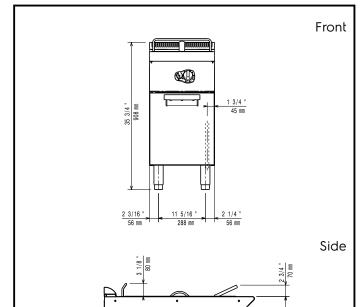

EQ G

4 15/16 * |
126 mm |
EQ = Equipotential screw
G = Gas connection

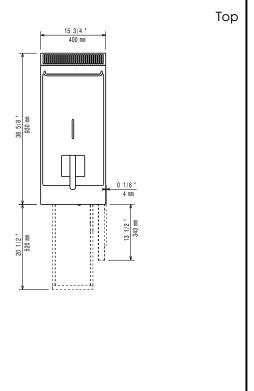

701 mm

3 15/16

Gas

Gas Power: 14 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG
Gas Inlet: 1/2"

Key Information:

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height):

Usable well dimensions

(depth): 380 mm

Well capacity: 13 lt MIN; 15 lt MAX
Thermostat Range: 120 °C MIN; 190 °C MAX

505 mm

Net weight:50 kgShipping weight:65 kgShipping height:1080 mmShipping width:460 mmShipping depth:1020 mmShipping volume:0.51 m³Certification group:N9FG1

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line 900XP One Well Gas Fryer 15 liter