



Modular Cooking Range Line 900XP Half Module Gas PowerGrill Top HP

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



391219 (E9GRGDGC0P)

* NOT TRANSLATED *

Main Features

- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by AISI441 stainless steel deflector reaching approx. 700°C; top and side radiant plates distribute evenly the heating power while protecting the deflector from direct contact with the dripping fat, thus reducing flare ups (PATENT US)
- Cooking grid reaching temperatures up to 350°C.
- Full-depth grease collection drawer, with hole to indicate when full, to collect residual cooking grease and fat. Can be filled-up with water for vapor-emission effect.
- Stainless-steel removable splash guards on the rear and sides
- All components (deflector, radiant plates, cooking grids, splash guards) can be dismantled for cleaning purposes.
- "Power Control" exclusive function: control knob allows fine-tuning of the power on a 240° rotation range between max and min, to optimize consumption while perfectly adapting to the food being cooked.
- "Stand-by" position on the control knob allows minimizing power consumption during non-peak periods, while allowing a fast recovery at the moment of need.
- The special design of the control knob system guarantees against water infiltration.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.
- Suitable for countertop installation.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Side and rear panel in AISI 304 stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- All the functional components are accessible via the front of the appliance.

Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Support for bridge type system, 800mm PNC 206137 ☐
- Support for bridge type system, 1000mm PNC 206138 ☐
- Support for bridge type system, 1200mm PNC 206139 ☐
- Support for bridge type system, 1400mm PNC 206140 ☐
- Support for bridge type system, 1600mm PNC 206141 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com



Electrolux
PROFESSIONAL

**Modular Cooking Range Line
900XP Half Module Gas PowerGrill
Top HP**

- | | | |
|--|------------|--------------------------|
| • Support for bridge type system, 400mm | PNC 206154 | ☐ |
| • Chimney upstand, 400mm | PNC 206303 | ☐ |
| • CHIMNEY UPSTAND 1000MM | PNC 206305 | ☐ |
| • BACK HANDRAIL 800 MM - MARINE | PNC 206308 | ☐ |
| • BACK HANDRAIL 1200 MM - MARINE | PNC 206309 | ☐ |
| • Kit scraper with hooks for HP grills | PNC 206347 | ☐ |
| • - NOT TRANSLATED - | PNC 206462 | ☐ |
| • Side handrail-right/left hand | PNC 216044 | ☐ |
| • Frontal handrail 400mm | PNC 216046 | ☐ |
| • Frontal handrail 800mm | PNC 216047 | ☐ |
| • Frontal handrail 1200mm | PNC 216049 | ☐ |
| • Frontal handrail 1600mm | PNC 216050 | ☐ |
| • Large handrail - portioning shelf, 400mm | PNC 216185 | ☐ |
| • Large handrail - portioning shelf, 800mm | PNC 216186 | ☐ |
| • Pressure regulator for gas units | PNC 927225 | ☐ |




**Modular Cooking Range Line
900XP Half Module Gas PowerGrill Top HP**


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.07.28

Front

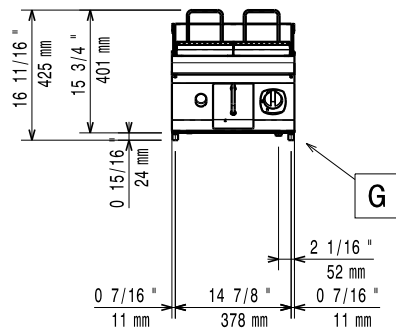


Side

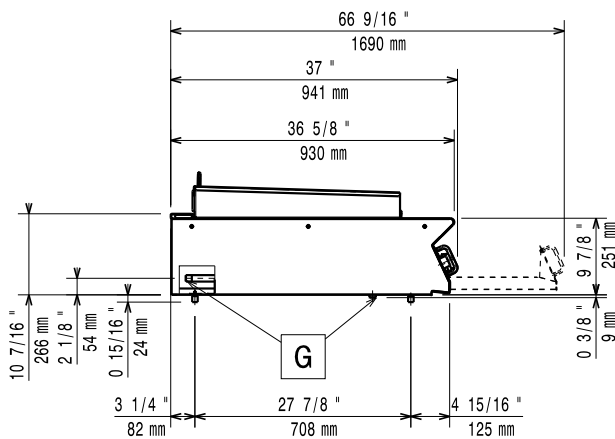

EQ = Equipotential screw
 G = Gas connection

Top

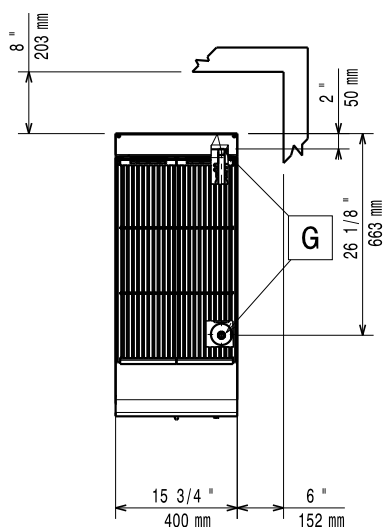

Gas

Gas Power:	10.5 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG; Natural Gas
Gas Inlet:	3/4"

Key Information:

External dimensions, Width:	400 mm
External dimensions, Depth:	930 mm
External dimensions, Height:	250 mm
Net weight:	60 kg
Shipping weight:	65 kg
Shipping height:	580 mm
Shipping width:	460 mm
Shipping depth:	1020 mm
Shipping volume:	0.27 m ³
Certification group:	N9EGG
Cooking surface width:	371 mm
Cooking surface depth:	644 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.