

Modular Cooking Range Line 900XP Two Wells Electric Fryer 15 liter

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



391088 (E9FREH2GF0)

15+15-It electric fryer with 2 "V" shaped wells (external heating elements) and 2 baskets

Short Form Specification

Item No.

High efficiency infrared heating elements (20kW) attached to the outside of the wells. Deep drawn V-Shaped wells. Oil drains through a tap into a container positioned under the wells. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

Main Features

- Deep drawn V-Shaped wells.
- Interior of wells with seamlessly laser-welded corners for ease of cleaning.
- External infrared heating elements for ease of cleaning of internal well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 2 baskets and 1 right and left side doors for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.

Sustainability

• [NOTTRANSLATED]



Included Accessories

 2 of Door for open base cupboard

• 2 of Full size basket for 14 and PNC 921691 15lt free standing fryers

Optional Accessories

Junction sealing kit
 PNC 206086 □
 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels.
 Flanged feet kit
 PNC 206135 □

 Frontal kicking strip for concrete installation, 800mm

PNC 206148 □

 Frontal kicking strip for concrete installation, 1000mm

APPROVAL:






Modular Cooking Range Line 900XP Two Wells Electric Fryer 15 liter


Frontal kicking strip for concrete installation, 1200mm	PNC 206151	
Frontal kicking strip for concrete installation, 1600mm	PNC 206152	
• 2 SIDE KICKING STRIPS- CONCRETE INST-900	PNC 206157	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177	
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178	
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
 Pair of side kicking strips (not for refr-freezer base) 	PNC 206180	
• 2 panels for service duct for single installation	PNC 206181	
• 2 panels for service duct for back to back installation	PNC 206202	
 4 feet for concrete installation 	PNC 206210	
 Sediment tray for 15lt fryers 	PNC 206235	
Oil drain pipe for 15lt free standing	PNC 206301	
fryer		_
 Chimney upstand, 800mm 	PNC 206304	
BACK HANDRAIL 800 MM - MARINE	PNC 206308	
BACK HANDRAIL 1200 MM - MARINE	PNC 206309	
 Door for open base cupboard 	PNC 206350	
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
• Chimney grid net, 400mm	PNC 206400	
• 2 side covering panels for free	PNC 216134	
standing appliances	PINC 210134	_
 Full size basket for 14 and 15lt free standing fryers 	PNC 921691	
 2 half size baskets for 14 and 15lt fryers 	PNC 921692	
• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	
Unclogging rod for 15lt drainage pipe	PNC 921695	
 Deflector for floured products for 15lt fryers 	PNC 921696	






Modular Cooking Range Line 900XP Two Wells Electric Fryer 15 liter





EI = Electrical inlet (power)
EQ = Equipotential screw

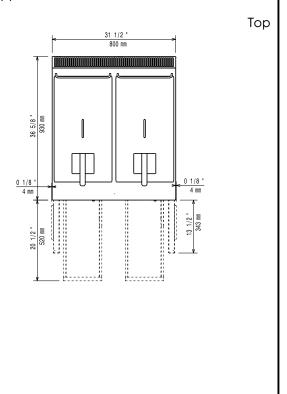

Electric

380-400 V/3N ph/50-60 Hz

Supply voltage:

Total Watts: 20 kW

Key Information:

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 505 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 13 It MIN; 15 It MAX
Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight:86 kgShipping weight:99 kgShipping height:1080 mmShipping width:1020 mmShipping depth:880 mmShipping volume:0.97 m³Certification group:EFE92M15

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

