



Modular Cooking Range Line 900XP 4-Hot Plates Electric Boiling Top

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



391040 (E9ECEH4Q00)

4-hot square plates (4 kW each) electric boiling top

391166 (E9ECEH4Q0N)

4-hot plate (4 kW each) electric boiling top

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. Four 4 kW square cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 4kW cast-iron plates are hermetically sealed to the one-piece top. Hot plates with a power of 4kW for each plate.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).
- Suitable for countertop installation.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com


Optional Accessories

- | | | |
|---|------------|--------------------------|
| • GN2/1 chrome grid for static oven (only for 391166) | PNC 164250 | ☐ |
| • Pair of cast iron plate bars for electric cooking top | PNC 206056 | ☐ |
| • Junction sealing kit | PNC 206086 | ☐ |
| • Support for bridge type system, 800mm | PNC 206137 | ☐ |
| • Support for bridge type system, 1000mm | PNC 206138 | ☐ |
| • Support for bridge type system, 1200mm | PNC 206139 | ☐ |
| • Support for bridge type system, 1400mm | PNC 206140 | ☐ |
| • Support for bridge type system, 1600mm | PNC 206141 | ☐ |
| • Water coulumn with swivel arm (water column extension not included) | PNC 206289 | ☐ |
| • Water column extension for 900 line | PNC 206290 | ☐ |
| • Chimney upstand, 800mm | PNC 206304 | ☐ |
| • BACK HANDRAIL 800 MM - MARINE | PNC 206308 | ☐ |
| • BACK HANDRAIL 1200 MM - MARINE | PNC 206309 | ☐ |
| • - NOT TRANSLATED - (only for 391040) | PNC 206395 | ☐ |
| • Chimney grid net, 400mm | PNC 206400 | ☐ |
| • Side handrail-right/left hand | PNC 216044 | ☐ |
| • Frontal handrail 800mm | PNC 216047 | ☐ |
| • Frontal handrail 1200mm | PNC 216049 | ☐ |
| • Frontal handrail 1600mm | PNC 216050 | ☐ |
| • Large handrail - portioning shelf, 400mm (only for 391166) | PNC 216185 | ☐ |
| • Large handrail - portioning shelf, 800mm | PNC 216186 | ☐ |
| • 2 side covering panels for top, d=900mm | PNC 216278 | ☐ |

Front

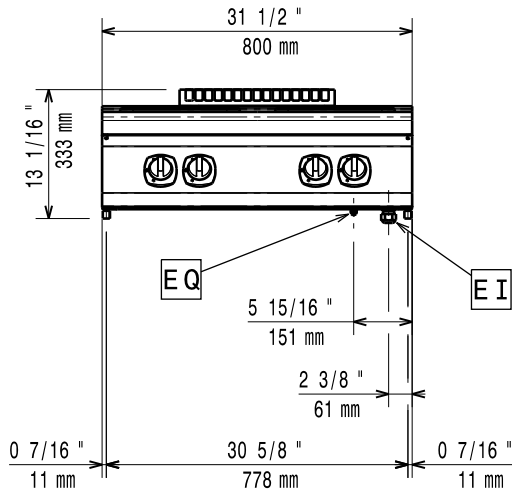


Side

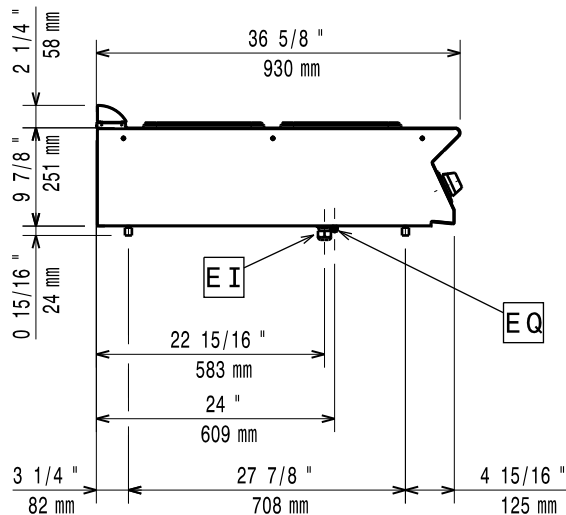

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

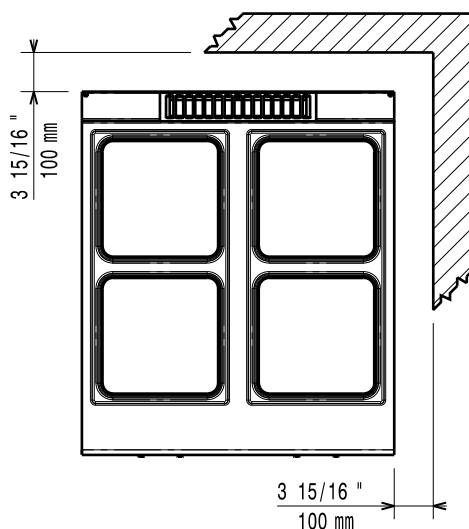

Electric

Supply voltage:

391040 (E9ECEH4Q00)

380-400 V/3N ph/50-60 Hz

391166 (E9ECEH4Q0N)

230 V/3 ph/50/60 Hz

Predisposed for:

Total Watts:

16 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

External dimensions, Width: 800 mm

External dimensions, Depth: 930 mm

External dimensions, Height: 250 mm

Net weight:

391040 (E9ECEH4Q00)

60 kg

391166 (E9ECEH4Q0N)

69 kg

Shipping weight:

72 kg

Shipping height:

530 mm

Shipping width:

391040 (E9ECEH4Q00)

1020 mm

391166 (E9ECEH4Q0N)

1010 mm

Shipping depth:

860 mm

Shipping volume:

0.46 m³

Certification group:

391040 (E9ECEH4Q00)

EH94T

391166 (E9ECEH4Q0N)

N9CE1

Front Plates Power:

4 - 4 kW

Back Plates Power:

4 - 4 kW

Front Plates dimensions:

300x300 300x300

Back Plates dimensions:

300x300 300x300