

Modular Cooking Range Line 900XP 6 Drawer Refrigerated Base

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



391600 (E9TTBECOMKN) * NOT TRANSLATED *

Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Unit can be easily installed below other 900 line top models.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

Construction

- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250

Sustainability



• CFC and HCFC free (highly ecological refrigerant type: R290).

Optional Accessories


- Flanged feet kit PNC 206136 📮 • Frontal kicking strip for concrete PNC 206152 🚨 installation, 1600mm Frontal kicking strip, 1600mm (not PNC 206179 for refr-freezer base)
- KIT 3 BASE SUPP.FOR WHEELS-PNC 206430 🗖 LENGHTWISE900
- KIT 6 WHEELS 3SWIVELLING PNC 206432 🗖
- WITH BRAKE-UK

APPROVAL:





Modular Cooking Range Line 900XP 6 Drawer Refrigerated Base

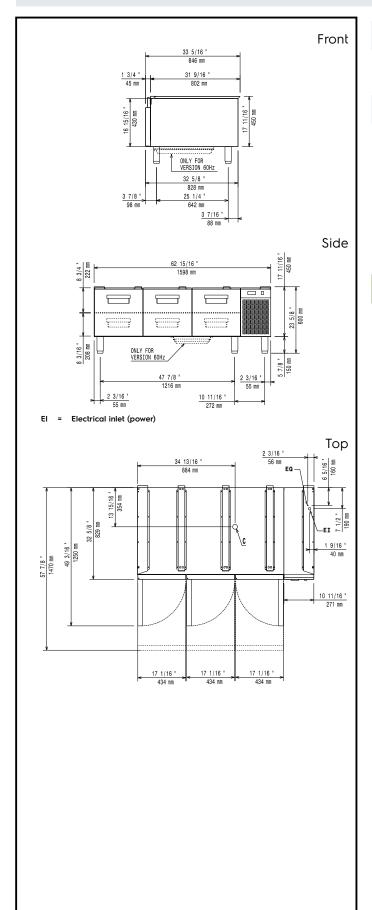

Electric

Supply voltage: 220-230 V/1N ph/50 Hz

Electrical power max.: 0.44 kW **Total Watts:** 0.44 kW

Key Information:

External dimensions, Width: 1600 mm External dimensions, Depth: 830 mm External dimensions, Height: 600 mm Net weight: 143 kg Shipping weight: 164 kg Shipping height: 840 mm Shipping width: 1040 mm Shipping depth: 1700 mm Shipping volume: 1.49 m³ Gross capacity: 240 lt

Sustainability

R290 Refrigerant type: Refrigerant weight: 85 g









