



Food Processor Cutter Mixer 4.5 LT - Single Speed with UK Plug

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



600544 (K45Y1V6IG)

* NOT TRANSLATED *

Main Features

- Table-mounted robust cutter and emulsifier allows fast liquidizing, mixing, chopping, mincing, and pastry-making.
- Emulsifier function (scraper) included as standard.
- Base fixed cover for a better handling.
- Lid with central opening to add ingredients in mid-cycle.
- All parts in contact with food are removable without the use of tools, completely dismantable and dishwasher safe.
- Flat and waterproof control panel with on/off button and pulse function.
- Microswitch and safety devices on handle, lid and bowl.
- Pulse function to coarse chopping.
- Productivity suitable for 50-100 meals per service.

Construction

- Stainless steel 4.5 liter bowl has a high chimney to ensure high productivity also when processing liquids (75% of the nominal capacity).
- 1 speed: 1.500 rpm.
- Transparent lid incorporates a magnetic contact safety system.
- Improved ventilation system to manage smoothly heavy duty use.
- Main on/off switch for added safety.
- Reinforced feet to withstand the repeated handling of the unit.
- Main switch ON/OFF on the back of the appliance.

Included Accessories

- | | |
|--|------------|
| • 1 of - NOT TRANSLATED - | PNC 650099 |
| • 1 of Stainless steel bowl, 4,5 lt capacity | PNC 653589 |
| • 1 of - NOT TRANSLATED - | PNC 653876 |

Optional Accessories

- | | |
|---|-------------------------------------|
| • - NOT TRANSLATED - | PNC 650099 <input type="checkbox"/> |
| • Stainless steel bowl, 4,5 lt capacity | PNC 653589 <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 653875 <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 653876 <input type="checkbox"/> |
| • - NOT TRANSLATED - | PNC 653877 <input type="checkbox"/> |

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com

Front




Side

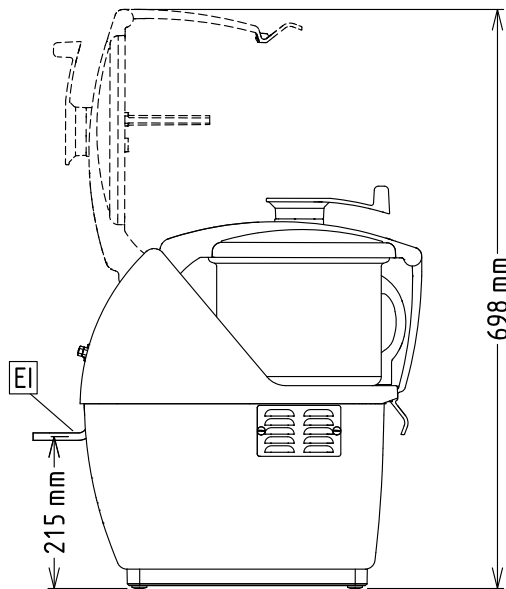

EI = Electrical inlet (power)

Top

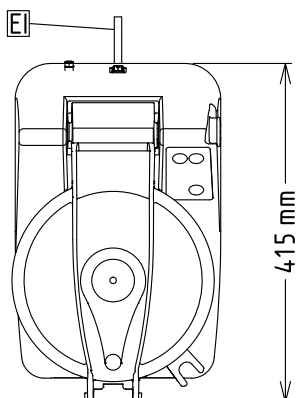

Electric

Supply voltage:	208-230 V/1N ph/60 Hz
Electrical power max.:	0.75 kW
Total Watts:	0.75 kW

Capacity:

Performance (up to):	2 kg/Cycle
Capacity:	4.5 litres

Key Information:

External dimensions, Width:	256 mm
External dimensions, Depth:	415 mm
External dimensions, Height:	482 mm
Shipping weight:	25 kg
Waterproof index:	IP23