Electrolux

217850 (ECOE61B2A1)

SkyLine Premium Electric Combi Oven 6GN1/1

0

SkyLine Premium combi

boiler oven with digital control, 6x1/1GN, electric, programmable, automatic

cleaning, boiler in AISI 316

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features • Digital interface with LED backlight buttons with guided selection. Built-in steam generator for highly precise humidity and temperature control according to the chosen settings

- Real humidity control based upon Lambda Sensor to automatically recognise quantity and size of food for consistent quality results.
- Dry, hot convection cycle (25 °C 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C 300 °C): combining convection heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C 99 °C): ideal for sous-vide, re-thermalization and delicate cookina. Steam cycle (100 °C): seafood and vegetables. High temperature steam (25 °C - 130 °C).
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Pre-set program for Regeneration, ideal for banqueting on plate or rethermalizing on tray.
- Programs mode: a maximum of 100 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 4-step cooking programs also available.
- Fan with 5 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Automatic fast cool down and pre-heat function.
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Capacity: 6 GN 1/1 trays.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness and temperature control thanks to a special design of the chamber.

Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy

APPROVAL:







SkyLine Premium Electric Combi Oven 6GN1/1

cleaning.

• Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

User Interface & Data Management

- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).

Sustainability




- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler (Registered Design at EPO).
- Reduced power function for customised slow cooking cycles.

Optional Accessories

Optional Accessories		
• External reverse osmosis filter for single tank Dishwashers with atmosphere boiler and Ovens	PNC 864388	
 - NOTTRANSLATED - 	PNC 920004	
 Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled one) 	PNC 922003	
 Pair of AISI 304 stainless steel grids, GN 1/1 	PNC 922017	
 Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 	PNC 922036	
 AISI 304 stainless steel grid, GN 1/1 	PNC 922062	
 Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2 	PNC 922086	
• External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)	PNC 922171	
 Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm 	PNC 922189	
Baking tray with 4 edges in perforated aluminum, 400x600x20mm	PNC 922190	
 Baking tray with 4 edges in aluminum, 400x600x20mm 	PNC 922191	
 Pair of frying baskets 	PNC 922239	
 AISI 304 stainless steel bakery/pastry grid 400x600mm 	PNC 922264	
 Double-step door opening kit 	PNC 922265	
 Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 	PNC 922266	
 Grease collection tray, GN 1/1, H=100 mm 	PNC 922321	
 Kit universal skewer rack and 4 long skewers for Lenghtwise ovens 	PNC 922324	
 Universal skewer rack 	PNC 922326	
 4 long skewers 	PNC 922327	
• Smoker for lengthwise and crosswise oven (4 kinds of smoker wood chips are available on request)	PNC 922338	
 Multipurpose hook 	PNC 922348	
 4 flanged feet for 6 & 10 GN , 2", 100-130mm 	PNC 922351	

 Grid for whole duck (8 per grid - 1,8kg each), GN 1/1 	PNC 922362	
Tray support for 6 & 10 GN 1/1 disassembled open base	PNC 922382	
Wall mounted detergent tank holder	PNC 922386	
 - NOT TRANSLATED - 	PNC 922390	
 - NOTTRANSLATED - 	PNC 922421	
 Tray rack with wheels, 6 GN 1/1, 65mm pitch (included) 	PNC 922600	
 Tray rack with wheels 5 GN 1/1, 80mm pitch 	PNC 922606	
 Bakery/pastry tray rack with wheels holding 400x600mm grids for 6 GN 1/1 oven and blast chiller freezer, 80mm pitch (5 runners) 	PNC 922607	
Slide-in rack with handle for 6 & 10 GN 1/1 oven	PNC 922610	
• Open base with tray support for 6 & 10 GN 1/1 oven	PNC 922612	
 Cupboard base with tray support for 6 & 10 GN 1/1 oven 	PNC 922614	
 Hot cupboard base with tray support for 6 & 10 GN 1/1 oven holding GN 1/1 or400x600mm 	PNC 922615	
External connection kit for detergent and rinse aid	PNC 922618	
 Grease collection kit for GN 1/1-2/1 cupboard base (trolley with 2 tanks, open/close device and drain) 	PNC 922619	
• Stacking kit for electric 6+6 GN 1/1 ovens or electric 6+10 GN 1/1 GN ovens	PNC 922620	
• Trolley for slide-in rack for 6 & 10 GN 1/1 oven and blast chiller freezer	PNC 922626	
 Trolley for mobile rack for 2 stacked 6 GN 1/1 ovens on riser 	PNC 922628	
• Trolley for mobile rack for 6 GN 1/1 on 6 or 10 GN 1/1 ovens	PNC 922630	
• Riser on feet for 2 6 GN 1/1 ovens or a 6 GN 1/1 oven on base	PNC 922632	
• Riser on wheels for stacked 2x6 GN 1/1 ovens, height 250mm	PNC 922635	
 Stainless steel drain kit for 6 & 10 GN oven, dia=50mm 	PNC 922636	
Plastic drain kit for 6 &10 GN oven, dia=50mm	PNC 922637	
 Trolley with 2 tanks for grease collection 	PNC 922638	
 Grease collection kit for open base (2 tanks, open/close device and drain) 	PNC 922639	
• Wall support for 6 GN 1/1 oven	PNC 922643	
 Dehydration tray, GN 1/1, H=20mm 	PNC 922651	
 Flat dehydration tray, GN 1/1 	PNC 922652	
 Open base for 6 & 10 GN 1/1 oven, disassembled 	PNC 922653	
 Bakery/pastry rack kit for 6 GN 1/1 oven with 5 racks 400x600mm and 80mm pitch 	PNC 922655	
 Stacking kit for gas 6 GN 1/1 oven placed on 7kg and 15kg crosswise blast chiller freezer 	PNC 922657	
 Heat shield for stacked ovens 6 GN 1/1 on 6 GN 1/1 	PNC 922660	
Heat shield for stacked ovens 6 GN 1/1 on 10 GN 1/1	PNC 922661	





The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



SkyLine Premium Electric Combi Oven 6GN1/1

•	Heat shield for 6 GN 1/1 oven	PNC 922662	
•	Compatibility kit for installation of 6 GN 1/1 electric oven on previous 6 GN 1/1 electric oven	PNC 922679	
•	Fixed tray rack for 6 GN 1/1 and 400x600mm grids	PNC 922684	
•	Kit to fix oven to the wall	PNC 922687	
•	Tray support for 6 & 10 GN 1/1 open base	PNC 922690	
•	4 adjustable feet with black cover for 6 & 10 GN ovens, 150-200mm	PNC 922693	
٠	Detergent tank holder for open base	PNC 922699	
•	Bakery/pastry runners 400x600mm for 6 & 10 GN 1/1 oven base	PNC 922702	
٠	Wheels for stacked ovens	PNC 922704	
٠	Mesh grilling grid	PNC 922713	
٠	Probe holder for liquids	PNC 922714	
•	Odourless hood with fan for 6 & 10 GN 1/1 electric ovens	PNC 922718	
•	Odourless hood with fan for 6+6 or 6+10 GN 1/1 electric ovens	PNC 922722	
•	Condensation hood with fan for 6 & 10 GN 1/1 electric oven	PNC 922723	
•	Condensation hood with fan for stacking 6+6 or 6+10 GN 1/1 electric ovens	PNC 922727	
•	Exhaust hood with fan for 6 & 10 GN 1/1 ovens	PNC 922728	
•	Exhaust hood with fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922732	
•	Exhaust hood without fan for 6&10 1/1GN ovens	PNC 922733	
•	Exhaust hood without fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922737	
٠	Fixed tray rack, 5 GN 1/1, 85mm pitch	PNC 922740	
•	4 high adjustable feet for 6 & 10 GN ovens, 230-290mm	PNC 922745	
•	Tray for traditional static cooking, H=100mm	PNC 922746	
	Double-face griddle, one side ribbed and one side smooth, 400x600mm	PNC 922747	
	- NOTTRANSLATED -	PNC 922752	
	- NOTTRANSLATED -	PNC 922773	
٠	- NOT TRANSLATED -	PNC 922774	
٠	- NOT TRANSLATED -	PNC 922776	
•	Non-stick universal pan, GN 1/1, H=20mm	PNC 925000	
•	Non-stick universal pan, GN 1/ 1, H=40mm	PNC 925001	
•	Non-stick universal pan, GN 1/1, H=60mm	PNC 925002	
•	Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003	
٠	Aluminum grill, GN 1/1	PNC 925004	
	Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1	PNC 925005	
٠	Flat baking tray with 2 edges, GN 1/1	PNC 925006	
٠	Baking tray for 4 baguettes, GN 1/1	PNC 925007	
٠	Potato baker for 28 potatoes, GN 1/1	PNC 925008	
٠	Non-stick universal pan, GN 1/2,	PNC 925009	
	H=20mm		_
•	Non-stick universal pan, GN 1/2, H=40mm	PNC 925010	

• Non-stick universal pan, GN 1/2, PNC 925011 H=60mm

PNC 0S2394

Compatibility kit for installation on PNC 930217 previous base GN 1/1

Recommended Detergents


- *NOT TRANSLATED*
- C22-CLEANING TAB;100 BAGS; 1 TAB = PNC 0S2395 65GR ADR & IMDG Limited Quantity



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

SkyLine Premium Electric Combi Oven 6GN1/1

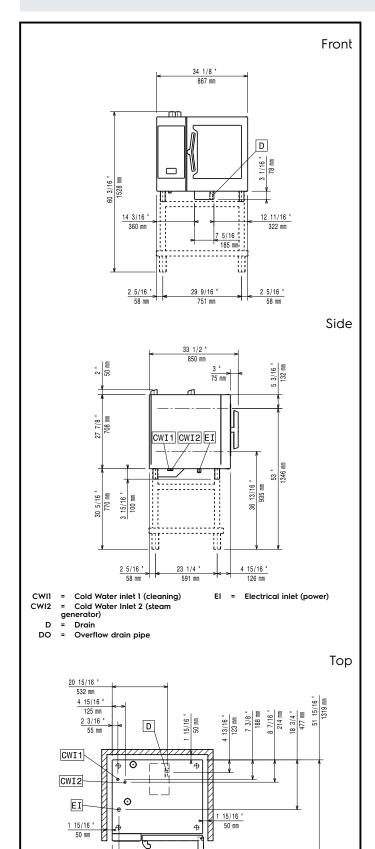

ERGOCERT

Intertek

2 9/16 " 65 mm

CE IEC IEC

Electric

Default power corresponds to fa When supply voltage is declared performed at the average value. installed power may vary within t Circuit breaker required Supply voltage: Electrical power max.: Electrical power, default:	I as a range the test is According to the country, the				
Water:					
Max inlet water supply temperature: Water inlet connections "CWI1- CWI2": Pressure, bar min/max: Chlorides: Conductivity: Drain "D": Electrolux Professional recomm based on testing of specific wate					
Please refer to user manual for d information.					
Installation:					
Clearance: Suggested clearance for service access:	Clearance: 5 cm rear and right hand sides. 50 cm left hand side.				
Capacity:					
Trays type: Max load capacity:	6 (GN 1/1) 30 kg				
Key Information:					
Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Weight: Net weight: Shipping weight: Shipping volume:	Right Side 867 mm 775 mm 808 mm 114 kg 114 kg 131 kg 0.85 m ³				
ISO Certificates					
ISO Standards:	ISO 9001; ISO 14001; ISO				

ISO Standards:

ISO 9001; ISO 14001; ISC 45001; ISO 50001

SkyLine Premium Electric Combi Oven 6GN1/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.