

SkyLine Pro Electric Combi Oven 6GN1/1

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



217910 (ECOE61C2C0)

SkyLine Pro combi boilerless oven with digital control, 6x1/1GN, electric, programmable, automatic cleaning

217920 (ECOE61C2A0)

SkyLine Pro combi boilerless oven with digital control, 6x1/1GN, electric, programmable, automatic cleaning

Main Features

- Boilerless steaming function to add and retain moisture for high quality, consistent cooking results.
- Dry hot convection cycle (max 300 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation.
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Programs mode: a maximum of 100 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 4-step cooking programs also available
- Fan with 5 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Automatic fast cool down and pre-heat function.
- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Capacity: 6 GN 1/1 trays.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness and temperature control thanks to a special design of the chamber.

Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

User Interface & Data Management

- Digital interface with LED backlight buttons with guided selection.
- USB port to download HACCP data, share cooking programs and configurations.
 USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).

Sustainability



• Human centered design with 4-star certification for



SkyLine Pro Electric Combi Oven 6GN1/1

	ergonomics and usability.	: al la suu al a		•	Open base with tray support for 6 & 10 GN 1/1 oven	PNC 922612	
•	Wing-shaped handle with ergonomic des opening with the elbow, making mana (Registered Design at EPO).			•	Cupboard base with tray support for 6 & 10 GN 1/1 oven	PNC 922614	
(Optional Accessories			•	Hot cupboard base with tray support for 6 & 10 GN 1/1 oven holding GN 1/1	PNC 922615	
	- NOT TRANSLATED -	PNC 920004			or400x600mm		
				•	External connection kit for detergent	PNC 922618	
•	Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled one)	PNC 922003		•	and rinse aid Grease collection kit for GN 1/1-2/1	PNC 922619	
•	Pair of AISI 304 stainless steel grids, GN 1/1	PNC 922017			cupboard base (trolley with 2 tanks, open/close device and drain)	PNC 922620	
•	Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922036			o Stacking kit for electric 6+6 GN 1/1 ovens or electric 6+10 GN 1/1 GN ovens		
•	AISI 304 stainless steel grid, GN 1/1	PNC 922062		•	 Trolley for slide-in rack for 6 & 10 GN 1/1 oven and blast chiller freezer 	PNC 922626	
•	Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2	PNC 922086		•	Trolley for mobile rack for 2 stacked 6 GN 1/1 ovens on riser	PNC 922628	
•	External side spray unit (needs to be mounted outside and includes support	PNC 922171		•	Trolley for mobile rack for 6 GN 1/1 on 6 or 10 GN 1/1 ovens	PNC 922630	
	to be mounted on the oven)	D. I.O. 000100		•	Riser on feet for 2 6 GN 1/1 ovens or a 6	PNC 922632	
•	Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm	PNC 922189		•	GN 1/1 oven on base Riser on wheels for stacked 2x6 GN 1/1	PNC 922635	
	O .	PNC 922190			ovens, height 250mm		
	aluminum, 400x600x20mm Baking tray with 4 edges in aluminum,	PNC 922191	_		 Stainless steel drain kit for 6 & 10 GN oven, dia=50mm 	PNC 922636	
_	400x600x20mm	1110 722171	_	•	Plastic drain kit for 6 &10 GN oven,	PNC 922637	
•	Pair of frying baskets	PNC 922239		_	dia=50mm Trolley with 2 tanks for grease	PNC 922638	
•	AISI 304 stainless steel bakery/pastry grid 400x600mm	PNC 922264			collection		
•	Double-step door opening kit	PNC 922265		•	Grease collection kit for open base (2 tanks, open/close device and drain)	PNC 922639	
•	Grid for whole chicken (8 per grid -	PNC 922266		•	Wall support for 6 GN 1/1 oven	PNC 922643	
	1,2kg each), GN 1/1				Dehydration tray, GN 1/1, H=20mm	PNC 922651	
•	Grease collection tray, GN 1/1, H=100	PNC 922321			Flat dehydration tray, GN 1/1	PNC 922652	_
	mm	DVIC 000707			Open base for 6 & 10 GN 1/1 oven,	PNC 922653	_
	Kit universal skewer rack and 4 long skewers for Lenghtwise ovens	PNC 922324			disassembled Bakery/pastry rack kit for 6 GN 1/1 oven		_
	Universal skewer rack	PNC 922326		•	with 5 racks 400x600mm and 80mm	FINC 722033	_
•	4 long skewers	PNC 922327			pitch		
•	Smoker for lengthwise and crosswise oven (4 kinds of smoker wood chips are available on request)	PNC 922338		•	 Stacking kit for gas 6 GN 1/1 oven placed on 7kg and 15kg crosswise blast chiller freezer 	PNC 922657	
•	Multipurpose hook	PNC 922348		•	Heat shield for stacked ovens 6 GN 1/1	PNC 922660	
•	4 flanged feet for 6 & 10 GN , 2", 100-130mm	PNC 922351			on 6 GN 1/1 Heat shield for stacked ovens 6 GN 1/1	PNC 922661	
•	Grid for whole duck (8 per grid - 1,8kg each), GN 1/1	PNC 922362		•	on 10 GN 1/1 Heat shield for 6 GN 1/1 oven	PNC 922662	
•	Tray support for 6 & 10 GN 1/1 disassembled open base	PNC 922382			Compatibility kit for installation of 6 GN 1/1 electric oven on previous 6 GN 1/1		
•	Wall mounted detergent tank holder	PNC 922386			electric oven		
•	- NOTTRANSLATED -	PNC 922390		•	Fixed tray rack for 6 GN 1/1 and	PNC 922684	
•	- NOTTRANSLATED -	PNC 922421			400x600mm grids		
•	- NOTTRANSLATED -	PNC 922438		•	Kit to fix oven to the wall	PNC 922687	
	Tray rack with wheels, 6 GN 1/1, 65mm pitch (included)	PNC 922600		•	Tray support for 6 & 10 GN 1/1 open base	PNC 922690	
•	Tray rack with wheels 5 GN 1/1, 80mm pitch	PNC 922606		•	4 adjustable feet with black cover for 6 & 10 GN ovens, 150-200mm	PNC 922693	
•	Bakery/pastry tray rack with wheels	PNC 922607		•	Detergent tank holder for open base	PNC 922699	
	holding 400x600mm grids for 6 GN 1/1 oven and blast chiller freezer, 80mm		_		Bakery/pastry runners 400x600mm for 6 & 10 GN 1/1 oven base	PNC 922702	
	pitch (5 runners)			•	Wheels for stacked ovens	PNC 922704	
•	Slide-in rack with handle for 6 & 10 GN 1/1 oven	PNC 922610		•	Mesh grilling grid	PNC 922713	











SkyLine Pro Electric Combi Oven 6GN1/1

Probe holder for liquidsOdourless hood with fan for 6 & 10 GN	PNC 922714 PNC 922718	
 1/1 electric ovens Odourless hood with fan for 6+6 or 6+10 GN 1/1 electric ovens 	PNC 922722	
Condensation hood with fan for 6 & 10 GN 1/1 electric oven	PNC 922723	
Condensation hood with fan for stacking 6+6 or 6+10 GN 1/1 electric ovens	PNC 922727	
 Exhaust hood with fan for 6 & 10 GN 1/1 ovens 	PNC 922728	
• Exhaust hood with fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922732	
• Exhaust hood without fan for 6&10 1/1GN ovens	PNC 922733	
• Exhaust hood without fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922737	
 Fixed tray rack, 5 GN 1/1, 85mm pitch 	PNC 922740	
 4 high adjustable feet for 6 & 10 GN ovens, 230-290mm 	PNC 922745	
 Tray for traditional static cooking, H=100mm 	PNC 922746	
 Double-face griddle, one side ribbed and one side smooth, 400x600mm 	PNC 922747	
- NOTTRANSLATED -	PNC 922752	
• - NOTTRANSLATED -	PNC 922773	
• - NOTTRANSLATED -	PNC 922774	\Box
• - NOTTRANSLATED -	PNC 922776	
• Non-stick universal pan, GN 1/1, H=20mm	PNC 925000	
 Non-stick universal pan, GN 1/1, H=40mm 	PNC 925001	_
• Non-stick universal pan, GN 1/1, H=60mm	PNC 925002	_
 Double-face griddle, one side ribbed and one side smooth, GN 1/1 	PNC 925003	
 Aluminum grill, GN 1/1 	PNC 925004	
 Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 	PNC 925005	
 Flat baking tray with 2 edges, GN 1/1 	PNC 925006	
 Baking tray for 4 baguettes, GN 1/1 	PNC 925007	
 Potato baker for 28 potatoes, GN 1/1 	PNC 925008	
Non-stick universal pan, GN 1/2, H=20mm	PNC 925009	
 Non-stick universal pan, GN 1/2, H=40mm 	PNC 925010	
 Non-stick universal pan, GN 1/2, H=60mm 	PNC 925011	
 Compatibility kit for installation on previous base GN 1/1 	PNC 930217	
Pacammandad Datarganta		
Recommended Detergents	B) 10 22255	_
NOTTRANSLATED	PNC 0S2394	
C22-CLEANING TAB;100 BAGS; 1 TAB = 65GR ADR & IMDG Limited Quantity	PNC 0S2395	















SkyLine Pro Electric Combi Oven 6GN1/1






CWI1 = Cold Water inlet 1 (cleaning) CWI2 = Cold Water Inlet 2 (steam

2 = Cold Water Inlet 2 (steam generator)

= Drain

DO = Overflow drain pipe

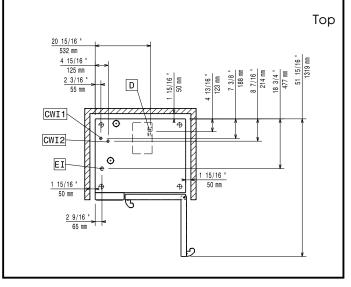

Electric

Circuit breaker required

Supply voltage:

217910 (ECOE61C2C0) 220-240 V/3 ph/50-60 Hz **217920 (ECOE61C2A0)** 380-415 V/3N ph/50-60 Hz

Electrical power max.: 11.8 kW
Electrical power, default: 11.1 kW

Water:

Max inlet water supply

temperature: 30 °C

Water inlet connections "CWI1-

 CW12":
 3/4"

 Pressure, bar min/max:
 1-6 bar

 Chlorides:
 <10 ppm</td>

 Conductivity:
 >50 µS/cm

 Drain "D":
 50mm

Electrolux Professional recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality

information.

Installation:

Clearance: 5 cm rear and

Clearance: right hand sides.

Suggested clearance for

service access: 50 cm left hand side.

Capacity:

Trays type: 6 (GN 1/1)
Max load capacity: 30 kg

Key Information:

Door hinges:Right SideExternal dimensions, Width:867 mmExternal dimensions, Depth:775 mmExternal dimensions, Height:808 mmWeight:107 kgNet weight:107 kgShipping weight:124 kgShipping volume:

217910 (ECOE61C2C0) 0.85 m³ **217920 (ECOE61C2A0)** 0.89 m³

SkyLine Pro Electric Combi Oven 6GN1/1









