

Warewashing Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


506054 (EPPWELG)

Electric pot&pan washer with electronic control, drain pump, detergent and rinse aid dispenser

506055 (EPPWELG60)

* NOT TRANSLATED *

Short Form Specification

Item No. _____

304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. Double skinned insulated door divided in 2 parts with 180° frontal opening. N. 4 washing cycles. Built-in atmospheric, insulated water boiler (10,5 kW), 18-l

Main Features

- Atmospheric insulated boiler combined with the rinse booster pump for perfect rinsing results (water temperature and pressure always constant during rinsing cycles), independent from the inlet water pressure.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- Available upon request, pre-arranged model for HACCP implementation (both basic as well as integrated system).
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Open air gap in compliance with WRC regulations.
- 4 washing programs (one program is continual).
- Equipped with drain pump and built-in detergent dispenser for easy and quick installation without opening the machine.
- Easier access to the washing chamber thanks to the 180° frontal opening door.
- Requires limited space for opening thanks to the door divided in 2 sections.
- Self-cleaning cycle.
- Low noise level.
- Simple electronic control panel.
- Fault auto-diagnosis system.
- Simple service from the front.

Construction

- 304 stainless steel boiler with higher welding protection to increase resistance to corrosion.
- Only one cable for electrical connection.
- External connecting board protected by a waterproof plastic box.
- Unit to feature smooth surfaces to facilitate cleaning.
- Easy to remove pump and tank filters.
- Large strainer box above the water surface for frequent cleaning operations.
- Equipped with side washing arms in addition to upper and lower wash arms.
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Unit to feature rinse aid dispenser pump.

Sustainability



- Finished in top quality materials to ensure durability.
- Double skin insulated door to reduce heat dispersion.

APPROVAL: _____



Electrolux
PROFESSIONAL

Warewashing Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

- Pre-arranged to be connected to Energy Management device.



**Warewashing
Large Pot & Pan Washer with Drain Pump & Detergent Dispenser**
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.08.06

Included Accessories

- 2 of EXTRA RACK FOR CONTAINERS AND TRAYS PNC 864182
- 1 of S/S BASKET FOR POT WASHER,1351 MM PNC 864192

Optional Accessories


- FILTER FOR TOTAL DEMINERALIZATION PNC 864015 ☐
- Filter for partial demineralization PNC 864017 ☐
- Kit to measure total and partial water hardness PNC 864050 ☐
- EXTRA RACK FOR CONTAINERS AND TRAYS PNC 864182 ☐
- S/S BASKET FOR POT WASHER,1351 MM PNC 864192 ☐
- Filter for total demineralization PNC 864367 ☐
- KIT FOR 9 TRAYS IN POTWASHER PNC 864471 ☐




Electrolux
PROFESSIONAL

Warewashing Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

Front

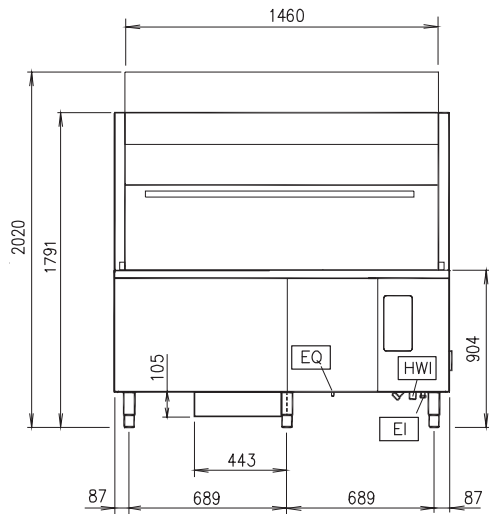


Side

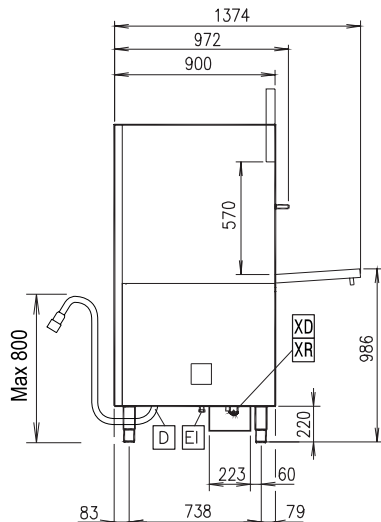

D = Drain
EI = Electrical inlet (power)
EO = Electrical Outlet
HWI = Hot water inlet
XD = Detergent connection
XR = Rinse aid connection

Top

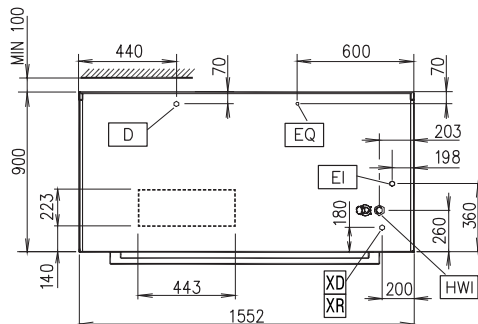

Electric

Supply voltage:

506054 (EPPWELG)	400 V/3N ph/50 Hz
506055 (EPPWELG60)	380-400 V/3N ph/60 Hz

Electrical power max.: 26 kW

Default Installed Power: 17 kW

Wash pump power: 5 kW

Water:

Pressure, bar min/max: 0.5-7 bar

Washing cycle electrical elements: 10,5 kW

Hot rinse cycle duration (sec.): ISO 9001; ISO 14001

Water supply temperature*: 50 °C

Washing tank capacity (lt): 150

Boiler Capacity (lt): 18

Key Information:

Rinsing water consumption (per cycle):	12 lt
Washing cycle temperature:	55-65 °C
Hot rinse cycle temperature:	84 °C
N° of working cycles:	4 (180/360/540/inf)
Cell dimensions - width:	1340 mm
Cell dimensions - depth:	710 mm
Cell dimensions - height:	570 mm
External dimensions, Width:	1552 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	1791 mm
Net weight:	300 kg
Shipping weight:	
506054 (EPPWELG)	352 kg
506055 (EPPWELG60)	340 kg
Shipping height:	
506054 (EPPWELG)	2050 mm
506055 (EPPWELG60)	2200 mm
Shipping width:	
506054 (EPPWELG)	1000 mm
506055 (EPPWELG60)	1800 mm
Shipping depth:	
506054 (EPPWELG)	1650 mm
506055 (EPPWELG60)	1100 mm
Shipping volume:	
506054 (EPPWELG)	3.38 m³
506055 (EPPWELG60)	4.36 m³



Warewashing
Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.08.06