



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line thermaline 80 - Half Module Electric Fry Top, 1 Side

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



- 588056 (MAHMAADOAO)** Electric fry top with smooth chrome plate, one-side operated
- 588064 (MAHNAADOAO)** Electric fry top with ribbed chrome plate, one-side operated

### Short Form Specification

#### Item No. \_\_\_\_\_

Unit constructed according to DIN 18860\_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Chromium-plated mild steel cooking surface with non-stick finishing for optimal grilling. Powerblock heating system for optimal temperature distribution. Large drain hole allows draining of cooking juices into a large collector. Overheat protection switches off the supply in case of overheating. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. IPX5 water resistant certification.

Configuration: One-side operated top. The base needs to be supplied by the factory. Please include appropriate base.

### Main Features

- Large drain hole on cooking surface permits the draining of residual cooking juices into a large collector placed under the cooking surface.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- Units have separate controls for each half module of the cooking surface.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal-covered knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Powerblock heating system for optimal temperature distribution.

### Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Cooking surface in chromium-plated mild steel with non-stick finishing for optimum grilling results.
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top.
- Cooking surface to be completely smooth or completely ribbed.

### Sustainability

- Standby function for energy saving and fast recovery of maximum power.



APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

### Optional Accessories

|                                                                                                |            |
|------------------------------------------------------------------------------------------------|------------|
| • Connecting rail kit, 800mm                                                                   | PNC 912500 |
| • Portioning shelf, 400mm width                                                                | PNC 912522 |
| • Portioning shelf, 400mm width                                                                | PNC 912552 |
| • Folding shelf, 300x800mm                                                                     | PNC 912577 |
| • Folding shelf, 400x800mm                                                                     | PNC 912578 |
| • Fixed side shelf, 200x800mm                                                                  | PNC 912583 |
| • Fixed side shelf, 300x800mm                                                                  | PNC 912584 |
| • Fixed side shelf, 400x800mm                                                                  | PNC 912585 |
| • Connecting rail kit, right                                                                   | PNC 912971 |
| • Connecting rail kit, left                                                                    | PNC 912972 |
| • Endrail kit, flush-fitting, left                                                             | PNC 913109 |
| • Endrail kit, flush-fitting, right                                                            | PNC 913110 |
| • Endrail kit (12mm) for thermaline 80 units, left                                             | PNC 913200 |
| • Endrail kit (12mm) for thermaline 80 units, right                                            | PNC 913201 |
| • T-connection rail for back to back installations without backsplash                          | PNC 913227 |
| • INSERT.PROFILE,D800,TL-OTHER BRANDS                                                          | PNC 913230 |
| • - NOT TRANSLATED -                                                                           | PNC 913244 |
| • - NOT TRANSLATED -                                                                           | PNC 913249 |
| • - NOT TRANSLATED -                                                                           | PNC 913250 |
| • - NOT TRANSLATED -                                                                           | PNC 913253 |
| • - NOT TRANSLATED -                                                                           | PNC 913254 |
| • FILTER W=400MM                                                                               | PNC 913663 |
| • ELECTRIC MAINSWITCH 25A 4mm <sup>2</sup> NM FOR MODULAR H800 ELECTRIC UNITS (FACTORY FITTED) | PNC 913676 |

### Recommended Detergents

|                    |            |                          |
|--------------------|------------|--------------------------|
| • *NOT TRANSLATED* | PNC 0S2292 | <input type="checkbox"/> |
|--------------------|------------|--------------------------|

### Electric

|                                          |                      |
|------------------------------------------|----------------------|
| <input type="checkbox"/> Supply voltage: | 400 V/3N ph/50/60 Hz |
| <input type="checkbox"/> Total Watts:    | 5.1 kW               |

### Key Information:

|                                                       |                       |
|-------------------------------------------------------|-----------------------|
| <input type="checkbox"/> Cooking Surface Depth:       | 615 mm                |
| <input type="checkbox"/> Cooking Surface Width:       | 300 mm                |
| <input type="checkbox"/> Working Temperature MIN:     | 80 °C                 |
| <input type="checkbox"/> Working Temperature MAX:     | 280 °C                |
| <input type="checkbox"/> External dimensions, Width:  | 400 mm                |
| <input type="checkbox"/> External dimensions, Depth:  | 800 mm                |
| <input type="checkbox"/> External dimensions, Height: | 250 mm                |
| <input type="checkbox"/> Net weight:                  | 69 kg                 |
| <input type="checkbox"/> Configuration:               | One-Side Operated;Top |

|                                                      |                                   |
|------------------------------------------------------|-----------------------------------|
| <input type="checkbox"/> Cooking surface type:       |                                   |
| <input type="checkbox"/> 588056 (MAHMAADOAO)         | Smooth                            |
| <input type="checkbox"/> 588064 (MAHNAADOAO)         | Ribbed                            |
| <input type="checkbox"/> Cooking surface - material: | Chromium Plated mild steel mirror |

### Sustainability


|                                               |          |
|-----------------------------------------------|----------|
| <input type="checkbox"/> Current consumption: | 7.4 Amps |
|-----------------------------------------------|----------|




**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line thermaline 80 - Half Module Electric Fry Top, 1 Side

Front

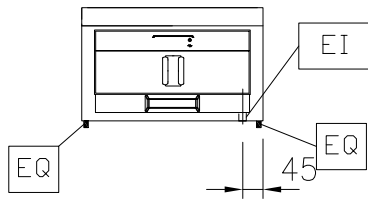


Side

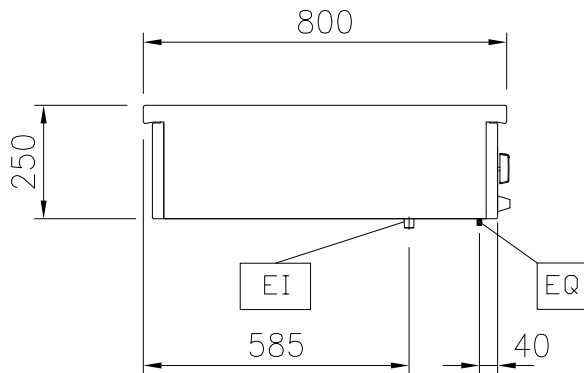


EI = Electrical inlet (power)  
EQ = Equipotential screw


Top

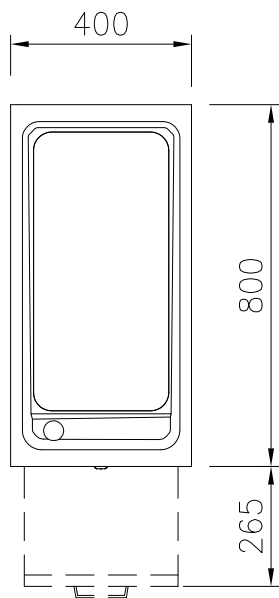

Front

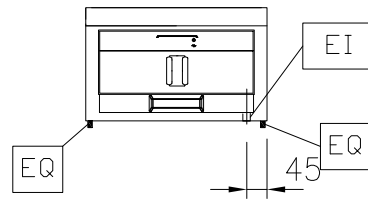


Side

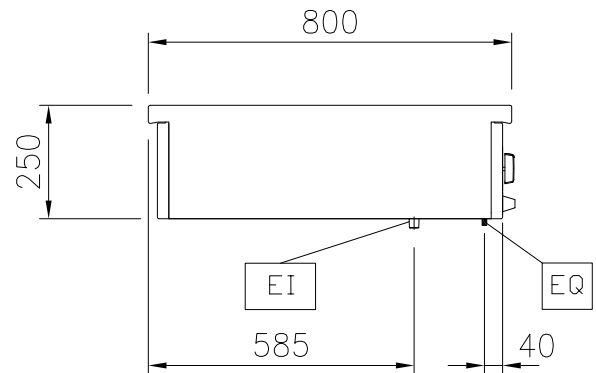

EI = Electrical inlet (power)  
EQ = Equipotential screw

Top

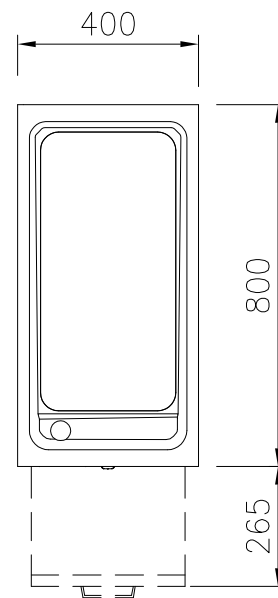

Modular Cooking Range Line  
thermaline 80 - Half Module Electric Fry Top, 1 Side  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2026.08.31