

Modular Cooking Range Line thermale 80 - Electric Bain Marie Top, Rear Tap, 1/1GN, 1 Side

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



588086 (MABAAADOAO)

Electric bain marie top, with
rear tap, one-side operated,
1/1 GN

Short Form Specification

Item No.

Unit constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Water basin in 1.4435 (AISI 316L) stainless steel, seamlessly welded into the top of the appliance. Automatic two-speed constant water level re-fill and water temperature regulated by sensors. Safety systems and automatic low-water level shut-off protect against overheating. All-round basin raised edges to protect against soil infiltration. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. IPX5 water resistance certification. Configuration: One-side operated top with rear mixing tap.

Main Features

- Filling water level is plate-marked on the side of the well.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Easy to clean basin with rounded corners.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal-covered knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Water temperature controlled by electronic sensor and can be selected as either temperature or power levels.
- Safety systems protect against overtemperature and can be manually reset.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- IPX5 water resistance certification.
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Water basin in 1.4435 (AISI 316L) stainless steel is seamlessly welded into the top of the appliance.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Sustainability

- Standby function for energy saving and fast recovery of maximum power.

APPROVAL: _____

Optional Accessories


• Connecting rail kit, 800mm	PNC 912500	☐
• Portioning shelf, 400mm width	PNC 912522	☐
• Portioning shelf, 400mm width	PNC 912552	☐
• Folding shelf, 300x800mm	PNC 912577	☐
• Folding shelf, 400x800mm	PNC 912578	☐
• Fixed side shelf, 200x800mm	PNC 912583	☐
• Fixed side shelf, 300x800mm	PNC 912584	☐
• Fixed side shelf, 400x800mm	PNC 912585	☐
• Connecting rail kit, right	PNC 912971	☐
• Connecting rail kit, left	PNC 912972	☐
• Endrail kit, flush-fitting, left	PNC 913109	☐
• Endrail kit, flush-fitting, right	PNC 913110	☐
• Lid for aquacooker 1/1 GN and bain marie 1/1 GN	PNC 913139	☐
• Endrail kit (12mm) for thermaline 80 units, left	PNC 913200	☐
• Endrail kit (12mm) for thermaline 80 units, right	PNC 913201	☐
• T-connection rail for back to back installations without backsplash	PNC 913227	☐
• INSERT.PROFILE,D800,TL-OTHER BRANDS	PNC 913230	☐
• - NOT TRANSLATED -	PNC 913244	☐
• - NOT TRANSLATED -	PNC 913249	☐
• - NOT TRANSLATED -	PNC 913250	☐
• - NOT TRANSLATED -	PNC 913253	☐
• - NOT TRANSLATED -	PNC 913254	☐
• GN divider set for Bain-marie	PNC 913297	☐
• - NOT TRANSLATED -	PNC 913657	☐
• FILTER W=400MM	PNC 913663	☐
• ELECTRIC MAINSWITCH 25A 4mm ² NM FOR MODULAR H800 ELECTRIC UNITS (FACTORY FITTED)	PNC 913676	☐




Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 80 - Electric Bain Marie Top, Rear Tap, 1/1GN, 1 Side

Front

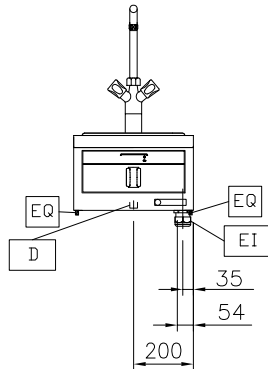


Side

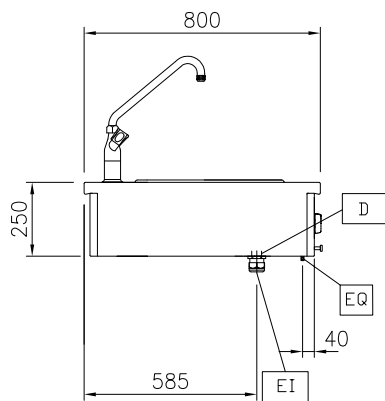

D = Drain
EI = Electrical inlet (power)
EQ = Equipotential screw
WI = Water inlet

Top

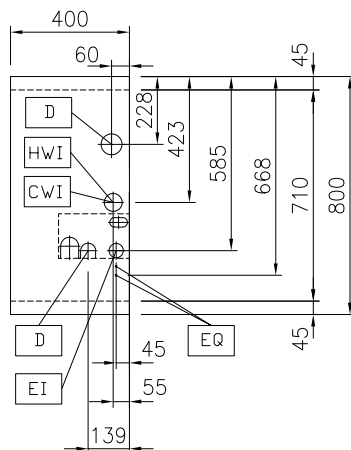

Electric

Supply voltage: 400 V/3N ph/50/60 Hz
Total Watts: 1.5 kW

Water:

Inlet water line size: 3/4"
Incoming Cold/hot Water line size: 3/4"
Drain line size: 1"

Key Information:

Number of wells: 1
Usable well dimensions (width): 307 mm
Usable well dimensions (height): 170 mm
Usable well dimensions (depth): 509 mm
Well capacity: 5 lt MIN; 32 lt MAX
Thermostat Range: 30 °C MIN; 90 °C MAX
External dimensions, Width: 400 mm
External dimensions, Depth: 800 mm
External dimensions, Height: 250 mm
Net weight: 15 kg
Configuration: One-Side Operated;Top

Sustainability

Current consumption: 3.8 Amps



Modular Cooking Range Line
thermaline 80 - Electric Bain Marie Top, Rear Tap, 1/1GN, 1 Side

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.08.26