

**Modular Cooking Range Line  
 thermaline 80 - Full Module  
 Freestanding Electric Fry Top, 1 Side,  
 H=800**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**588372 (MAHBFAHDAO)**

Electric fry top with smooth chrome plate, one-side operated

**588376 (MAHDFAHDAO)**

Electric fry top with ribbed chrome plate, one-side operated

### Short Form Specification

**Item No.** \_\_\_\_\_

Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Chromium-plated mild steel cooking surface with non-stick finishing for optimal grilling. Powerblock heating system for optimal temperature distribution. Large drain hole allows draining of cooking juices into a large collector. Overheat protection switches off the supply in case of overheating. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. IPX5 water resistant certification. Configuration: Freestanding, one-side operated.

### Main Features

- Large drain hole on cooking surface permits the draining of residual cooking juices into a large collector placed under the cooking surface.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- Units have separate controls for each half module of the cooking surface.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal-covered knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Powerblock heating system for optimal temperature distribution.

### Construction

- Cooking surface to be completely smooth or completely ribbed.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- IPX5 water resistance certification.
- Cooking surface in chromium-plated mild steel with non-stick finishing for optimum grilling results.
- Internal frame for heavy duty sturdiness in stainless steel.

### Sustainability

- Standby function for energy saving and fast recovery of maximum power.

**APPROVAL:** \_\_\_\_\_

## Optional Accessories

|                                                                                                |            |                          |
|------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Connecting rail kit, 800mm                                                                   | PNC 912500 | <input type="checkbox"/> |
| • Stainless steel side panel (12mm), 800x800mm, freestanding                                   | PNC 912508 | <input type="checkbox"/> |
| • Portioning shelf, 800mm width                                                                | PNC 912526 | <input type="checkbox"/> |
| • Portioning shelf, 800mm width                                                                | PNC 912556 | <input type="checkbox"/> |
| • Folding shelf, 300x800mm                                                                     | PNC 912577 | <input type="checkbox"/> |
| • Folding shelf, 400x800mm                                                                     | PNC 912578 | <input type="checkbox"/> |
| • Fixed side shelf, 200x800mm                                                                  | PNC 912583 | <input type="checkbox"/> |
| • Fixed side shelf, 300x800mm                                                                  | PNC 912584 | <input type="checkbox"/> |
| • Fixed side shelf, 400x800mm                                                                  | PNC 912585 | <input type="checkbox"/> |
| • Stainless steel front kicking strip, 800mm width                                             | PNC 912598 | <input type="checkbox"/> |
| • Stainless steel side kicking strips left and right, freestanding, 800mm width                | PNC 912619 | <input type="checkbox"/> |
| • Stainless steel side kicking strips left and right, back-to-back, 1600mm width               | PNC 912625 | <input type="checkbox"/> |
| • Stainless steel plinth, freestanding, 800mm width                                            | PNC 912825 | <input type="checkbox"/> |
| • Connecting rail kit, right                                                                   | PNC 912971 | <input type="checkbox"/> |
| • Connecting rail kit, left                                                                    | PNC 912972 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, left                                                             | PNC 913109 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, right                                                            | PNC 913110 | <input type="checkbox"/> |
| • Endrail kit (12mm) for thermaline 80 units, left                                             | PNC 913200 | <input type="checkbox"/> |
| • Endrail kit (12mm) for thermaline 80 units, right                                            | PNC 913201 | <input type="checkbox"/> |
| • Stainless steel side panel, left, h=800                                                      | PNC 913216 | <input type="checkbox"/> |
| • Stainless steel side panel, right, h=800                                                     | PNC 913217 | <input type="checkbox"/> |
| • T-connection rail for back to back installations without backsplash                          | PNC 913227 | <input type="checkbox"/> |
| • INSERT.PROFILE,D800,TL-OTHER BRANDS                                                          | PNC 913230 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913234 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913246 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913249 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913250 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913253 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913254 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913257 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913273 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913274 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913281 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913665 | <input type="checkbox"/> |
| • STAINLESS STEEL DIVIDING PANEL 800X800MM LEFT/RIGHT                                          | PNC 913669 | <input type="checkbox"/> |
| • ELECTRIC MAINSWITCH 25A 4mm <sup>2</sup> NM FOR MODULAR H800 ELECTRIC UNITS (FACTORY FITTED) | PNC 913676 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                                           | PNC 913685 | <input type="checkbox"/> |

## Recommended Detergents

|                    |            |                          |
|--------------------|------------|--------------------------|
| • *NOT TRANSLATED* | PNC 0S2292 | <input type="checkbox"/> |
|--------------------|------------|--------------------------|

## Electric

|                                          |                      |
|------------------------------------------|----------------------|
| <input type="checkbox"/> Supply voltage: | 400 V/3N ph/50/60 Hz |
| <input type="checkbox"/> Total Watts:    | 15.3 kW              |


## Key Information:

|                                                              |                                   |
|--------------------------------------------------------------|-----------------------------------|
| <input type="checkbox"/> Cooking Surface Depth:              | 615 mm                            |
| <input type="checkbox"/> Cooking Surface Width:              | 700 mm                            |
| <input type="checkbox"/> Working Temperature MIN:            | 80 °C                             |
| <input type="checkbox"/> Working Temperature MAX:            | 280 °C                            |
| <input type="checkbox"/> External dimensions, Width:         | 800 mm                            |
| <input type="checkbox"/> External dimensions, Depth:         | 800 mm                            |
| <input type="checkbox"/> External dimensions, Height:        | 800 mm                            |
| <input type="checkbox"/> Storage Cavity Dimensions (width):  | 580 mm                            |
| <input type="checkbox"/> Storage Cavity Dimensions (height): | 330 mm                            |
| <input type="checkbox"/> Storage Cavity Dimensions (depth):  | 740 mm                            |
| <input type="checkbox"/> Net weight:                         | 150 kg                            |
| <input type="checkbox"/> Configuration:                      | On Base;One-Side Operated         |
| <input type="checkbox"/> Cooking surface type:               |                                   |
| <input type="checkbox"/> 588372 (MAHBFAHDAO)                 | Smooth                            |
| <input type="checkbox"/> 588376 (MAHDFAHDAO)                 | Ribbed                            |
| <input type="checkbox"/> Cooking surface - material:         | Chromium Plated mild steel mirror |


## Sustainability

|                                               |           |
|-----------------------------------------------|-----------|
| <input type="checkbox"/> Current consumption: | 22.1 Amps |
|-----------------------------------------------|-----------|

Front

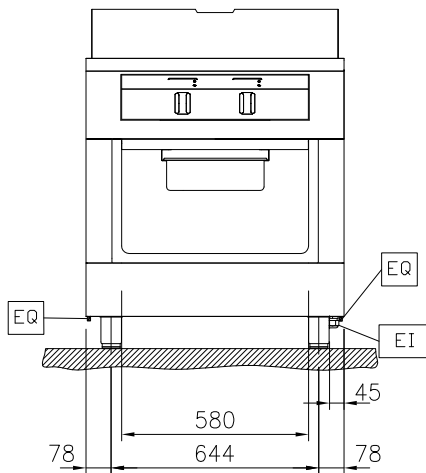


Side

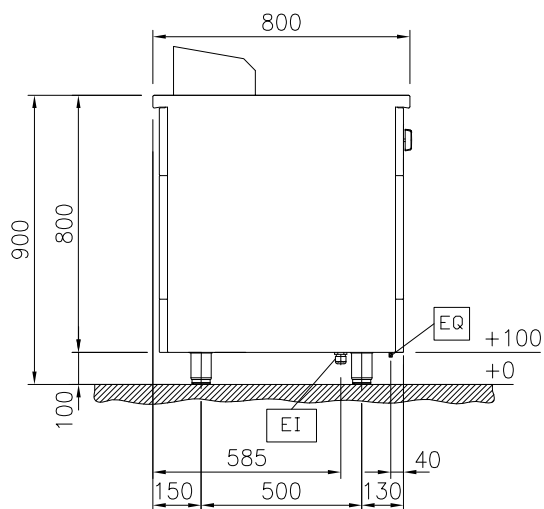


EI = Electrical inlet (power)  
 EQ = Equipotential screw


Top



Front

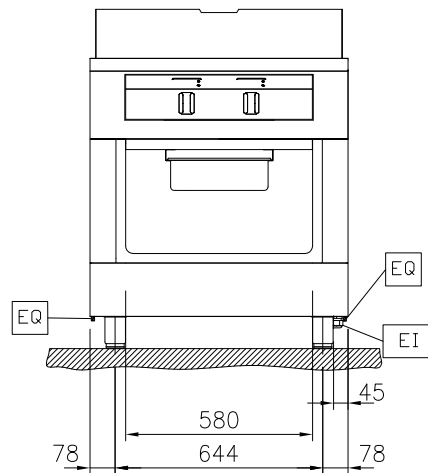

Side

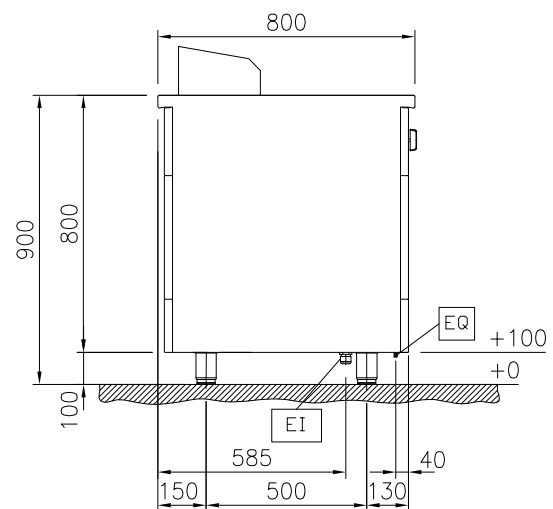

EI = Electrical inlet (power)  
 EQ = Equipotential screw

Top

