

Modular Cooking Range Line thermaline 80 - 500 mm Freestanding Electric Free-cooking Top, Smooth Plate, 1 Side, H=800

ITEM #
MODEL #
MODEL #
NAME #
SIS #
AIA#



588382 (MATDFAEDAO)

Electric free-cooking top, one-side operated

Short Form Specification

Item No.

Unit constructed according to DIN 18860 2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Smooth electrically-heated solid plate made of 14 mm thick steel with a wide rounded cleaning zone around the plate. Rapid plate heat up, continuously ready to use; maximum reachable surface temperature of 350°C. Overheat protection switches off the supply in case of overheating. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.

IPX5 water resistance certification.

Configuration: Freestanding, one-side operated.

Main Features

- For direct and indirect cooking.
- Rapid heat up of the plate and continuously ready for use.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Wide rounded cleaning zone around the plates for easier cleaning.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic silicon "soft" grip for easier handling and cleaning. The special design of the controls prevent infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Cooking plate and base joint profile guarantee against soil infiltration.
- Surface temperature up to 350°C

Construction

- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Cooking surface is an electrically heated solid plate made from 20mm thick stainless steel AISI 316 - DIN 1.4404.
- IPX5 water resistance certification.
- 2mm thick top in stainless steel AISI 304 DIN 1.4301.
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

	•			
•	Connecting rail kit, 800mm	PNC	912500	
•	Stainless steel side panel (12mm), 800x800mm, freestanding	PNC	912508	
•	Portioning shelf, 500mm width	PNC	912523	
•	Portioning shelf, 500mm width	PNC	912553	
•	Folding shelf, 300x800mm	PNC	912577	
•	Folding shelf, 400x800mm	PNC	912578	
•	Fixed side shelf, 200x800mm	PNC	912583	
•	Fixed side shelf, 300x800mm	PNC	912584	

APPROVAL:







• Fixed side shelf, 400x800mm	PNC 912585						
 Stainless steel front kicking strip, 500mm width 	PNC 912595						
 Stainless steel side kicking strips left and right, freestanding, 800mm width 	PNC 912619						
 Stainless steel side kicking strips left and right, back-to-back, 1600mm width 	PNC 912625						
Stainless steel plinth, freestanding, 500mm width	PNC 912822						
Connecting rail kit, right	PNC 912971						
Connecting rail kit, left	PNC 912972						
Endrail kit, flush-fitting, left	PNC 913109						
Endrail kit, flush-fitting, right	PNC 913110	$\overline{\Box}$					
Scraper for smooth plates	PNC 913119	$\overline{\Box}$					
Endrail kit (12mm) for thermaline 80 units, left	PNC 913200	ū					
• Endrail kit (12mm) for thermaline 80 units, right	PNC 913201						
• Stainless steel side panel, left, h=800	PNC 913216						
• Stainless steel side panel, right, h=800	PNC 913217						
T-connection rail for back to back installations without backsplash	PNC 913227						
• - NOTTRANSLATED -	PNC 913230						
• - NOTTRANSLATED -	PNC 913233						
• - NOTTRANSLATED -	PNC 913244						
• - NOTTRANSLATED -	PNC 913249						
• - NOTTRANSLATED -	PNC 913250						
• - NOTTRANSLATED -	PNC 913253						
• - NOTTRANSLATED -	PNC 913254						
• - NOTTRANSLATED -	PNC 913257						
• - NOTTRANSLATED -	PNC 913273						
• - NOTTRANSLATED -	PNC 913274						
• - NOTTRANSLATED -	PNC 913279						
• - NOTTRANSLATED -	PNC 913664						
• - NOTTRANSLATED -	PNC 913676						
Recommended Detergents							
• *NOTTRANSLATED*	PNC 0S2292						






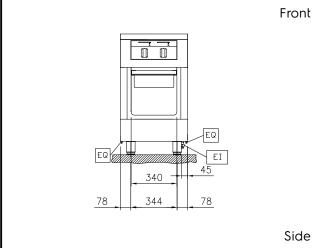



Electrical inlet (power) Equipotential screw

EQ

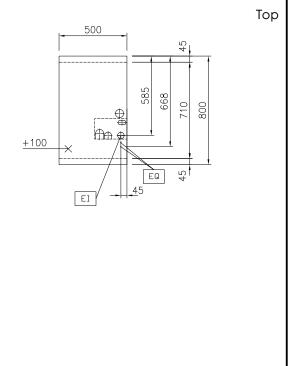

Electric

Supply voltage: 400 V/3N ph/50/60 Hz

Total Watts: 6 kW

Key Information:

80 °C Working Temperature MIN: Working Temperature MAX: 350 °C External dimensions, Width: 500 mm External dimensions, Depth: 800 mm External dimensions, Height: 800 mm Net weight: 100 kg

On Base;One-Side Operated

Configuration:

Sustainability

Current consumption: 13 Amps





Optional Accessories

Optional Accessories		
 Connecting rail kit, 800mm 	PNC 912500	
 Stainless steel side panel (12mm), 800x800mm, freestanding 	PNC 912508	
Portioning shelf, 500mm width	PNC 912523	
Portioning shelf, 500mm width	PNC 912553	
 Folding shelf, 300x800mm 	PNC 912577	
• Folding shelf, 400x800mm	PNC 912578	
• Fixed side shelf, 200x800mm	PNC 912583	
• Fixed side shelf, 300x800mm	PNC 912584	
• Fixed side shelf, 400x800mm	PNC 912585	
Stainless steel front kicking strip, 500mm width	PNC 912595	
• Stainless steel side kicking strips left and right, freestanding, 800mm width	PNC 912619	
 Stainless steel side kicking strips left and right, back-to-back, 1600mm width 	PNC 912625	
 Stainless steel plinth, freestanding, 500mm width 	PNC 912822	
 Connecting rail kit, right 	PNC 912971	
 Connecting rail kit, left 	PNC 912972	
 Endrail kit, flush-fitting, left 	PNC 913109	
 Endrail kit, flush-fitting, right 	PNC 913110	
 Scraper for smooth plates 	PNC 913119	
 Endrail kit (12mm) for thermaline 80 units, left 	PNC 913200	
 Endrail kit (12mm) for thermaline 80 units, right 	PNC 913201	
• Stainless steel side panel, left, h=800	PNC 913216	
 Stainless steel side panel, right, h=800 	PNC 913217	
 T-connection rail for back to back installations without backsplash 	PNC 913227	
- NOTTRANSLATED -	PNC 913230	
- NOTTRANSLATED -	PNC 913233	
- NOTTRANSLATED -	PNC 913244	
- NOTTRANSLATED -	PNC 913249	
- NOTTRANSLATED -	PNC 913250	
- NOTTRANSLATED -	PNC 913253	
- NOTTRANSLATED -	PNC 913254	
- NOTTRANSLATED -	PNC 913257	
- NOTTRANSLATED -	PNC 913273	
- NOTTRANSLATED -	PNC 913274	
• - NOTTRANSLATED -	PNC 913279	
- NOTTRANSLATED -	PNC 913664	
- NOTTRANSLATED -	PNC 913676	
Recommended Detergents		
• *NOTTRANSLATED*	PNC 0S2292	

