

Modular Cooking Range Line thermaline 80 - 800 mm Freestanding Electric Free-cooking Top, Smooth Plate, 1 Side, H=800

ITEM #		
MODEL #		
MODEL #		
NAME #		
SIS #		
AIA #		



588384 (MATFFAHDAO)

Electric free-cooking top, one-side operated

# **Short Form Specification**

### Item No.

Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Smooth electrically-heated solid plate made of 14 mm thick steel with a wide rounded cleaning zone around the plate. Rapid plate heat up, continuously ready to use; maximum reachable surface temperature of 350°C. Overheat protection switches off the supply in case of overheating. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.

IPX5 water resistance certification.

Configuration: Freestanding, one-side operated.

### Main Features

- For direct and indirect cooking.
- Rapid heat up of the plate and continuously ready for use.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Wide rounded cleaning zone around the plates for easier cleaning.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic silicon "soft" grip for easier handling and cleaning. The special design of the controls prevent infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Cooking plate and base joint profile guarantee against soil infiltration.
- Surface temperature up to 350°C


#### Construction


- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Cooking surface is an electrically heated solid plate made from 20mm thick stainless steel AISI 316 - DIN 1.4404.
- IPX5 water resistance certification.
- 2mm thick top in stainless steel AISI 304 DIN 1.4301.
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:






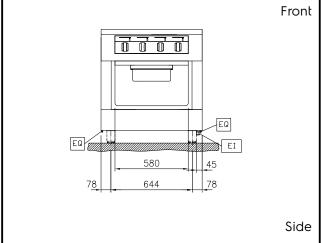



EI = Electrical inlet (power)
EQ = Equipotential screw

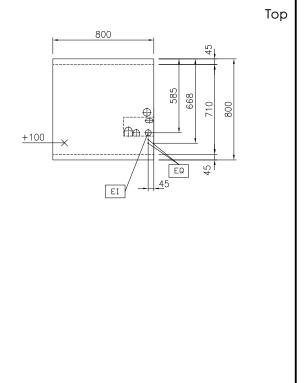

## Electric

Supply voltage: 400 V/3N ph/50/60 Hz

Total Watts: 12 kW

## **Key Information:**

Working Temperature MIN: 80 °C
Working Temperature MAX: 350 °C
External dimensions, Width: 800 mm
External dimensions, Depth: 800 mm
External dimensions, Height: 800 mm
Net weight: 145 kg

On Base;One-Side Operated

Sustainability

Current consumption: 26.1 Amps





## **Optional Accessories**

Optional Accessories		
<ul> <li>Connecting rail kit, 800mm</li> </ul>	PNC 912500	
<ul> <li>Stainless steel side panel (12mm), 800x800mm, freestanding</li> </ul>	PNC 912508	
<ul> <li>Portioning shelf, 800mm width</li> </ul>	PNC 912526	
<ul> <li>Portioning shelf, 800mm width</li> </ul>	PNC 912556	
• Folding shelf, 300x800mm	PNC 912577	
• Folding shelf, 400x800mm	PNC 912578	
• Fixed side shelf, 200x800mm	PNC 912583	
• Fixed side shelf, 300x800mm	PNC 912584	
• Fixed side shelf, 400x800mm	PNC 912585	
Stainless steel front kicking strip, 800mm width	PNC 912598	
Stainless steel side kicking strips left and right, freestanding, 800mm width	PNC 912619	
<ul> <li>Stainless steel side kicking strips left and right, back-to-back, 1600mm width</li> </ul>	PNC 912625	
<ul> <li>Stainless steel plinth, freestanding, 800mm width</li> </ul>	PNC 912825	
Connecting rail kit, right	PNC 912971	
Connecting rail kit, left	PNC 912972	
Endrail kit, flush-fitting, left	PNC 913109	
Endrail kit, flush-fitting, right	PNC 913110	
Scraper for smooth plates	PNC 913119	
Endrail kit (12mm) for thermaline 80 units, left	PNC 913200	
• Endrail kit (12mm) for thermaline 80 units, right	PNC 913201	
• Stainless steel side panel, left, h=800	PNC 913216	
• Stainless steel side panel, right, h=800	PNC 913217	
T-connection rail for back to back installations without backsplash	PNC 913227	
• - NOTTRANSLATED -	PNC 913230	
• - NOTTRANSLATED -	PNC 913234	
• - NOTTRANSLATED -	PNC 913247	
• - NOTTRANSLATED -	PNC 913249	
• - NOTTRANSLATED -	PNC 913250	
• - NOTTRANSLATED -	PNC 913253	
• - NOTTRANSLATED -	PNC 913254	
• - NOTTRANSLATED -	PNC 913257	
• - NOTTRANSLATED -	PNC 913273	
• - NOTTRANSLATED -	PNC 913274	
• - NOTTRANSLATED -	PNC 913281	ū
• - NOT TRANSLATED -	PNC 913665	
• - NOTTRANSLATED -	PNC 913677	
		_
Recommended Detergents		
<ul><li>*NOTTRANSLATED*</li></ul>	PNC 0S2292	

