Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 90 - 4-Burner Gas Top with Ecoflam, 1 Side

589082 (MCGHAAJOPI)	4-burner gas top, ecoflam, one-side operated	
Short Form Specification		
Item No.		
Unit constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. 4 gas burners with optimized combustion, flame failure device, thermocouple safety hand valve and protected pilot flame. Triple ring		

"flower" flame burners with anti-clogging design. Manual gas valves allow precise flame intensity control. Large pan support in cast iron with long center fins for various pan sizes. ECOFLAM pan detection system to save energy and to reduce unnecessary heat radiation in the kitchen. Deep flat spillage tray with rounded corners and drain hole. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.

IPX4 water resistant certification.

Configuration: One-side operated top. The base needs to be supplied by the factory. Please include appropriate base.

Main Feature	es
--------------	----

ITEM #

SIS #

AIA #

<u>MODEL #</u> NAME #

- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Large sized pan support in cast iron with long center fins to allow the use of the largest down to the smallest pans.
- Manual gas valves allow precise control of the flame intensity between high and low positions.
- Pans can easily be moved from one area to another without lifting.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic silicon "soft" grip for easier handling and cleaning. The special design of the controls prevent infiltration of liquids or soil into vital components.
- Burners with optimized combustion. Triple ring flower flame burners with anti-clogging design.
- Deep flat spillage tray with rounded corners and drain hole to facilitate cleaning.
- Patented Flower Flame burners that adjust to the size and form of the cookware (Patent EP2708813B1 and related family).

Construction

- Each burner equipped with thermocouple safety hand valve and protected pilot flame.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304).
- IPX4 water resistance certification.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.

Sustainability


• Model is supplied with Ecoflam pan detection system, which reduces energy consumption and unnecessary heat dispersion in the kitchen.

APPROVAL:

Excelence



Modular Cooking Range Line thermaline 90 - 4-Burner Gas Top with Ecoflam, 1 Side

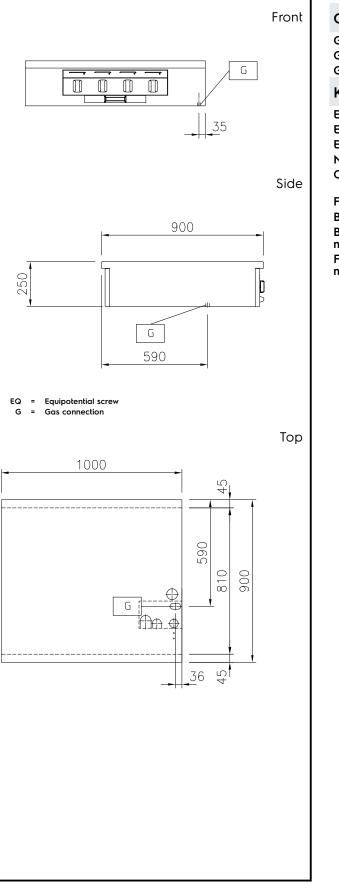

40 kW
1/2"
1000 mm 900 mm 250 mm 82 kg One-Side Operated;Top ISO 9001; ISO 14001 - ISO
9001; ISO 14001 kW
10 - 10 kW
Ø 70 Ø 70
Ø 70 Ø 70

Modular Cooking Range Line thermaline 90 - 4-Burner Gas Top with Ecoflam, 1 Side

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Optional Accessories

 Connecting rail kit, 900mm Portioning shelf, 1000mm width 	PNC 912528	
Portioning shelf, 1000mm widthFolding shelf, 300x900mm		
 Folding shelf, 400x900mm 		
• Fixed side shelf, 200x900mm		
• Fixed side shelf, 300x900mm	PNC 912590	ב
• Fixed side shelf, 400x900mm	PNC 912591	
 Connecting rail kit, right 	PNC 912975	
 Connecting rail kit, left 	PNC 912976	ב
 Endrail kit, flush-fitting, left 	PNC 913111	
 Endrail kit, flush-fitting, right 	PNC 913112	
• Endrail kit (12mm) for thermaline 90 units, left	PNC 913202	
• Endrail kit (12mm) for thermaline 90 units, right	PNC 913203	
• T-connection rail for back to back installations without backsplash	PNC 913227	ב
 - NOT TRANSLATED - 	PNC 913232	
 NOT TRANSLATED - 	PNC 913251	ב
 - NOT TRANSLATED - 	PNC 913252	
 - NOT TRANSLATED - 	PNC 913255	
 - NOT TRANSLATED - 	PNC 913256	
KIT LPG NOZZLES G30/31 FOR 4BURNER 10KW	PNC 913289	
 - NOT TRANSLATED - 	PNC 913698	ב

