



Electrolux
PROFESSIONAL

**Modular Cooking Range Line
thermaline 90 - 2 X 5 lt Wells
Freestanding Electric Pasta Cooker, 1
Side, H=800**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



589447 (MCKAFADDAO)

5+5lt electric pasta cooker,
one-side operated

Short Form Specification

Item No. _____

Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERM

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Constant water level refill.
- Automatic low-water level shut-off: no accidental over-heating.
- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- Easy to clean basin with rounded corners.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Safety systems protect against overtemperature and can be manually reset.
- Automatic water re-fill regulated by water level sensor at maximum volume.
- Water temperature controlled by electronic sensor and can be selected using 5 power levels.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Water basin in 1.4435 (AISI 316L) stainless steel is seamlessly welded into the top of the appliance.
- IPX5 water resistance certification.
- Internal frame for heavy duty sturdiness in stainless steel.

Sustainability




- Standby function for energy saving and fast recovery of maximum power.

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com

Front




Side

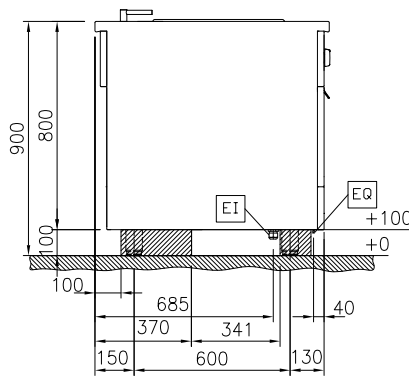

D = Drain
 EI = Electrical inlet (power)
 EQ = Equipotential screw
 WI = Water inlet

Top

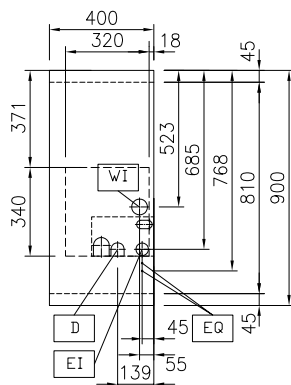

Electric

Supply voltage: 400 V/3N ph/50/60 Hz
 Total Watts: 5 kW

Water:

Incoming Cold/hot Water line size: 3/4"
 Drain line size: 1"

Key Information:

Number of wells: 2
 Usable well dimensions (width): 140 mm
 Usable well dimensions (height): 225 mm
 Usable well dimensions (depth): 345 mm
 Well capacity: 4 lt MIN; 5 lt MAX
 Thermostat Range: 40 °C MIN; 90 °C MAX
 External dimensions, Width: 400 mm
 External dimensions, Depth: 900 mm
 External dimensions, Height: 800 mm
 Net weight: 65 kg

Configuration: On Base; One-Side Operated

Sustainability

Current consumption: 7.2 Amps

Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Connecting rail kit, 900mm | PNC 912502 | ☐ |
| • Stainless steel side panel (12mm), 900x800mm, freestanding | PNC 912511 | ☐ |
| • Portioning shelf, 400mm width | PNC 912522 | ☐ |
| • Portioning shelf, 400mm width | PNC 912552 | ☐ |
| • Folding shelf, 300x900mm | PNC 912581 | ☐ |
| • Folding shelf, 400x900mm | PNC 912582 | ☐ |
| • Fixed side shelf, 200x900mm | PNC 912589 | ☐ |
| • Fixed side shelf, 300x900mm | PNC 912590 | ☐ |
| • Fixed side shelf, 400x900mm | PNC 912591 | ☐ |
| • Stainless steel front kicking strip, 400mm width | PNC 912594 | ☐ |
| • Stainless steel side kicking strips left and right, freestanding, 900mm width | PNC 912621 | ☐ |
| • Stainless steel side kicking strips left and right, back-to-back, 1800mm width | PNC 912627 | ☐ |
| • Stainless steel plinth, freestanding, 400mm width | PNC 912916 | ☐ |
| • Connecting rail kit, right | PNC 912975 | ☐ |
| • Connecting rail kit, left | PNC 912976 | ☐ |
| • 2 baskets for 2x5lt pasta cooker | PNC 913034 | ☐ |
| • Endrail kit, flush-fitting, left | PNC 913111 | ☐ |
| • Endrail kit, flush-fitting, right | PNC 913112 | ☐ |
| • Lid for 2x5lt pasta cooker | PNC 913150 | ☐ |
| • False bottom for 2x5lt pasta cooker basket | PNC 913158 | ☐ |
| • Endrail kit (12mm) for thermaline 90 units, left | PNC 913202 | ☐ |
| • Endrail kit (12mm) for thermaline 90 units, right | PNC 913203 | ☐ |
| • Stainless steel side panel, left, H=800, flush | PNC 913224 | ☐ |
| • Stainless steel side panel, left, H=800, flush | PNC 913225 | ☐ |
| • T-connection rail for back to back installations without backsplash | PNC 913227 | ☐ |
| • - NOT TRANSLATED - | PNC 913232 | ☐ |
| • - NOT TRANSLATED - | PNC 913244 | ☐ |
| • - NOT TRANSLATED - | PNC 913251 | ☐ |
| • - NOT TRANSLATED - | PNC 913252 | ☐ |
| • - NOT TRANSLATED - | PNC 913255 | ☐ |
| • - NOT TRANSLATED - | PNC 913256 | ☐ |
| • - NOT TRANSLATED - | PNC 913259 | ☐ |
| • - NOT TRANSLATED - | PNC 913277 | ☐ |
| • - NOT TRANSLATED - | PNC 913278 | ☐ |
| • - NOT TRANSLATED - | PNC 913663 | ☐ |
| • - NOT TRANSLATED - | PNC 913673 | ☐ |
| • - NOT TRANSLATED - | PNC 913676 | ☐ |
| • - NOT TRANSLATED - | PNC 913689 | ☐ |