

**Modular Cooking Range Line**  
**thermaline 90 - 600mm Passthrough**  
**Warming Cabinet, 2 doors, GN conform,**  
**2 Sides(H2)-H=550**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**589492 (MC4JDCFOAO)**

Passthrough electric  
warming cabinet, with 2  
doors, two-side operated,  
GN - H2

### Short Form Specification

**Item No.** \_\_\_\_\_

600 mm wide passthrough warming cabinet with 2 doors, constructed according to DIN 18860\_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction

### Main Features


- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.
- Temperature in the cupboard can be set through a thermostat to suit different requirements. The maximum temperature is 110°C.
- [NOT TRANSLATED]

### Construction


- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

**APPROVAL:** \_\_\_\_\_

Front




Side

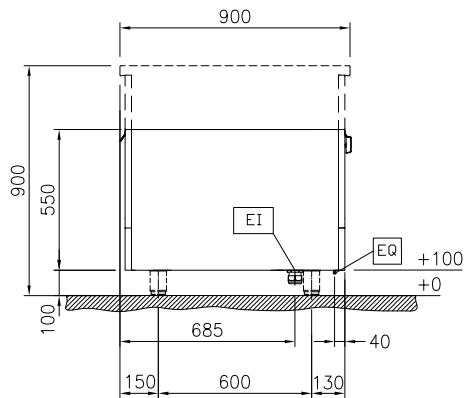

EI = Electrical inlet (power)

Top

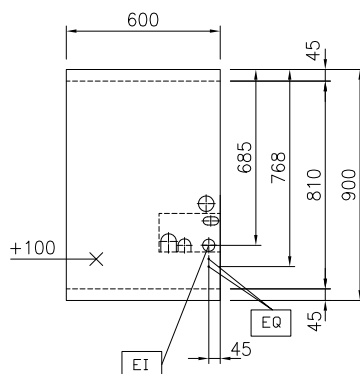

### Key Information:

External dimensions, Width:	
589492 (MC4JDCFOAO)	600 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	550 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	810 mm
Cabinet temperature range:	30-110 °C
Net weight:	30 kg

### Sustainability

Current consumption:	2.5 Amps
----------------------	----------



**Electrolux**  
PROFESSIONAL

Modular Cooking Range Line  
thermaline 90 - 600mm Passthrough Warming  
Cabinet, 2 doors, GN conform, 2 Sides(H2)-  
H=550

## Optional Accessories

- Stainless steel side panel (12mm), 900x800mm, freestanding PNC 912511 ☐
- Stainless steel front kicking strip, 600mm width PNC 912596 ☐
- Stainless steel side kicking strips left and right, freestanding, 900mm width PNC 912621 ☐
- Stainless steel plinth, freestanding, 600mm width PNC 912918 ☐
- - NOT TRANSLATED - PNC 913236 ☐
- - NOT TRANSLATED - PNC 913244 ☐
- - NOT TRANSLATED - PNC 913259 ☐
- - NOT TRANSLATED - PNC 913280 ☐
- - NOT TRANSLATED - PNC 913673 ☐
- - NOT TRANSLATED - PNC 913676 ☐
- - NOT TRANSLATED - PNC 913689 ☐



Modular Cooking Range Line  
thermaline 90 - 600mm Passthrough Warming Cabinet, 2 doors, GN  
conform, 2 Sides(H2)-H=550  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.04.18