

EMPower Gas Charbroiler Top - 24"

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



169120 (AGG24)

EMPower Restaurant Range charbroiler, 24" wide, gas, 66,000 BTU, cast iron radiants with 4" adjustable, removable legs

Short Form Specification

Item No. _____

EMPower unit to be Electrolux Gas Charbroiler Top with two high efficiency 33,000 BTU (9,6 kW) burners. Control knobs provide smooth, continuous rotation from min to max. Suitable for natural gas or propane gas. Heavy duty, double-sided, removable cast iron radiants to provide attractive char-broil markings and unmistakable char-broiled taste. 6" (153 mm) radiant sections may be removed easily and safely for cleaning. Special system utilizing stainless steel deflective shields below the radiants (PATENT PENDING) prevents clogging of burners, minimizes flare ups and provides even heat distribution. Two full length, half gal. (2 l) grease collector drawers with hole to indicate when full, capture all excess grease and oil and can be extracted for easy dumping and cleaning. Grease collector drawers may be filled with water to facilitate cleaning. Full width, removable grease gutter on front. No tools are needed to remove grates, radiant covers, stainless steel burners, splashback and grease gutter. All major components can be accessed from the top and front of the appliance for ease of maintenance. Worktop in AISI 304 Stainless Steel. Front and side panels in Stainless Steel with Scotch Brite finish. removable

splashback may be easily disassembled for cleaning. Special heavy duty chrome plated knobs for durability and easy cleaning. The configuration of bezels and knobs provides high level of protection against water infiltrations. Right-angled side edges to allow flush fitting joints between EMPower units. Supplied with 4" (102mm) height adjustable, removable legs. EMPower unit may be installed on refrigerated base or open cupboard.

APPROVAL: _____

Main Features

- Two high efficiency gas 33,000 BTU (9,6 kW) burners.
- Burners with optimized combustion and protected pilot light.
- Flame failure device to protect against accidental extinguishing of the flame.
- Control knobs provide smooth, continuous rotation.
- 6" (153 mm) radiant sections may be removed easily and safely for cleaning.
- Special system utilizing stainless steel deflective shields below the radiants (PATENT PENDING) prevents clogging of burners, minimizes flare ups and provides even heat distribution.
- Two full length, half gal. (2 l) grease collector drawers with hole to indicate when full, captures all excess grease and oil and can be extracted for easy dumping and cleaning.
- Grease collector drawers may be filled with water to facilitate cleaning.
- Full width, removable grease gutter on front.
- No tools are needed to remove grates, radiant covers, stainless steel burner, splashback and grease gutter.
- Removable splashback may be easily disassembled for cleaning.
- All major components can be accessed from the top and front of the appliance for ease of maintenance.
- Front and side panels in Stainless Steel with Scotch Brite finish.
- Special heavy duty chrome plated knobs for durability and easy cleaning.
- The configuration of bezels and knobs provides high level of protection against water infiltrations.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Provided with kit for side-by-side connection between units for minimizing gaps and possible dirt traps.
- Supplied with 4" (102mm) height adjustable, removable legs.
- Unit may be installed on refrigerated base by removing the legs and inserting the special pins (optional accessory).
- Unit may be installed on open cupboard by removing the legs and inserting the screws provided as standard with the open cupboards.
- Included Accessories: propane converter kit, pressure regulator and main shut off valve.
- In compliance with ETL Certification (UL & NSF).
- Configured for Natural Gas, LP Conversion Kit Included.
- [NOT TRANSLATED]

- EMPower portioning shelf 16" PNC 169174
- EMPower portioning shelf 24" PNC 169175


Construction

- Worktop in 304 AISI stainless steel.
- 4 screws to install on the cupboard base are supplied with the unit.
- Gas pressure regulator is supplied with the unit.


Optional Accessories

- EMPower - 4 pins to fix top to refrigerated base PNC 169048
- EMPower scraper & hooks for charbroiler PNC 169082
- EMPower back mounted rear shelf-spacer, 24" unit PNC 169098
- EMPower portioning shelf 12" PNC 169173

Front

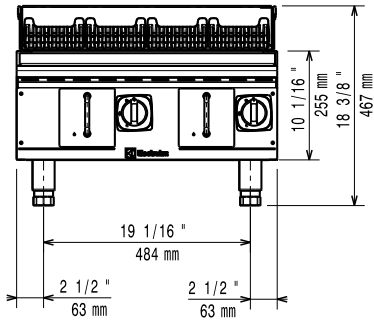

Side



- EQ = Equipotential screw
- G = Gas connection

Top

IN L.S. DRAWN
ELECTROLUX
it may not
and it is
PROFESSION.

SUPERFICI IN VISTA
VISIBLE SURFACES

ROHS
2002/95/EC

RE

m	K	

Gas**Gas Power:**

169120 (AGG24) 66000 Btu/hr (19.3 kW)

Gas Inlet:

1/2"

Key Information:**External dimensions, Width:** 24 1/32" (610 mm)**External dimensions, Depth:** 31 1/2" (800 mm)**External dimensions, Height:** 18 3/8" (467 mm)**Net weight:** 192 lbs (87 kg)**Shipping width:** 26 3/8" (670 mm)**Shipping depth:** 36 1/4" (920 mm)**Shipping height:** 25 3/16" (640 mm)**Shipping weight:** 229 lbs (104 kg)**Shipping volume:** 13.93 ft³ (0.39 m³)

*The rear and side clearances shown on the diagram indicate the minimum distances recommended from the appliance to combustible surfaces.