

EMPower 2 Open Gas Burner Top with Safety Thermocouple

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



169130 (ACG12T) EMPower Two (2) Burner Top, Gas, Thermoc

Short Form Specification

Item No. _____

EMPower unit to be Electrolux Two (2) Open Gas Burner Top. Individually controlled high efficiency 32,500 BTU (9.5 kW) Flower Flame burners. Control knobs provide smooth, continuous rotation from min to max. Suitable for natural gas or propane gas. Cast iron pan supports 12" x 12" (305 mm x 305 mm). Full width crumb tray below the burners. All major components can be accessed from the top and front of the appliance for ease of maintenance. Worktop in AISI 304 Stainless Steel. Front and side panels in Stainless Steel with Scotch Brite finish. Special heavy duty chrome plated knobs for durability and easy cleaning. The configuration of bezels and knobs provides high level of protection against water infiltrations. Right-angled side edges to allow flush fitting between EMPower units. Supplied with 4" (102 mm) height adjustable, removable legs. EMPower unit may be installed on refrigerated base or open cupboard.


Main Features

- Two (2) individually controlled high efficiency 9.5 kW Flower Flame gas burners.
- Control knobs provide smooth, continuous rotation.
- No gaskets and removable one-piece venturis and burners for easy cleaning.
- The geometrics of the venturis and cast iron burners provides the maximum level of heating efficiency.
- The cast iron burners are anti-clogging.
- The 12"x12" (305mm x 305mm) cast iron pan supports allow for small pots and pans to be placed over the flame thanks to the special configuration.
- The cast iron pan supports allow to slide pots and pans from section to section as well as to protect the pilot from spilled food and debris.
- Full width crumb tray below the burners captures all overflow and debris and can be easily extracted for dumping and cleaning.
- All major components can be accessed from the top and front of the appliance for ease of maintenance.
- Front and side panels in Stainless Steel with Scotch Brite finish.
- Special heavy duty chrome plated knobs for durability and easy cleaning.
- The configuration of bezels and knobs provides high level of protection against water infiltrations.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Provided with kit for side-by-side connection between units for minimizing gaps and possible dirt traps.
- Supplied with 4" (102mm) height adjustable, removable legs.
- Unit may be installed on refrigerated base by removing the legs and inserting the special pins (optional accessory).
- Unit may be installed on open cupboard by removing the legs and inserting the screws provided as standard with the open cupboards.
- Included Accessories: propane converter kit, pressure regulator and main shut off valve.
- In compliance with ETL Certification (UL & NSF).
- [NOT TRANSLATED]
- Configured for Natural Gas, LP Conversion Kit Included.

Optional Accessories

- | | | |
|--|------------|--------------------------|
| • EMPower - 4 pins to fix top to refrigerated base | PNC 169048 | <input type="checkbox"/> |
| • EMPower back mounted rear shelf-spacer, 12" unit | PNC 169096 | <input type="checkbox"/> |
| • EMPower portioning shelf 12" | PNC 169173 | <input type="checkbox"/> |

APPROVAL: _____

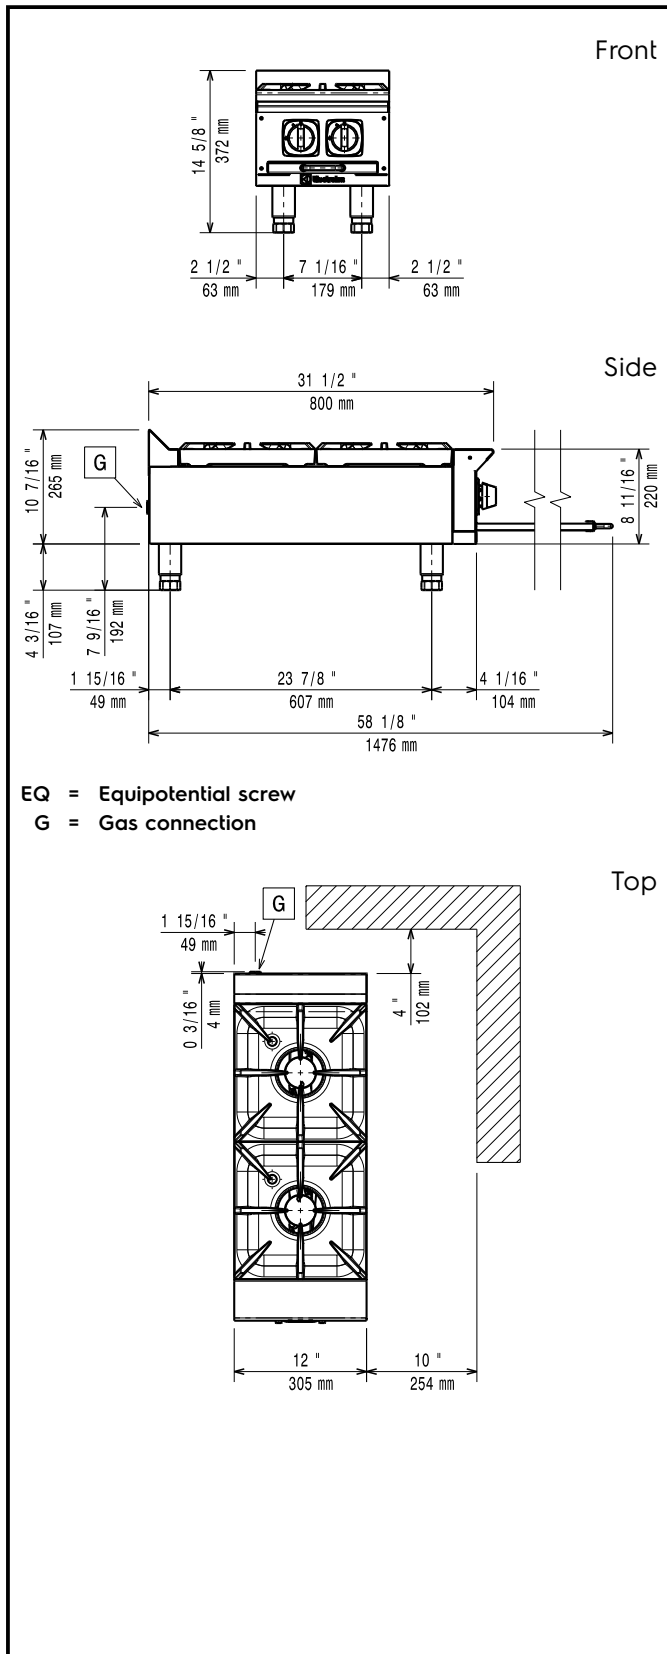

Gas

Gas Power:

169130 (ACGI2T) 65000 Btu/hr (19 kW)

Standard gas delivery:

Natural Gas

Gas Type Option:

Propane

Gas Inlet:

1/2"

Key Information:

Front Burners Power: 9.5 - 0 kW (32385.5 - Btu/hr)

Middle Burners Power: 0 - 0/0 - 0 kW (- / - Btu/hr)

Front Plates Power: 9.5 - 0 kW (32385.5 - Btu/hr)

Back Plates Power: 9.5 - 0 kW (32385.5 - Btu/hr)

External dimensions, Width: 12 1/64" (305 mm)

External dimensions, Depth: 31 1/2" (800 mm)

External dimensions, Height: 14 5/8" (372 mm)

Net weight: 66 lbs (30 kg)

Shipping width: 35 7/16" (900 mm)

Shipping depth: 14 3/16" (360 mm)

Shipping height: 25 9/16" (650 mm)

Shipping weight: 101 lbs (46 kg)

Shipping volume: 7.44 ft³ (0.21 m³)

*The rear and side clearances shown on the diagram indicate the minimum distances recommended from the appliance to combustible surfaces.