



**Electrolux**  
PROFESSIONAL

## SkyLine ProS Electric Boilerless Combi Oven 102 208V

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

**Electrolux**  
PROFESSIONAL

**SkyLine ProS**  
Electric Boilerless Combi Oven 102 208V



219653 (ECOE102K3L0)

SKYLINE ProS OVEN 10  
FULL SHEET PANS (18" X  
26") TOUCH-ELECTRIC  
208V -BOILERLESS

### Short Form Specification

#### Item No. \_\_\_\_\_

Combi oven with high resolution full touch screen interface, multilanguage, IPX5, ETL, EnergyStar, Ergocert

- BOILERLESS
- OptiFlow: air distribution system with 7 fan speed levels
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator.
- 2 Cooking modes: Programs, Manual
- Special functions: MultiTimer cooking, Plan-n-Save, SkyHub homepage, agenda MyPlanner, automatic backup mode to avoid downtime
- USB port to download HACCP data, programs and settings. Connectivity to the cloud ready
- 6-point multi sensor core temperature probe
- Triple-glass door with double LED lights line
- Includes (5) 922076 stainless steel grids

### Main Features

- Touchscreen: High resolution interface (translated into more than 30 languages including Spanish and French) - color-blind friendly panel.
- Instant steam generator: Boilerless steaming function to add and retain moisture for high quality, consistent cooking results. Automatic moistener (11 settings)
- Dry, hot convection cycle (77 °F - 575 °F/25°C - 300 °C): ideal for convection cooking.
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- MultiTimer: Special feature to manage up to 20 different cooking cycles at the same time in the same cavity guaranteeing even cooking results. Up to 200 MultiTimer available programs
- Reversible Fan: 7 speed fan levels from 300 to 1500 RPM with reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Picture Management: upload full customized images of cooking cycles or food items
- Automatic cool-down and pre-heat function
- Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).
- Make-it-mine: feature to allow full personalization or locking of the user interface by selecting what is visible on screen
- SkyHub: customizable homepage to allow the user to group their favorite functions for immediate access when operating.
- MyPlanner: on-screen agenda where the user can plan their daily work, set reminders for several users and receive personalized alerts for each activity
- GreaseOut: predisposed for integrated grease drain and collection for safer operations (dedicated base as optional accessory).
- USB port: to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity: ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- e-learning: equipment trainings, how-to guides, and technical documentation easily accessible by scanning QR-Code with any mobile device.
- Back-up mode: self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Data Analytics: automatic consumption visualization at the end of the cycle.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- Capacity: 10 full sheet pans or 20 half sheet/hotel pans.
- OptiFlow air distribution system to achieve maximum

APPROVAL: \_\_\_\_\_

performance in chilling/heating evenness and temperature control thanks to a special design of the chamber.

### Construction

- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with 6 tray rack for full size pans, 2 2/3" pitch.
- Triple thermo-glazed door: with 2 hinged inside panels for easy cleaning and double LED lights line.

### Sustainability



- Human centered design: with 4-star certification for ergonomics and usability.
- Door handle: ergonomic wing-shaped design for hands-free door opening with elbow, to allow simple trays management (Registered Design at EPO).
- Reduced-Power Feature: To consume less energy during customized slow cooking cycles.
- SkyClean: Automatic self cleaning system with integrated descaling of the steam boiler. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- Plan-n-Save: the oven organizes the sequence of the chosen cooking cycles to optimize the processes in the kitchen reducing time and energy consumption.

### Included Accessories

- 5 of Aisi 304 stainless steel grid (18" x 26") PNC 922076

### Optional Accessories

- |   |            |                          |
|---|------------|--------------------------|
| • Caster kit for base for 61, 62, 101 and 102 oven bases only           | PNC 922003 | <input type="checkbox"/> |
| • Pair of half size oven racks, type 304 stainless steel                | PNC 922017 | <input type="checkbox"/> |
| • Chicken racks, pair (2) (fits 8 chickens per rack)                    | PNC 922036 | <input type="checkbox"/> |
| • Single 304 stainless steel grid (12" x 20")                           | PNC 922062 | <input type="checkbox"/> |
| • Aisi 304 stainless steel grid (18" x 26")                             | PNC 922076 | <input type="checkbox"/> |
| • External side spray unit  | PNC 922171 | <input type="checkbox"/> |
| • Pair of 304 stainless steel full-size grids (18" x 26")               | PNC 922175 | <input type="checkbox"/> |
| • Baguette tray, made of perforated aluminum, silicon coated, 16" x 24" | PNC 922189 | <input type="checkbox"/> |
| • Perforated baking tray, made of perforated aluminum, 16" x 24"        | PNC 922190 | <input type="checkbox"/> |
| • Baking tray, made of aluminum 16" x 24"                               | PNC 922191 | <input type="checkbox"/> |
| • Pair of frying baskets  | PNC 922239 | <input type="checkbox"/> |
| • Pastry grid 16" x 24"   | PNC 922264 | <input type="checkbox"/> |
| • Double-click closing catch for oven door                              | PNC 922265 | <input type="checkbox"/> |
| • Grid for whole chicken 1/1GN (8 per grid - 2.6 lbs each)              | PNC 922266 | <input type="checkbox"/> |
| • USB Probe for sous-vide cooking (only for Touchline ovens)            | PNC 922281 | <input type="checkbox"/> |
| • Kit universal skewer rack & (6) long skewer ovens (TANDOOR)           | PNC 922325 | <input type="checkbox"/> |

- |  |            |                          |
|--|------------|--------------------------|
| • Universal skewer pan for ovens (TANDOOR)   | PNC 922326 | <input type="checkbox"/> |
| • Skewers for ovens, (6) 14" short (TANDOOR)   | PNC 922328 | <input type="checkbox"/> |
| • Multipurpose hook  | PNC 922348 | <input type="checkbox"/> |
| • 4 FLANGED FEET FOR 61,62,101,102 OVENS - 2" 100-130MM  | PNC 922351 | <input type="checkbox"/> |
| • Grease collection tray (2 2/5") for 62 and 102 ovens   | PNC 922357 | <input type="checkbox"/> |
| • Grid for 8 whole ducks (1.8KG, 4LBS) - GN 1/1  | PNC 922362 | <input type="checkbox"/> |
| • Thermal blanket for 102 oven (trolley not included)  | PNC 922366 | <input type="checkbox"/> |
| • HOLDER FOR DETERGENT TANK - WALL MOUNTED   | PNC 922386 | <input type="checkbox"/> |
| • USB SINGLE POINT PROBE   | PNC 922390 | <input type="checkbox"/> |
| • 10 Tray Rack with wheels, Full Sheet Pans, 2 1/2" (65mm) pitch for 102 ovens and blast chillers                    | PNC 922603 | <input type="checkbox"/> |
| • 8 Tray Rack with wheels, Full Size Sheet Pans, 3" (80mm) pitch for 102 ovens and blast chillers                    | PNC 922604 | <input type="checkbox"/> |
| • Slide-in rack with handle for 62, and 102 combi oven   | PNC 922605 | <input type="checkbox"/> |
| • Bakery/pastry tray rack with wheels 400x600mm for 10 GN 2/1 oven and blast chiller freezer, 80mm pitch (8 runners) | PNC 922609 | <input type="checkbox"/> |
| • Open base with tray support for 62 & 102 combi oven  | PNC 922613 | <input type="checkbox"/> |
| • External connection kit for detergent and rinse aid  | PNC 922618 | <input type="checkbox"/> |
| • Stacking kit for electric 62 combi oven placed on 62 electric combi oven or 102 combi oven                         | PNC 922621 | <input type="checkbox"/> |
| • Trolley for slide-in rack for 62 & 102 ovens and 102 blast chiller.  | PNC 922627 | <input type="checkbox"/> |
| • Trolley for mobile rack for 62 on 62 or 102 combi ovens  | PNC 922631 | <input type="checkbox"/> |
| • Stainless steel drain kit for all oven sizes (61, 62, 101,102, 201,202)-dia=50mm (2")                              | PNC 922636 | <input type="checkbox"/> |
| • Plastic drain kit for all oven sizes (61, 62, 101,102,201, 202), dia=50mm (2")                                     | PNC 922637 | <input type="checkbox"/> |
| • Trolley with 2 tanks for grease collection   | PNC 922638 | <input type="checkbox"/> |
| • Grease collection kit for open base (2 tanks, open/close device and drain)   | PNC 922639 | <input type="checkbox"/> |
| • Banquet rack with wheels holding 51 plates for 102 oven and blast chiller freezer, 75mm pitch ( 3" 1/3")           | PNC 922650 | <input type="checkbox"/> |
| • Dehydration tray, (12" x 20"), H=2/3"  | PNC 922651 | <input type="checkbox"/> |
| • Flat dehydration tray, (12" x 20")   | PNC 922652 | <input type="checkbox"/> |
| • Heat shield for 102 combi oven   | PNC 922664 | <input type="checkbox"/> |
| • Heat shield for stacked ovens 62 on 102 combi ovens  | PNC 922667 | <input type="checkbox"/> |
| • Kit to fix oven to the wall  | PNC 922687 | <input type="checkbox"/> |
| • Tray support for 62 & 102 oven base  | PNC 922692 | <input type="checkbox"/> |
| • 4 adjustable feet with black cover for 61,62 & 101,102 combi ovens, 150-200mm (5 9/10in -7 9/1in)                  | PNC 922693 | <input type="checkbox"/> |
| • Detergent tank holder for open base  | PNC 922699 | <input type="checkbox"/> |
| • Wheels for stacked ovens   | PNC 922704 | <input type="checkbox"/> |
| • Mesh grilling grid (12" x 20")   | PNC 922713 | <input type="checkbox"/> |



**Electrolux**  
PROFESSIONAL

**SkyLine ProS**  
**Electric Boilerless Combi Oven 102**  
**208V**


- Probe holder for liquids PNC 922714 ☐
- 4 high adjustable feet for 61,62 & 101,102 combi ovens, 230-290mm (9in - 11 2/5in) PNC 922745 ☐
- Tray for traditional static cooking, H=100mm (12" x 20") PNC 922746 ☐
- Double-face griddle, one side ribbed and one side smooth, 400x600mm PNC 922747 ☐
- TROLLEY FOR GREASE COLLECTION KIT PNC 922752 ☐
- WATER INLET PRESSURE REDUCER PNC 922773 ☐
- KIT FOR INSTALLATION OF ELECTRIC POWER PEAK MANAGEMENT SYSTEM-6-10 GN OVENS PNC 922774 ☐
- Extension for condensation tube, 37cm PNC 922776 ☐
- Non-stick universal pan (12" x 20" x 3/4") PNC 925000 ☐
- Non-stick universal pan (12" x 20" x 1 1/2") PNC 925001 ☐
- Non-stick universal pan (12" x 20" x 2 1/2") PNC 925002 ☐
- Frying griddle double sided (ribbed/smooth) 12" x 20" PNC 925003 ☐
- Aluminum combi oven grill (12" x 20") PNC 925004 ☐
- Egg fryer for 8 eggs (12" X 20") PNC 925005 ☐
- Flat baking tray with 2 edges (12" x 20") PNC 925006 ☐
- Potato baker GN 1/1 for 28 potatoes (12"X20") PNC 925008 ☐
- Compatibility kit for installation on previous base 62,102 PNC 930218 ☐




**Electrolux**  
PROFESSIONAL

## SkyLine ProS Electric Boilerless Combi Oven 102 208V

Front

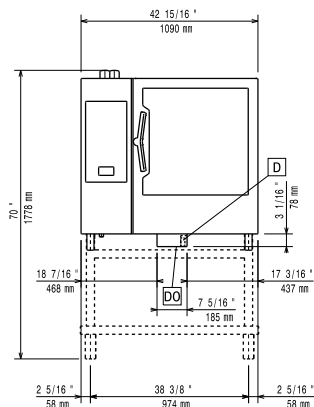

Side

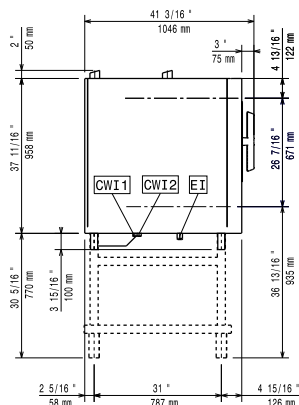


CWI1 = Cold Water inlet      EI = Electrical connection

CWI2 = Cold Water Inlet 2

D = Drain

DO = Overflow drain pipe

Top

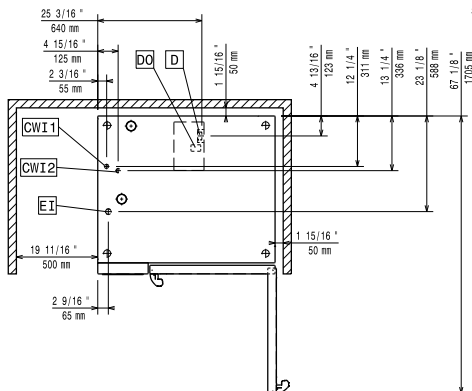

### Electric

#### Supply voltage:

219653 (ECO E102K3L0) 208 V/3 ph/60 Hz

#### Electrical power, default:

35.4 kW

#### Electrical power, max:

35.4 kW

### Water:

#### Water Cold Supply

Connection: 3/4"

Cold Water Inlet Connection: 3/4" GHT

Pressure: 15-87 psi (1-6 bar)

Drain "D": 2" (50 mm)

Max inlet water supply temperature: 86°F (30°C)

Chlorides: <10 ppm

Conductivity: >50 µS/cm

Water inlet cold 1: unfiltered

Water inlet cold 2: filtered

**Electrolux Professional** recommends the use of treated water, based on testing of specific water conditions. Refer to manual for details

### Installation:

#### Clearance:

Clearance: 2 in (5 cm) rear and right hand sides.

#### Suggested clearance for service access:

20 in (50 cm) left hand side.

### Capacity:

Max load capacity: 220 lbs (100 kg)

Full-size sheet pans: 10 - 18" X 26"

### Key Information:

#### Door hinges:

External dimensions, Width: 42 15/16" (1090 mm)

External dimensions, Depth: 38 1/4" (971 mm)

External dimensions, Height: 41 5/8" (1058 mm)

Net weight: 389 lbs (176.5 kg)

Shipping width: 44 1/2" (1130 mm)

Shipping depth: 43 5/16" (1100 mm)

Shipping height: 50 3/8" (1280 mm)

Shipping weight: 444 lbs (201.5 kg)

Shipping volume: 56.18 ft<sup>3</sup> (1.59 m<sup>3</sup>)

### ISO Certificates

#### ISO Standards:

ISO 9001; ISO 14001; ISO 45001; ISO 50001

### Sustainability

#### Current consumption:

97.6 Amps



SkyLine ProS  
Electric Boilerless Combi Oven 102 208V

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.04.22