

SkyLine ProS Natural Gas Boilerless Combi Oven 202 120V

| <image/> <image/> <text><text></text></text>  |  |  |  |  |  |
|---|--|--|--|--|--|
| Short Form Specification  |  |  |  |  |  |
| Item No.  |  |  |  |  |  |
| Item No.         Combi oven with high resolution full touch screen interface, multilanguage, IPX5, ETL, EnergyStar, Ergocert         BOILERLESS         OptiFlow: air distribution system with 7 fan speed levels         SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator.         2 Cooking modes: Programs, Manual         Special functions: MultiTimer cooking, Plan-n-Save, SkyHub homepage, agenda MyPlanner, automatic backup mode to avoid downtime         USB port to download HACCP data, programs and settings. Connectivity to the cloud ready         - 6-point multi sensor core temperature probe         Triple-glass door with double LED lights line         - Includes (10) 922076 stainless steel grids         - Includes (1) 922757 trolley |  |  |  |  |  |
|   |  |  |  |  |  |

| Μ | ain         | Fea | tures |
|---|-------------|-----|-------|
|   | <b>MIII</b> |     |       |

- Instant steam generator: Boilerless steaming function to add and retain moisture for high quality, consistent cooking results. Automatic moistener (11 settings)
- Dry, hot convection cycle (77 °F 575 °F/25°C 300 °C): ideal for convection cooking.
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- MultiTimer: Special feature to manage up to 20 different cooking cycles at the same time in the same cavity guaranteeing even cooking results. Up to 200 MultiTimer available programs
- Reversible Fan: 7 speed fan levels from 300 to 1500 RPM with reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Automatic cool-down and pre-heat function
- Different chemical options available: solid (phosphatefree), liquid (requires optional accessory).
- GreaseOut: predisposed for integrated grease drain and collection for safer operations (dedicated base as optional accessory).
- Back-up mode: self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- Capacity: 20 full sheet pans or 40 half sheet/hotel pans.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness and temperature control thanks to a special design of the chamber.

## Construction

- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Integrated door shield to avoid steam and heat dispersion from the door, when the roll-in rack is not used.
- Supplied with one full-size sheet trolley, 2 1/2" pitch.
- Triple thermo-glazed door: with 2 hinged inside panels for easy cleaning and double LED lights line.

## User Interface & Data Management

- Touchscreen: High resolution interface (translated into more than 30 languages including Spanish and French)
   color-blind friendly panel.
- Picture Management: upload full customized images of cooking cycles or food items
- Make-it-mine: feature to allow full personalization or locking of the user interface by selecting what is visible

SkyLine ProS Natural Gas Boilerless Combi Oven 202 120V

MODEL # NAME # SIS #



ITEM #

#### APPROVAL:

Electrolux PROFESSIONAL

## SkyLine ProS Natural Gas Boilerless Combi Oven 202 120V

PNC 922326

Universal skewer pan for ovens

(TANDOOR)

on screen

- SkyHub:customizable homepageto allow the user to group their favorite functions for immediate access when operating.
- MyPlanner: on-screen agenda where the user can plan their daily work, set reminders for several users and receive personalized alerts for each activity
- USB port: to download HACCP data, share cooking programs and configurations. USB port also allows to plugin sous-vide probe (optional accessory).
- Connectivity: ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- e-learning: equipment trainings, how-to guides, and technical documentation easily accessible by scanning QR-Code with any mobile device.
- Data Analytics: automatic consumption visualization at the end of the cycle.

### **Sustainability**



- Human centered design: with 4-star certification for ergonomics and usability.
- Door handle: ergonomic wing-shaped design for handsfree door opening with elbow, to allow simple trays management (Registered Design at EPO).
- Reduced-Power Feature: To consume less energy during customized slow cooking cycles.
- SkyClean: Automatic self cleaning system with integrated descaling of the steam boiler. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- Plan-n-Save: the oven organizes the sequence of the chosen cooking cycles to optimize the processes in the kitchen reduxing time and energy consumption.

## **Included Accessories**

- 10 of Aisi 304 stainless steel grid (18" x PNC 922076 26")
- 1 of 20 Tray Rack Trolley, Full Sheet PNC 922757 Pans, 2 ½" (63mm) pitch for 202 ovens and blast chillers

## **Optional Accessories**

for Touchline ovens)

| Water softener with cartridge STEAM     1200  | PNC 920003 |  |
|---|------------|--|
| <ul> <li>Pair of half size oven racks, type 304 stainless steel</li> </ul>                    | PNC 922017 |  |
| • Chicken racks, pair (2) (fits 8 chickens per rack)  | PNC 922036 |  |
| <ul> <li>Single 304 stainless steel grid (12" x 20")</li> </ul>                               | PNC 922062 |  |
| <ul> <li>External side spray unit</li> </ul>  | PNC 922171 |  |
| <ul> <li>Baguette tray, made of perforated<br/>aluminum, silicon coated, 16" x 24"</li> </ul> | PNC 922189 |  |
| <ul> <li>Perforated baking tray, made of<br/>perforated aluminum, 16" x 24"</li> </ul>        | PNC 922190 |  |
| <ul> <li>Baking tray, made of aluminum 16" x<br/>24"</li> </ul>                               | PNC 922191 |  |
| <ul> <li>Pair of frying baskets</li> </ul>  | PNC 922239 |  |
| <ul> <li>Grid for whole chicken 1/1GN (8 per grid - 2.6 lbs each)</li> </ul>                  | PNC 922266 |  |
| • USB Probe for sous-vide cooking (only   | PNC 922281 |  |


 Skewers for ovens, (6) 14" short PNC 922328 (TANDOOR) PNC 922338 Smoker for ovens PNC 922348 Multipurpose hook • Grid for 8 whole ducks (1.8KG, 4LBS) -PNC 922362 GN 1/1 Thermal blanket for 202 oven (trolley PNC 922367 not included) HOLDER FOR DETERGENT TANK -PNC 922386 WALL MOUNTED USB SINGLE POINT PROBE PNC 922390 • External connection kit for detergent PNC 922618 and rinse aid Dehydration tray, (12" x 20"), H=2/3" PNC 922651 • Flat dehydration tray, (12" x 20") PNC 922652 Heat shield for 202 combi oven PNC 922658 PNC 922670 • Kit to convert from natural gas to LPG • Kit to convert from LPG to natural gas PNC 922671 PNC 922678 • Flue condenser for gas oven • Trolley with tray rack, 202 combi oven, PNC 922686 h=85mm (3 1/3") PNC 922687 Kit to fix oven to the wall 4 flanged feet for 201 and 202 combi PNC 922707 ovens, 2", 100-130mm (4"-5") PNC 922713 Mesh grilling grid (12" x 20") Probe holder for liquids PNC 922714 • Holder for trolley handle (when trolley PNC 922743 is in the oven) for 201 and 202 combi ovens Tray for traditional static cooking, PNC 922746 H=100mm (12' x 20") • Double-face griddle, one side ribbed PNC 922747 and one side smooth, 400x600mm 20 Tray Rack Trolley, Full Sheet Pans, 2 PNC 922757  $\frac{1}{2}$ " (63mm) pitch for 202 ovens and blast chillers 16 Tray Rack Trolley, Full Sheet Pans, 3" PNC 922758 (80mm) pitch for 202 ovens and blast chillers 202 Banquet trolley for oven and blast PNC 922760 chiller for 92 plates holding, 3.3 (85mm) pitch BAKERY/PASTRY TROLLEY FOR 20 GN PNC 922762 2/1 OVEN - 16 RACKS 400X600MM -80MM PITCH 201 Banquet trolley for combi and blast PNC 922764 chiller for 116 plates holding, 2.5" 66mm pitch KIT COMPATIBILITY FOR AOS/ PNC 922770 EASYLINE TROLLEYS (PRODUCED TILL 2019) WITH SKYLINE/MAGISTAR COMBI ÓVENS 20GN2/1 KIT COMPATIBILITY FOR AOS/ PNC 922771 EASYLINE OVENS 20GN WITH SKYLINE/MAGISTAR TROLLEYS WATER INLET PRESSURE REDUCER PNC 922773 Extension for condensation tube, 37cm PNC 922776 Non-stick universal pan (12" x 20" x 1 PNC 925001 1/2") Non-stick universal pan (12" x 20" x 2 PNC 925002 1/2")



- Frying griddle double sided (ribbed/ PNC 925003 smooth) 12" x 20"
- Aluminum combi oven grill (12" x 20") PNC 925004
- Egg fryer for 8 eggs (12" X 20") PNC 925005
- Flat baking tray with 2 edges (12" x 20") PNC 925006
- Potato baker GN 1/1 for 28 potatoes
   PNC 925008
   (12"X20")



# SkyLine ProS Natural Gas Boilerless Combi Oven 202 120V

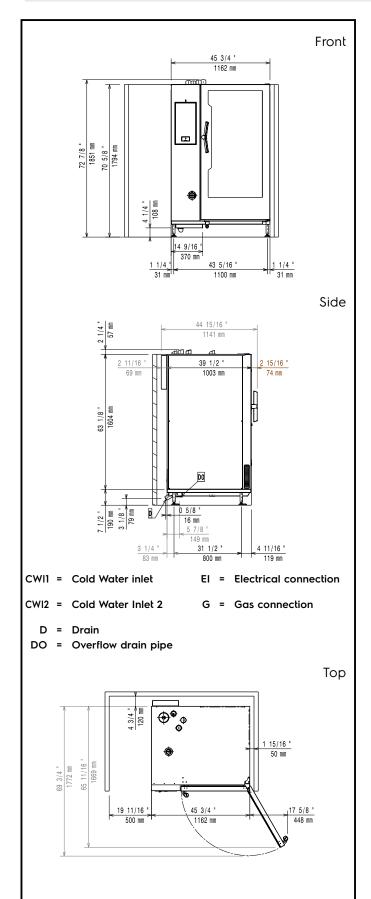

| Electric   |   |
|--|---|
| Supply voltage:<br>Electrical power, max:<br>Electrical power, default:<br>Maximum Over-Current<br>Protection (MOP):   | 120 V/1 ph/60 Hz<br>2.5 kW<br>2.5 kW<br>0A  |
| Gas  |   |
| Static Pressure:<br>219685 (ECOG202K3O0)<br>Dynamic Pressure:<br>Electrolux Professional does not<br>outlet. If a GFCI outlet is require<br>with a trip rating of 20 mA must<br>Gas Power:<br>Standard gas delivery:<br>ISO 7/1 gas connection | d by code, a commercial GFCI<br>be used.<br>82.5 kW<br>Natural Gas G20  |
| diameter:  | 1" MNPT   |
| Water:<br>Water Cold Supply<br>Connection:   | 3/4"  |
| Cold Water Inlet Connection:<br>Drain "D":   | 3/4" GHT<br>2" (50 mm)  |
| Max inlet water supply<br>temperature:<br>Water inlet cold 1:<br>Water inlet cold 2:<br>Electrolux Professional recomm<br>based on the water specs listed<br>Pressure:   | 86°F (30°C)<br>unfiltered<br>filtered<br>nends the use of treated water,  |
| Chlorides:   | <17 ppm   |
| Conductivity:  | >50 µS/cm   |
| Installation:  |   |
| Clearance:<br>Suggested clearance for  | Clearance: 2 in (5 cm) rear<br>and right hand sides.  |
| service access:  | 20 in (50 cm) left hand side.   |
| Capacity:  |   |
| Max load capacity:<br>Full-size sheet pans:  | 440 lbs (200 kg)<br>20 - 18" X 26"  |
| Key Information:   |   |
| Door hinges:<br>External dimensions, Width:<br>External dimensions, Depth:<br>External dimensions, Height:<br>Net weight:<br>Shipping width:<br>Shipping depth:<br>Shipping height:<br>Shipping weight:<br>Shipping volume:                    | Right Side<br>45 3/4" (1162 mm)<br>42 " (1066 mm)<br>70 5/8" (1794 mm)<br>786 lbs (356.5 kg)<br>47 1/4" (1200 mm)<br>45 1/4" (1150 mm)<br>79 1/8" (2010 mm)<br>870 lbs (394.5 kg)<br>97.94 ft <sup>3</sup> (2.77 m <sup>3</sup> ) |
| ISO Certificates   |   |



| ISO Standards:       | ISO 9001; ISO 14001; ISO<br>45001; ISO 50001 |
|----------------------|--|
| Sustainability       |  |
| Current consumption: | 20.8 Amps                                    |

