


Vegetable Slicer TrinityPro Vegetable Slicers 1800 rpm, 2 discs included

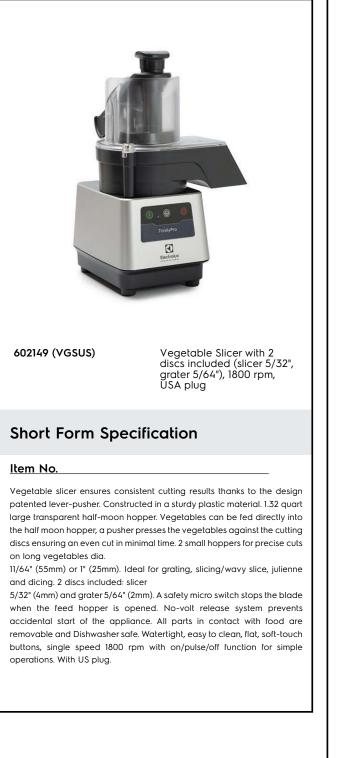

ITEM #		-
MODEL #		_
NAME #		_
<u>SIS #</u>		_
AIA #		_
		_

### **Main Features**

- Vegetable slicer unit has slicing, grating, shredding (julienne) as well as dicing and french fries capabilities.
- Continuous feed model.
- Equipped with half moon hopper (1.32 qt capacity) and 2 small round feed chutes: 1" (25mm) and or 2 11/64" (55mm), for precise slicing of long shaped vegetables.
- Uniform cuts and maximized load capacity, thanks to the design patented lever-pusher.
- Large output chute for efficient ejection. Fits up to 7 3/4 " high standard kitchen containers (like GN) under the output chute.
- Pulse function for quick and precise slicing and grating.
- Vegetable slicer blade stops when lever pusher is lifted for operator safety.
- Optional discs available of various sizes for slicing, grating and shredding.
- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Easy to clean and watertight control panel with on/off button and pulse function.
- Productivity up to 100 settings per service.
- ErgoCert 4-star certification for ergonomic design and ease of use.
- Model includes 2 discs: 5/64" (2mm) grater, 5/32" (4mm) slicer.

# Construction

- compact design, easy to move and store.
- IPX5 (IP55) flat panel touch-control, watertight panel.
- Main switch ON/OFF on the back of the appliance.
- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor shaft.
- Food safety assured thanks to BPA-free materials and compliance with NSF standards.
- Product safety in accordance with international and UL standards.
- 1 speed: 1800 rpm.
- Motor power: 1 HP / 750 Watt.

# **Included Accessories**

- 1 of STAINLESS STEEL GRATING PNC 650198 DISC 5/64" (2 MM)
- 1 of EJECTOR FOR VEGETABLE PNC 650232
   SLICER
- 1 of STAINLESS STEEL SLICING DISC PNC 650237 5/32" (4 MM)

### **Optional Accessories**

 Cleaning tool for TRS, TRK & TR210 PNC 650110 3/16"-5/16"-3/8 " (5-8-10 mm) dicing grids

APPROVAL:

0




• 3 DISCS SET TRK1 (5/64" SLICER, 3/16" SLICER, 1/8" GRATER)	PNC 650196	
<ul> <li>6 DISCS SET (5/64" SLICING, 3/16" SLICING, 1/8" GRATING, 9/32"</li> </ul>	PNC 650197	
GRATING, 3/8" SLICER, 3/8"X3/8 " GRID)		
• STAINLESS STEEL GRATING DISC 5/64 " (2 MM)	PNC 650198	
• STAINLESS STEEL GRATING DISC 1/8 " (3 MM)	PNC 650199	
• STAINLESS STEEL GRATING DISC 5/32 " (4 MM)	PNC 650205	
• STAINLESS STEEL GRATING DISC 9/32 " (7 MM)	PNC 650207	
PARMESAN DISC	PNC 650208	
<ul> <li>STAINLESS STEEL JULIENNE DISC 5/64" (2 MM)</li> </ul>	PNC 650209	
<ul> <li>STAINLESS STEEL JULIENNE DISC 5/32" (4 MM)</li> </ul>	PNC 650210	
• STAINLESS STEEL JULIENNE DISC 5/16 " (8 MM) FOR FRENCH FRIES	PNC 650211	
• STAINLESS STEEL SLICING DISC 1/32 " (1 MM)	PNC 650213	
• STAINLESS STEEL SLICING DISC 5/64 " (2 MM)	PNC 650214	
<ul> <li>STAINLESS STEEL SLICING DISC 1/8 " (3 MM)</li> </ul>	PNC 650215	
• STAINLESS STEEL SLICING DISC 3/16 " (5 MM)	PNC 650216	
STAINLESS STEEL SLICING DISC 1/4     " (6 MM)	PNC 650217	
STAINLESS STEEL WAVY SLICING DISC 1/8" (3 MM)	PNC 650218	
<ul> <li>STAINLESS STEEL WAVY SLICING DISC 3/16" (5 MM)</li> </ul>	PNC 650219	
ALUMINUM SLICING DISC 5/16" (8     MM)	PNC 650220	
ALUMINUM SLICING 3/8" (DISC 10 MM)	PNC 650221	
• DICING GRID 5/16"X5/16" (8x8 MM)	PNC 650222	
• DICING GRID 3/8"x3/8" (10X10 MM)	PNC 650223	$\overline{\mathbf{n}}$
<ul> <li>DICING KIT 5/16" - ALUMINUM</li> </ul>	PNC 650224	
SLICER 5/16", GRID 5/16"x5/16" (8X8MM)	1110 000224	-
<ul> <li>DICING KIT 3/8" - ALUMINUM SLICER 3/8", GRID 3/8"x3/8" (10X10 MM)</li> </ul>	PNC 650225	
• EJECTOR FOR VEGETABLE SLICER	PNC 650232	
STAINLESS STEEL SUCING DISC 5/32	PNC 650237	

• STAINLESS STEEL SLICING DISC 5/32 PNC 650237 " (4 MM)



# Vegetable Slicer TrinityPro Vegetable Slicers 1800 rpm, 2 discs included

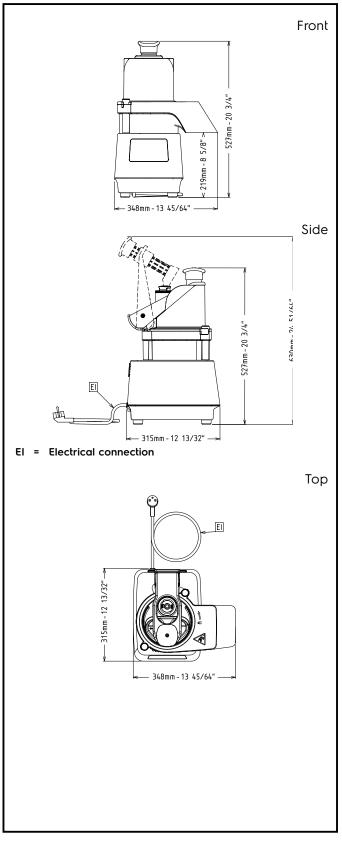

Electric	
Supply voltage: Electrical power, max: Total Watts:	115 V/1N ph/60 Hz 1 kW 1 kW
Capacity:	
Performance (up to):	150 kg/hour
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Shipping weight:	348 mm 315 mm 527 mm 21 kg

