



Electrolux
PROFESSIONAL

Modular Cooking Range Line Automatic Electric Pasta Cooker, 1 Well, 5.3 Gallons (24,5Lt)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371174 (E7PCEDIKF1)

5.3 GAL ELECTRIC
AUTOMATIC
PROGRAMMABLE PASTA
COOKER WITH 1 WELL, 2
BASKETS AND RAPID
SYSTEM

Short Form Specification

Item No.

Infrared heating system positioned below the well. Constant starch removal during the cooking process. Pressed tank in 316 AISI stainless steel to protect against corrosion. Control panel with energy regulator to regulate working conditions. Height adjustable feet in stainless steel. Exterior panels in stainless steel with scotch brite finish. One piece pressed work top in 1.5mm thick stainless steel. Right angled side edges to allow flush fitting junction between units.

Main Features

- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- Unit to have infrared heating system positioned beneath the base of the well.
- Water basin in 316 type Stainless steel.
- Electric pre-heating system built-in to the unit for high thermal efficiency and rapid temperature recovery.
- Electrically-heated 3.5kW water boiler guarantees high thermal efficiency, rapid temperature recovery and a superior production rate.
- Unit to feature skimming zone for starch removal: improved water quality over time.
- Easy-to-use control panel with switch to regulate rapid filling and refilling with pre-heated water.
- Safety thermostat to avoid operation without water.
- Large drain with manual ball-valve for fast emptying of well.
- Automatic lifting system: two stainless steel basket supports, holding one GN 1/2 basket each, to provide automatic lifting of baskets upon cycle termination. Possibility to program 5 different cooking times per basket in addition to the selection of 4 different boiling cycles, from gentle (home-made fresh pasta) to full power (regular pasta).
- All major compartments located in front of unit for ease of maintenance.
- Unit delivered with four 2" (50mm) legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 0.06" (1.5mm) work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Water basin is seamlessly welded into the top of the appliance.
- IPx4 water protection.

APPROVAL: _____

Electrolux
PROFESSIONAL

Modular Cooking Range Line
Automatic Electric Pasta Cooker, 1 Well, 5.3 Gallons (24,5Lt)

Electrolux Professional, Inc.
www.electroluxprofessional.com

4003 Collins Lane Louisville, KY 40245 USA - fax number: 706-447-6228

Included Accessories

- 1 of Pair of single portion baskets for automatic programmable 5.3 gallon (20 Lt) pasta cooker (can be used with built-in lifting system). To be used with support PNC 206362 PNC 206312

Optional Accessories


- | | | |
|--|------------|--------------------------|
| • Junction sealing kit | PNC 206086 | ☐ |
| • Kit 4 wheels - 2 swiveling with brake | PNC 206135 | ☐ |
| • Flanged feet kit | PNC 206136 | ☐ |
| • Frontal kicking strip, 15 3/4" wide | PNC 206175 | ☐ |
| • Frontal kicking strip, 31 1/2" wide | PNC 206176 | ☐ |
| • Frontal kicking strip, 39 3/8" wide | PNC 206177 | ☐ |
| • Frontal kicking strip, 47 1/4" wide | PNC 206178 | ☐ |
| • Frontal kicking strip, 63" wide | PNC 206179 | ☐ |
| • 4 feet for concrete installation | PNC 206210 | ☐ |
| • Chimney upstand, 16" (400mm) | PNC 206303 | ☐ |
| • Right and left side handrails | PNC 206307 | ☐ |
| • - NOT TRANSLATED - | PNC 206308 | ☐ |
| • Pair of single portion baskets for automatic programmable 5.3 gallon (20 Lt) pasta cooker (can be used with built-in lifting system). To be used with support PNC 206362 | PNC 206312 | ☐ |
| • Pair of double portion baskets for automatic programmable 5.3 gallon (20 Lt) pasta cooker (can be used with built-in lifting system). To be used with support PNC 206362 | PNC 206314 | ☐ |
| • Support for baskets to be used with baskets for built-in lifting system in automatic programmable 5.3 gallon (20 Lt) pasta cooker | PNC 206362 | ☐ |
| • Base support assembly 16" (400 mm) for wheels for pasta cookers. To be used with PNC 206135. | PNC 206366 | ☐ |
| • Base support assembly 32" (800 mm) for wheels for pasta cookers. To be used with PNC 206135. | PNC 206367 | ☐ |
| • Base Support Assembly, 48" (1200mm) wide, for feet/wheels | PNC 206368 | ☐ |
| • Base Support Assembly, 64" (1600mm) wide, for feet/wheels | PNC 206369 | ☐ |
| • Base Support Assembly, 80" (2000mm) wide, for feet/wheels | PNC 206370 | ☐ |
| • Rear paneling - 600mm | PNC 206373 | ☐ |
| • Rear paneling - 800mm | PNC 206374 | ☐ |
| • Rear paneling - 1000mm | PNC 206375 | ☐ |
| • Rear paneling - 1200mm | PNC 206376 | ☐ |
| • 2 side covering panels for free standing appliances | PNC 216000 | ☐ |
| • FRONTAL HANDRAIL 400 MM | PNC 216046 | ☐ |
| • FRONTAL HANDRAIL 800 MM | PNC 216047 | ☐ |
| • FRONTAL HANDRAIL 1200 MM | PNC 216049 | ☐ |
| • FRONTAL HANDRAIL 1600 MM | PNC 216050 | ☐ |
| • Large handrail - portioning shelf, W=15 3/4" | PNC 216185 | ☐ |
| • Large handrail - portioning shelf, W=31 1/2" | PNC 216186 | ☐ |
- Pair of square baskets (4" x 6") left and right for 5.3 (20 Lt) and 6.5 (25 Lt) gallon pasta cooker. 4 baskets can be fitted in pasta cooker. To be used with support PNC 921022 PNC 921020 ☐
 - Pair of square baskets (4" x 4") left and right, for 5.3 (20 Lt) and 6.5 (25 Lt) gallon pasta cooker. To be used with PNC 921022 PNC 921021 ☐
 - Support for baskets for 5.3 (20 Lt) and 6.5 (25 Lt) gallon pasta cooker PNC 921022 ☐
 - Pair of baskets (7.5" x 8.5") for 5.3 (20 Lt) and 6.5 (25 Lt) gallon pasta cooker PNC 921610 ☐
 - Single basket (13 3/4" x 8 11/16") for 5.3 (20 Lt) and 6.5 (25 Lt) gallon pasta cooker PNC 921611 ☐




Electrolux
PROFESSIONAL

Modular Cooking Range Line Automatic Electric Pasta Cooker, 1 Well, 5.3 Gallons (24,5Lt)

Front

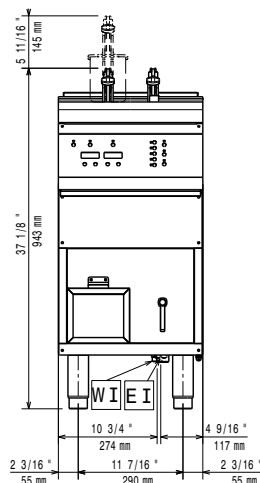


Side

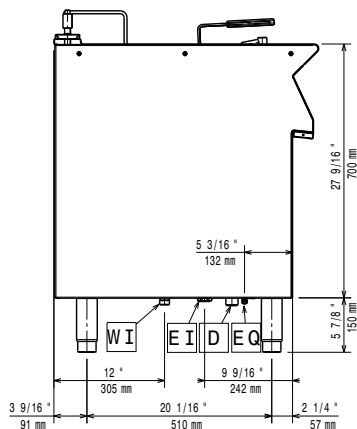

D = Drain
EI = Electrical connection
EQ = Equipotential screw
WI = Water inlet

Top



Electric

Supply voltage:	208 V/3 ph/60 Hz
Rated amps:	23 A
Electrical power, max:	8.6 kW
Total Watts:	8.6 kW

Water:

Total hardness:	5-50 ppm
Drain "D":	1"
Incoming Cold/hot Water line size:	3/4"

Electrolux Professional recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width): 9 13/16" (250 mm)

Usable well dimensions (depth): 15 3/4" (400 mm)

Usable well dimensions (height): 11 13/16" (300 mm)

External dimensions, Width: 15 3/4" (400 mm)

External dimensions, Depth: 28 3/4" (730 mm)

External dimensions, Height: 33 7/16" (850 mm)

Net weight: 121 lbs (55 kg)

Shipping width: 18 7/8" (480 mm)

Shipping depth: 32 1/4" (820 mm)

Shipping height: 44 1/16" (1120 mm)

Shipping weight: 157 lbs (71 kg)