



**Electrolux**  
PROFESSIONAL

## Hand held Mixers Bermixer PRO 650W with Stainless Steel Tube 26"

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



**602193**  
**(BP6565U)**

Bermixer PRO, portable, hand held immersion blender, variable speed, handle grip, with 26" cutter tube, 1 HP, 650 watt, NEMA 1-15P

### Short Form Specification

#### Item No. \_\_\_\_\_

Bermixer PRO, portable, hand held immersion blender, variable speed, handle grip, with 26" stainless steel cutter tube, 1 HP, 650 watt, 115v/60/1. Stainless steel tubes (various lengths) and whisk available upon request as an accessory, to mix, liquidize, whip or emulsify.

IP55 water protected control panel.

With NEMA 5-15P Plug

### Main Features

- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Anti-splash bell knife design.
- Bayonet system makes fast and simple to exchange tools.
- Overheating warning red indicator.
- Tube, knife and whisks are dishwasher safe.
- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
- Delivered with:-flat base motor-stainless steel tube-space saving storing wall support
- Designed to be used directly in stew pots up to 63gal (240 lt).
- Very easy to use, assemble and dismantle.
- Bayonet system to easily remove accessories without the use of tools.
- Red luminous indicator flashes when the device is overloaded.
- Its light weight ensures an optimum comfort for the user.
- Thanks to its electronic speed variator, a quick press with the thumb on the selector is all you need to change speeds.
- Productivity suitable for 50 to 300 meals per service.

### Construction

- Smart speed control to ensure the right power according to the work load.
- Power: 650 watts.
- Maximum speed 10000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Water protected motor unit (controls are IP55, IP34 throughout machine).

#### Included Accessories


- 1 of Stainless Steel cutter tube 26in (553mm) PNC 650135

#### Optional Accessories


- |   |            |                          |
|---|------------|--------------------------|
| • Stainless Steel cutter tube 14in (353mm)    | PNC 650132 | <input type="checkbox"/> |
| • Stainless Steel cutter tube 18in (453mm)    | PNC 650133 | <input type="checkbox"/> |
| • Stainless Steel cutter tube 22in (553mm)    | PNC 650134 | <input type="checkbox"/> |
| • Stainless Steel cutter tube 26in (553mm)    | PNC 650135 | <input type="checkbox"/> |
| • Adjustable rail, for containers 15in - 26in | PNC 653292 | <input type="checkbox"/> |
| • Bowl cradle for containers                  | PNC 653294 | <input type="checkbox"/> |
| • Reinforced whisk 10in                       | PNC 653578 | <input type="checkbox"/> |

APPROVAL: \_\_\_\_\_

Front

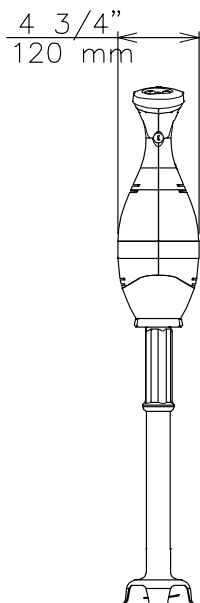


Side

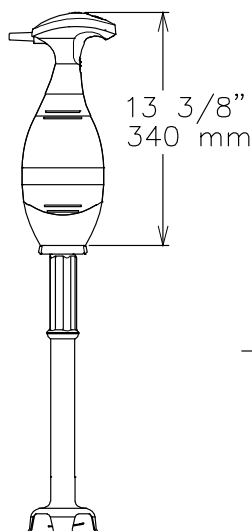

El = Electrical connection

Top



### Electric

Supply voltage:	110-120 V/1 ph/50/60 Hz
Total Watts:	0.65 kW
Plug type:	USA NEMA 5-15P

### Key Information:

External dimensions, Width:	5 7/16" (138 mm)
External dimensions, Depth:	4 3/4" (120 mm)
External dimensions, Height:	38 " (965 mm)
Shipping width:	11 7/16" (290 mm)
Shipping depth:	27 3/16" (690 mm)
Shipping height:	7 1/16" (180 mm)
Shipping weight:	12 lbs (5.61 kg)