

## Hand held Mixers

### Bermixer PRO 750W with Stainless Steel Tube 22"


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**602194 (BP7555U)**      Bermixer PRO, portable hand held immersion blender, variable speed, handle grip, with 22" stainless steel cutter tube, 1 HP, 750 watt.

---

### Short Form Specification

**Item No.** \_\_\_\_\_


Bermixer PRO, portable hand held immersion blender, variable speed, handle grip, with 22" stainless steel cutter tube, 1 HP, 750 watt, 115v/60/1. Stainless steel tubes (various lengths) and whisk available upon request as an accessory, to mix, liquidize, whip or emulsify.

IP55 water protected control panel.  
 With NEMA 5-15P Plug


- #### Main Features
- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
  - Designed to be used directly in stew pots up to 71gal (270Lt).
  - Delivered with:-flat base motor-stainless steel tube-space saving storing wall support
  - Anti-splash bell knife design.
  - Tube, knife and whisks are dishwasher safe.
  - Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
  - Overheating warning red indicator.
  - Bayonet system makes fast and simple to exchange tools.
  - Productivity suitable for 50 to 300 meals per service.
- #### Construction
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
  - Maximum speed 10000 rpm.
  - Power: 750 watts (1 HP).
  - Smart speed control to ensure the right power according to the work load.
  - Water protected motor unit (controls are IP55, IP34 throughout machine).
- |   |                                     |
|---|-------------------------------------|
| <b>Included Accessories</b>                     |                                     |
| • 1 of Stainless Steel cutter tube 22in (553mm) | PNC 650134                          |
| <b>Optional Accessories</b>                     |                                     |
| • Stainless Steel cutter tube 18in (453mm)      | PNC 650133 <input type="checkbox"/> |
| • Stainless Steel cutter tube 22in (553mm)      | PNC 650134 <input type="checkbox"/> |
| • Stainless Steel cutter tube 26in (553mm)      | PNC 650135 <input type="checkbox"/> |
| • Adjustable rail, for containers 15in - 26in   | PNC 653292 <input type="checkbox"/> |
| • Bowl cradle for containers                    | PNC 653294 <input type="checkbox"/> |
| • Reinforced whisk 10in                         | PNC 653578 <input type="checkbox"/> |

APPROVAL: \_\_\_\_\_

Front

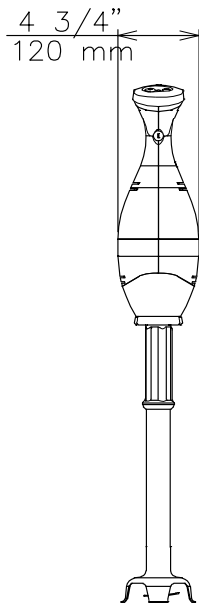


Side

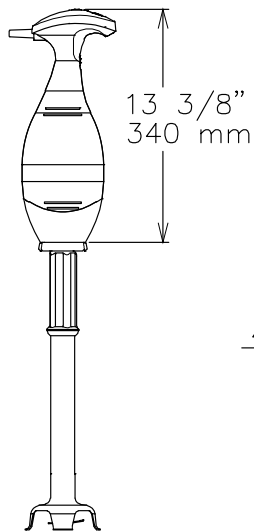

EI = Electrical connection

Top


**Electric**
**Supply voltage:**

602194 (BP7555U)

110-120 V/1 ph/50/60 Hz

**Total Watts:**

0.8 kW

**Plug type:**

USA NEMA 5-15P

**Key Information:**
**External dimensions, Width:** 5 7/16" (138 mm)

**External dimensions, Depth:** 4 3/4" (120 mm)

**External dimensions, Height:** 34 1/16" (865 mm)

**Shipping width:** 11 7/16" (290 mm)

**Shipping depth:** 27 3/16" (690 mm)

**Shipping height:** 7 1/16" (180 mm)

**Shipping weight:** 12 lbs (5.42 kg)