



**Warewashing
Green&Clean Hood Type Dishwasher,
Manual with ESD, ZERO LIME Device
& CLEAR BLUE System**

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



**Warewashing
Green&Clean Hood Type Dishwasher, Manual with ESD, ZERO
LIME Device & CLEAR BLUE System**



504279 (EHT8IELG4) Green & Clean Hood Type Dishwasher, Manual double skin hood with ESD, ZERO LIME Device, CLEAR BLUE Filtering System, Detergent and Rinse aid dispensers, 80racks/hour - 240 V/3/60 Hz

504280 (EHT8IELG8) Green & Clean Hood Type Dishwasher, Manual double skin hood with ESD, ZERO LIME Device, CLEAR BLUE Filtering System, Detergent and Rinse aid dispensers, 80racks/hour - 208 V/3/60 Hz

Short Form Specification

Item No.

Unit to be Electrolux Professional Green & Clean EHT hot water sanitizing dishwasher with WASH SAFE CONTROL. Electrical characteristics to be 240 volts or 208 volts, three phase operation. Features Energy Saving Device (ESD) to recover the steam heat. ESD to need no more than 11 seconds to recover the steam heat. Unit to feature atmospheric built-in booster system with built-in rinse booster pump thus guaranteeing rinse pressure during rinse cycle. Maximum water consumption of 1/2 gal (2 L) per rack. Washing performance is guaranteed by a powerful 1.1 HP (0.8 kW) wash pump and upper and lower stainless steel revolving washing spray arms. Unit to feature ZERO LIME Device to automatically de-scale the whole hydraulic circuit and washing chamber. features "WASH SAFE CONTROL" LED light. Green light will indicate that all items washed have been properly rinsed. CLEAR BLUE filtering system to remove majority of soil from the wash water. 304 Stainless steel construction to include double skin insulated hood, external, front and side panels, wash tank, tank filter plus wash and rinse arms. Field convertible from straight to corner operation. Includes drain pump, detergent and rinse aid dispenser pumps and is equipped with flexible fill hoses. Delivered on height-adjustable feet. Covered by Electrolux Professional Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-



APPROVAL: _____

up after one year from installation.

Main Features

- CLEAR BLUE advanced filtering system provides cleaner wash water and higher active detergent thus ensuring better washing performances and lower running costs.
- ETL-Sanitation approved (ANSI/NSF 3 sanitation standard) and DIN 10512 compliant.
- Requires only 0.6gal (2 liters) of water per washing cycle thus ensuring low energy, water, detergent and rinse aid consumption.
- Built-in atmospheric boiler sized to raise incoming water to a minimum of 183 °F (84 °C) for sanitizing rinse. No external booster is required. Constant temperature of 183 °F (84 °C) throughout the rinsing cycle regardless of the network's water pressure.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- Unique temperature interlock guarantees required temperatures in both the wash and final rinse.
- Incorporated Soft Start feature to offer additional protection to more delicate items.
- Slanted wash arms and sloped ceiling to avoid detergent-filled wash water dropping on clean dishes after the rinsing phase, thus guaranteeing ideal washing results.
- Cycle may be interrupted at any time by lifting the hood.
- Automatic self-cleaning cycle and self-draining vertical wash pump and boiler to avoid bacteria proliferation.
- State-of-the-art electronic controls with built-in programming, self-diagnostics for serviceability and automatic interior self-cleaning cycle.
- Built-in rinse aid and detergent dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- IP25 protection against water jet, solid objects and small animals (larger than 0.2").
- Built-in high efficiency Energy Saving Device (ESD) transfers the heat captured inside the machine to the incoming cold water before entering the boiler, thus saving energy; no ventilation hood is needed for the machine (depending on local regulation and conditional on compliance with VDI 2052).
- Maximum capacity per hour of 80 racks or 1.440 dishes.

Construction

- Heavy duty Stainless steel construction. Internal cavity as well as exterior panels are in 304 series Stainless steel.
- Double skin insulated hood.
- Specially designed Stainless steel wash/rinse arms and nozzles provide superior cleaning action.
- Revolving interchangeable Stainless steel wash/rinse arms above and below the rack, screw out for simple clean up.
- Pre-arranged for on-site HACCP implementation and Energy Management device.
- Element protection from dry fire and low water.
- Unit to include drain, detergent and rinse aid dispenser pumps.
- Utilizes standard 20" by 20" (500x500mm) racks for ease of operation.
- 17- 5/16" (440mm) door opening accepts 18" trays.

Electrolux Professional, Inc.

www.electroluxprofessional.com

4003 Collins Lane Louisville, KY 40245 USA - fax number: 706-447-6228




Included Accessories

- 2 of Yellow cutlery container PNC 864242
- 1 of Basket for (18) dinner plates, yellow PNC 867002
- 1 of Basket for (48) small cups or (24) large cups, blue PNC 867007


Optional Accessories

- HACCP connection cable for double skin hood type PNC 864007
- - NOT TRANSLATED - PNC 864461
- - NOT TRANSLATED - PNC 864463
- - NOT TRANSLATED - PNC 864464
- Connecting kit for duet manual hood type dishwasher PNC 865264
- - NOT TRANSLATED - PNC 865493

Front

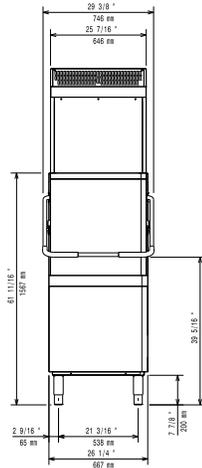


Side

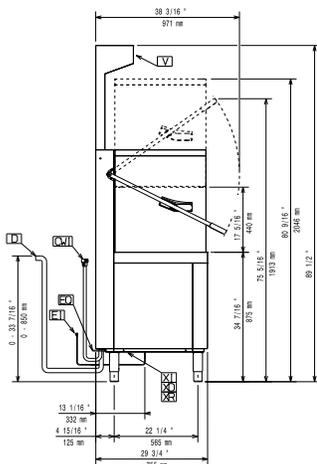

- CW11** = Cold Water inlet
- XI** = Chemicals inlet
- D** = Drain
- XR** = Rinse aid connection
- EI** = Electrical connection
- EO** = Electrical Outlet
- V** = Vents
- WI** = Water inlet
- XD** = Detergent connection

Top

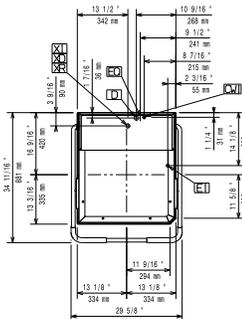

Electric

Supply voltage:	
504279 (EHT8IELG4)	240 V/3 ph/60 Hz
504280 (EHT8IELG8)	208 V/3 ph/60 Hz
Default Installed Power: 9.9 kW at 50°F (10°C)	
Boiler Heating Elements Power: 9.9 kW at 50°F (10°C)	
Tank heating elements: 3 kW	
Wash pump size: 1.1 hp (0.8 kW)	
Minimum current:	
504279 (EHT8IELG4)	24A
504280 (EHT8IELG8)	28A
Maximum Over-Current Protection (MOP):	
504279 (EHT8IELG4)	40A
504280 (EHT8IELG8)	50A
Minimum Circuit Ampacity (MCA):	
504279 (EHT8IELG4)	34A
504280 (EHT8IELG8)	40A

Water:

Water supply temperature:	50-68°F (10-30 °C)
Inlet Water supply pressure:	7 - 102 psi (0.5 - 7 bar)
Water consumption per cycle:	0.53 gal (2 L)
Booster Capacity:	3.17 gal (12 L)
Tank Capacity:	6.34 gal (24 L)
Drain line size:	0.8" (20.5 mm) pumped drain

Key Information:

Wash temperature (MIN):	
504279 (EHT8IELG4)	160 °F (71 °C)
504280 (EHT8IELG8)	160 °F (71 °C)
N° of cycles: 3	
Duration cycle - NSF:* 57/84/150 sec.	
Racks per hour - ETL-S: * 63	
Dishes per hour - ETL-S: * 1134	
Rinse temperature (MIN): 183.2°F (84°C)	
External dimensions, Width: 29 5/8" (752 mm)	
External dimensions, Depth: 29 3/4" (755 mm)	
External dimensions, Height: 89 1/2" (2273 mm)	
Net weight: 331 lbs (150 kg)	
Shipping width: 36 1/4" (920 mm)	
Shipping depth: 30 5/16" (770 mm)	
Shipping height: 67 3/4" (1720 mm)	
Shipping weight:	
504279 (EHT8IELG4)	287 lbs (130 kg)
504280 (EHT8IELG8)	313 lbs (142 kg)
Shipping volume: 43.02 ft³ (1.22 m³)	
Noise level: <63 dBA	






Air Emission:

Air Flow:	17 CFM (28 m3/h)
Air temperature:	86°F (30°C)
Air humidity:	55% r.h.

* without considering additional 11 seconds for ESD operation.



Recommended table connection

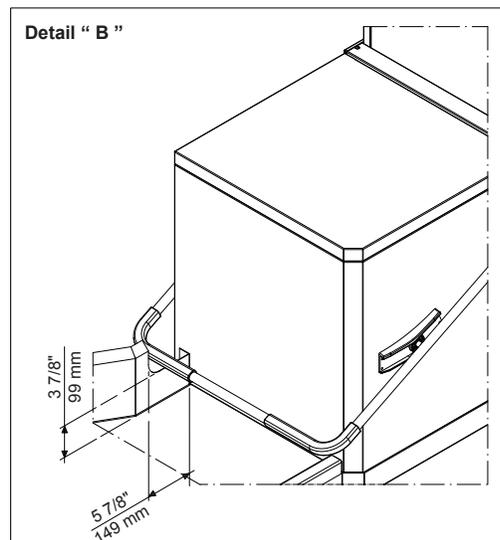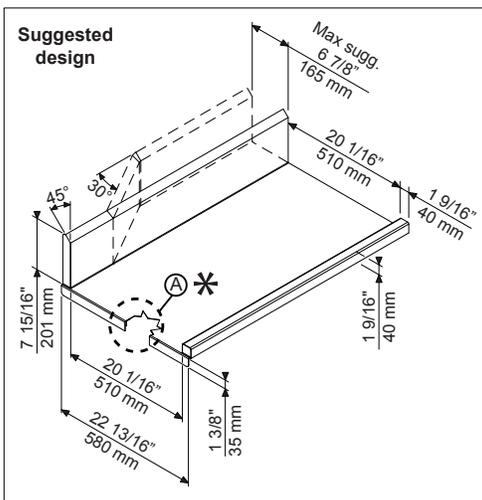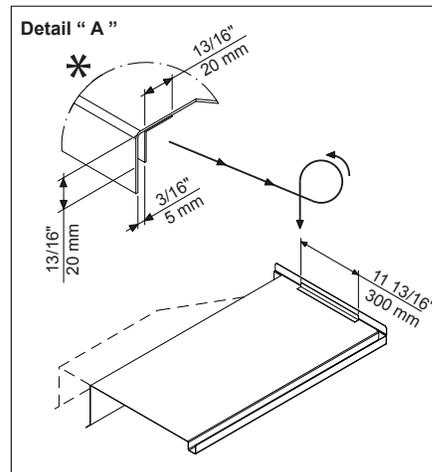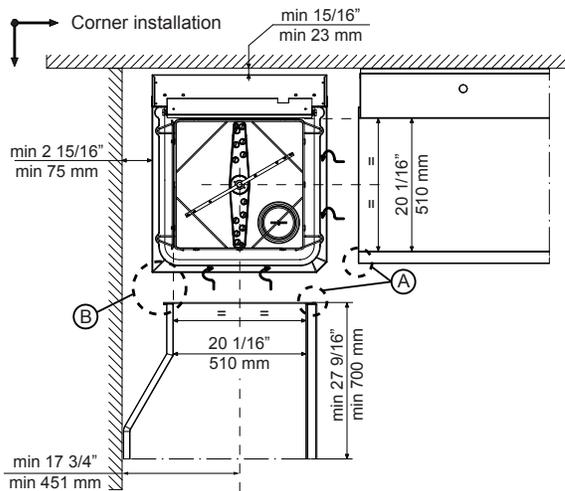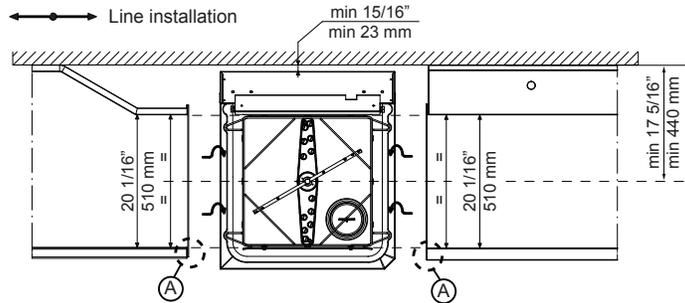

All tables must be connected to the dishwashing units according to local regulations and industry standards which may differ from the recommendations herein suggested. Electrolux Professional is not liable for any failure in complying with local design standards.

Doc Nr : 59566BF00