Electrolux PROFESSIONAL

Vegetable Slicer
TR260 Vegetable Slicer - 2 Speed - lever hopper

ITEM #

MODEL #

NAME #

SIS #

AIA #



603286 (TR260FH23U) TR260 Vegetable Slicer - 2 Speed - lever hopper - 208V

Short Form Specification

Item No.

TR26023U-High Volume Production Vegetable Cutter, continuous feed design, large single feed hopper, handle pusher, standard ejector, stainless steel construction, 2-2/3 HP, 208-240v/60/3, 8.3 amps, 2 kW, NEMA L15-20P

APPROVAL:

Main Features

- Continuous feed model.
- Optional stainless steel mobile stand accessory.
- Magnetic safety system and motor brake. Prevents machine from running when lever swings away or is open.
- Available upon request:-Automatic hopper (dia=280 mm), lever-operated hopper, long vegetable hopper (3 tubes) and cabbage hopper.
- Complete selection of blades and dicing grids available (diameter 300 mm).
- Vegetable slicer unit has slicing, grating, shredding (julienne) as well as dicing and french fries capabilities.
- "No volt release" safety device.
- Available as option a long vegetable accessory to fit in the lever operated hopper converting it into a long vegetable hopper (3 cylindrical hoppers: 50, 59,5, 70 mm diameter)
- Suitable for up to 600 meals for table service and up to 2000 meals for catering service.

Construction

- 2 speed: 330-660 rpm.
- Power: 2000 or 2200 watts.
- Capacity depending on the hopper:
  -lever hopper: 1500lbs/hr (700kg/hr)
  -automatic hopper: 5500lbs/hr (2500kg/hr)

Included Accessories

• 1 of Feed tray to be combined with cabbage hopper & long vegetable hopper	PNC 650036
• 1 of Lever feed hopper.	PNC 653510

Optional Accessories

• Feed tray to be combined with cabbage hopper & long vegetable hopper	PNC 650036	❑
• Grating Disc Stainless Steel for Parmesan/Chocolate	PNC 650148	❑
• Grating Disc Stainless Steel for Breadcrumbs/Potatoes	PNC 650149	❑
• Grating Disc Stainless Steel 5/64 " (2mm)	PNC 650150	❑
• Grating Disc Stainless Steel 1/8 " (3mm)	PNC 650151	❑
• Grating Disc Stainless Steel 5/32 " (4mm)	PNC 650152	❑
• Grating Disc Stainless Steel 9/32 " (7mm)	PNC 650153	❑
• Grating Disc Stainless Steel 11/32 " (9mm)	PNC 650154	❑
• Mobile stand, stainless steel	PNC 653017	❑
• Dicing Grid Stainless Steel 3/8 " (10mm)	PNC 653051	❑
• Dicing Grid Stainless Steel 5/8 " (16mm)	PNC 653052	❑


Electrolux Professional, Inc.
www.electroluxprofessional.com
4003 Collins Lane Louisville, KY 40245 USA - fax number: 706-447-6228

Electrolux PROFESSIONAL
TR260 Vegetable Slicer - 2 Speed - lever hopper
Vegetable Slicer


• Dicing Grid Stainless Steel 25/32 " (20mm)	PNC 653053	❑
• Dicing Grid Stainless Steel 31/32 " (25mm)	PNC 653054	❑
• Dicing Grid Stainless Steel 1 1/4 " (32mm)	PNC 653055	❑
• Slicing Disc Stainless Steel 5/64 " (2mm)	PNC 653172	❑
• Slicing Disc Stainless Steel 1/8" (3mm)	PNC 653173	❑
• Slicing Disc Stainless Steel 1/32" (1mm)	PNC 653188	❑
• Slicing Disc Stainless Steel 3/16" (5mm)	PNC 653189	❑
• Slicing Disc Stainless Steel 1/4" (6mm)	PNC 653190	❑
• Slicing Disc Stainless Steel 5/16" (8mm)	PNC 653191	❑
• Slicing Disc Stainless Steel 3/8" (10mm)	PNC 653192	❑
• Slicing Disc Stainless Steel 5/8" (16mm)	PNC 653193	❑
• Julienne Disc Stainless Steel 5/64 " (2mm)	PNC 653195	❑
• Julienne Disc Stainless Steel 1/8" (3mm)	PNC 653196	❑
• Julienne Disc Stainless Steel 5/32 " (4mm)	PNC 653197	❑
• Julienne Disc Stainless Steel 1/4" (6mm)	PNC 653198	❑
• Julienne Disc Stainless Steel 5/16 " (8mm)	PNC 653199	❑
• Julienne Disc Stainless Steel 3/8 " (10mm)	PNC 653200	❑
• Blade rack, stainless steel	PNC 653212	❑
• Krinkle Cut Disc Stainless Steel 5/64 " (2mm)	PNC 653217	❑
• Krinkle Cut Disc Stainless Steel 1/8 " (3mm)	PNC 653218	❑
• Krinkle Cut Disc Stainless Steel 1/4 " (6mm)	PNC 653219	❑
• Dicing Grid Stainless Steel 15/32 " (12mm)	PNC 653301	❑
• Lever feed hopper.	PNC 653510	❑

Vegetable Slicer
TR260 Vegetable Slicer - 2 Speed - lever hopper

Front

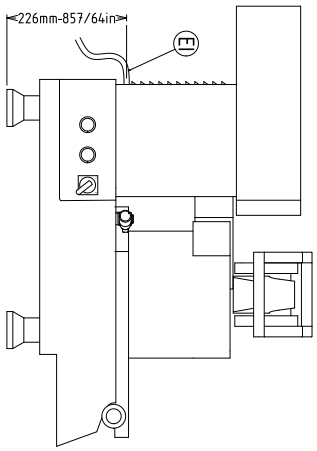


Side

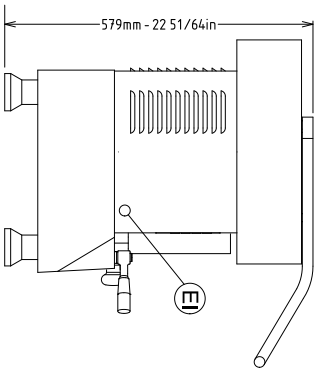

EI = Electrical connection

Top

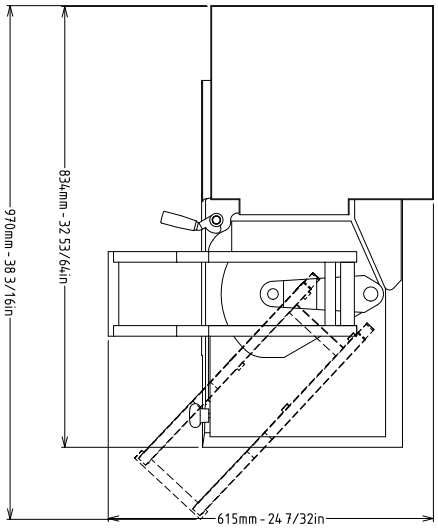

Electric

Supply voltage:	208-240 V/3 ph/60 Hz
Total Watts:	2 kW
Plug type:	USA NEMA L15-20P

Key Information:

External dimensions, Width:	29 1/2" (750 mm)
External dimensions, Depth:	14 15/16" (380 mm)
External dimensions, Height:	18 1/8" (460 mm)
Shipping width:	31 1/2" (800 mm)
Shipping depth:	19 11/16" (500 mm)
Shipping height:	47 1/4" (1200 mm)
Shipping weight:	146 lbs (66 kg)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.