



**Electrolux**  
PROFESSIONAL

## PLUS - Static Preparation 1200 mm Sink Cupboard with 1 Bowl - Left Drainer

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



134134 (GLG1216SXP)

Sink Cupboard with 1 bowl  
and left-hand drainer,  
1200mm

### Short Form Specification

#### Item No. \_\_\_\_\_

Enhanced stability and solid construction thanks to the welded frame and legs. The 50mm high worktop in 304 AISI stainless steel, with Scotch Brite finishing 10/10 mm in thickness, has anti-drip edges, welded corners and overflow rim along the top. Welded and polish sink bowl in 304 AISI stainless steel supplied with overflow pipe and 2" drain hole. Upstand h=100mm with 10mm radius corner covered on the back with AISI 304 stainless steel spot welded profile. Square section legs and height adjustable feet (-20 +30 mm) in 304 AISI stainless steel. 40 mm-thick lower welded shelf in AISI 304 stainless steel slots easily into place at a height of 200 mm from the floor (compulsory to install the chest of drawers). Square section legs and height adjustable feet (-20 +30 mm) in 304 AISI stainless steel.

### Main Features

- Enhanced stability and solid construction. Stability, loading and stress tests by external certified body.
- Product range suitable for international tenders requirements for intense usage installations.

### Construction

- Welded frame and legs.
- Worktop with 50mm high profile, is in stainless steel Scotch Brite finishing, 10/10 in thickness with anti-drip edges and welded corners and overflow rim along the top.
- Constructed entirely in 304 AISI stainless steel.
- Sink bowl is sound-deadened, in polish stainless steel overflow pipe and 2" drain hole.
- Drainers are sound-deadened with stainless steel reinforcement bars.
- Upstand back completely covered with Stainless Steel welded profile.
- Door sliding system is fluent and reliable, tested with over 80.000 cycles by external certified body.
- Sliding doors are in stainless steel and double-walled with sound-deadening material inside. They are 7/10mm in thickness with roll bearings and end limit stop.
- Cupboard interior has easy access thanks to completely openable doors.
- Base panel has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement.
- Height-adjustable stainless steel feet (-20/+30mm).

### Optional Accessories


- Double plastic drain syphon 2 PNC 850022 ☐  
" for sinks
- Set of 4 wheels (2 with brake), PNC 855207 ☐  
diameter=125mm
- Single plastic drain syphon 2 PNC 895313 ☐  
" for Sinks

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

**PLUS - Static Preparation**  
**1200 mm Sink Cupboard with 1 Bowl**  
**- Left Drainer**

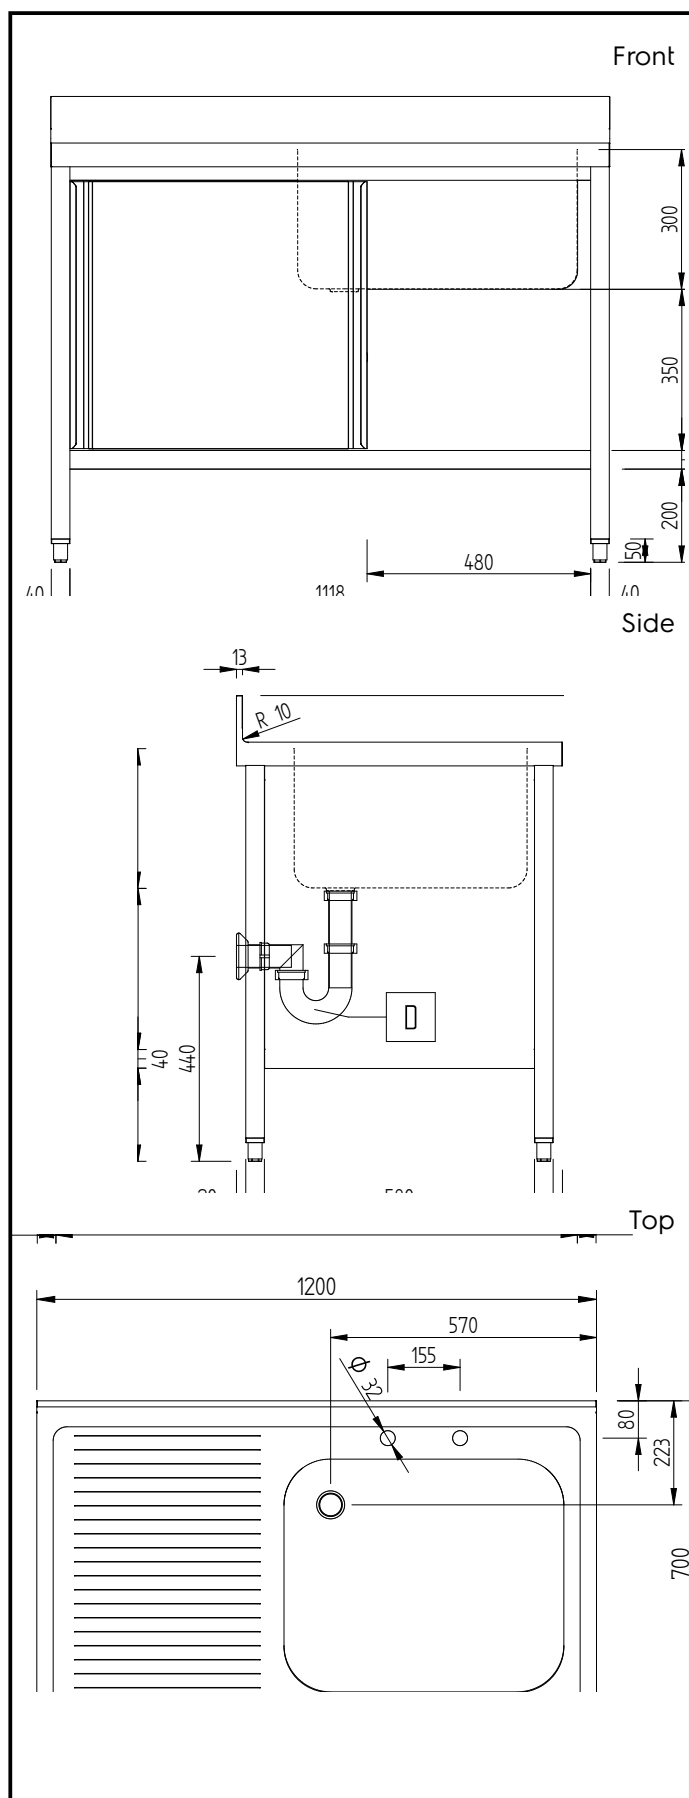

### Key Information:

|                                     |              |
|-------------------------------------|--------------|
| <b>External dimensions, Width:</b>  | 1200 mm      |
| <b>134134 (GLG1216SXP)</b>          |              |
| <b>External dimensions, Depth:</b>  | 700 mm       |
| <b>External dimensions, Height:</b> | 1000 mm      |
| <b>Upstand Dimensions, Height:</b>  | 100 mm       |
| <b>Upstand Dimensions, Depth:</b>   | 13 mm        |
| <b>Upstand Dimensions, Radius:</b>  | R=10         |
| <b>Bowls number</b>                 | 1            |
| <b>Bowl dimensions</b>              | 600x500xH300 |
| <b>Worktop thickness:</b>           | 50 mm        |
| <b>Net weight:</b>                  | 47 kg        |

**PLUS - Static Preparation**  
**1200 mm Sink Cupboard with 1 Bowl - Left Drainer**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.