

# Modular Preparation 1200 mm Work Top with Upstand

TEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



121138 (TPLA12A)

Work Top with upstand 1200mm

## **Short Form Specification**

#### Item No.

The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front profile, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 900mm.

#### **Main Features**

- Special shaped front and rear profiles without burrs to avoid water leakage on modules below.
- Extremely easy to clean thanks to the large and smooth seamless surface with Scotch-Brite finishing.

#### Construction

- 304 AISI stainless steel worktop (CrNi 18/10) 40 mm high, 15/10 (16 gauges) thickness.
- 18mm under panel made of sound deadening material according to E1 European specifications.
- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- For a work height of 900 mm, worktops can be mounted on: solid bracket, solid bracket plus 50x50mm legs, 710 mm ambient, hot, refrigerated or freezer units with hinged doors or telescopic drawers, placed on oversized (65x65mm) or 150mm high feet (0/+90mm adjustable in height).
- Fully welded and polished corners.
- 100 mm boxed heavy duty splashback with a 45° degrees top angle, folded directly from the worktop, has fully welded sides and rear part completely covered by stainless steel profile to avoid water spillage on modules below.

#### **Optional Accessories**


Optional Accessories		
<ul> <li>Double plastic drain syphon 2         " for sinks     </li> </ul>	PNC 850022 [	
<ul> <li>Drop-in soaking unit 800x500x350mm</li> </ul>	PNC 855216	
<ul> <li>Single plastic drain syphon 1,5</li> <li>for work tables with bowl</li> </ul>	PNC 855306 [	_
<ul> <li>Drop-in Bowl and right-hand drainage 400x400x200mm</li> </ul>	PNC 855800 [	_
Drop-in Bowl and right-hand drainage 600x500x250mm	PNC 855801	
• Side upstand, h=100mm	PNC 855802 [	
Bowl Skirting (400x400x200) for cantilever execution	PNC 855806 [	
<ul> <li>Bowl Skirting (600x500x250) for cantilever execution</li> </ul>	PNC 855807 [	
<ul> <li>Bowl Skirting (2x600x500x250) for cantilever execution</li> </ul>	PNC 855808 [	_
Stainless steel square tube wall bracket	PNC 855814 [	_
<ul> <li>Stainless steel wall bracket with squared leg 50x50mm</li> </ul>	PNC 855815	
Drop-in Bowl and left-hand drainage 400x400x200mm	PNC 855816	_
Drop-in Bowl and left-hand drainage 600x500x250mm	PNC 855817	
False bottom for right hand 600x500mm Bowl	PNC 895100	
<ul> <li>False bottom for left hand 600x500mm Bowl</li> </ul>	PNC 895110	
• Single plastic drain syphon 2" for Sinks	PNC 895313	_

#### APPROVAL:





# Modular Preparation 1200 mm Work Top with Upstand

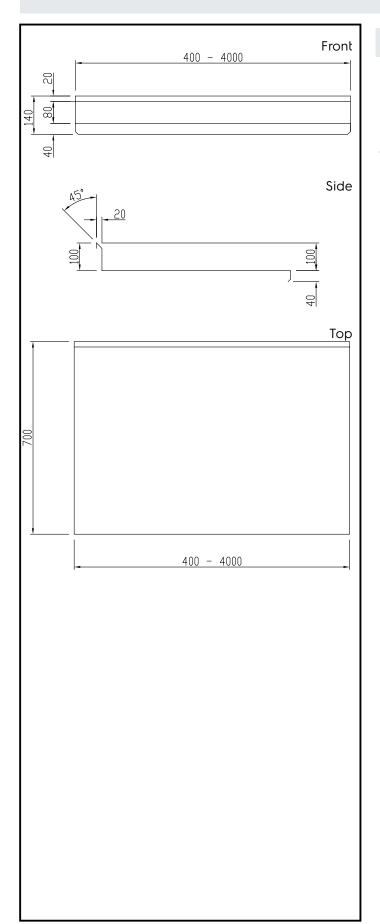

## **Key Information:**

External dimensions, Width:

121138 (TPLA12A)1200 mmExternal dimensions, Depth:700 mmExternal dimensions, Height:140 mmUpstand Dimensions, Height:100 mmUpstand Dimensions, Radius:90°Worktop thickness:40 mmNet weight:41 kg

Modular Preparation 1200 mm Work Top with Upstand