



Standard Preparation 1200 mm Soaking Sink for Dishwasher with 1 Bowl



133194 (NSBD1417L)

Sink Unit for Undercounter
Dishwasher with 1 bowl
600x500x320mm and left
hand drainer, 1400mm

Short Form Specification

Item No.

Made from 304 AISI stainless steel. The 50mm high worktop in 304 AISI stainless steel, 1mm in thickness, is sound-deadened and has an overflow rim and welded corners. Integral rear upstand, h=100mm, with 10mm radius. Allround apron. Square section legs 40x40mm on 1" height-adjustable feet (+/-20mm). Bowl mm600x500x300h with overflow pipe and 2"drain hole; left hand drainer. An undercounter dishwasher can be placed under the drainer.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Sturdiness, stability and reliability of table accurately tested.

Construction

- Sink tops easily slotted onto the legs and taps are easily installed from the rear.
- Square section legs and 40 mm height-adjustable feet in 304 AISI stainless steel.
- 100 mm upstand with 8 mm radiused corner and 13 mm deep, designed to be used against a wall.
- 50 mm worktop in 304 AISI stainless steel, 10/10 in thickness with overflow rim along the top.
- Bottom part of drain left free to house an undercounter dishwasher.
- Wide range of taps are available to suit every need.
- Drainage area suitable for drying operations
- 100 mm upstand with 10 mm radiused corner and 13 mm deep, designed to be used against a wall.

Optional Accessories

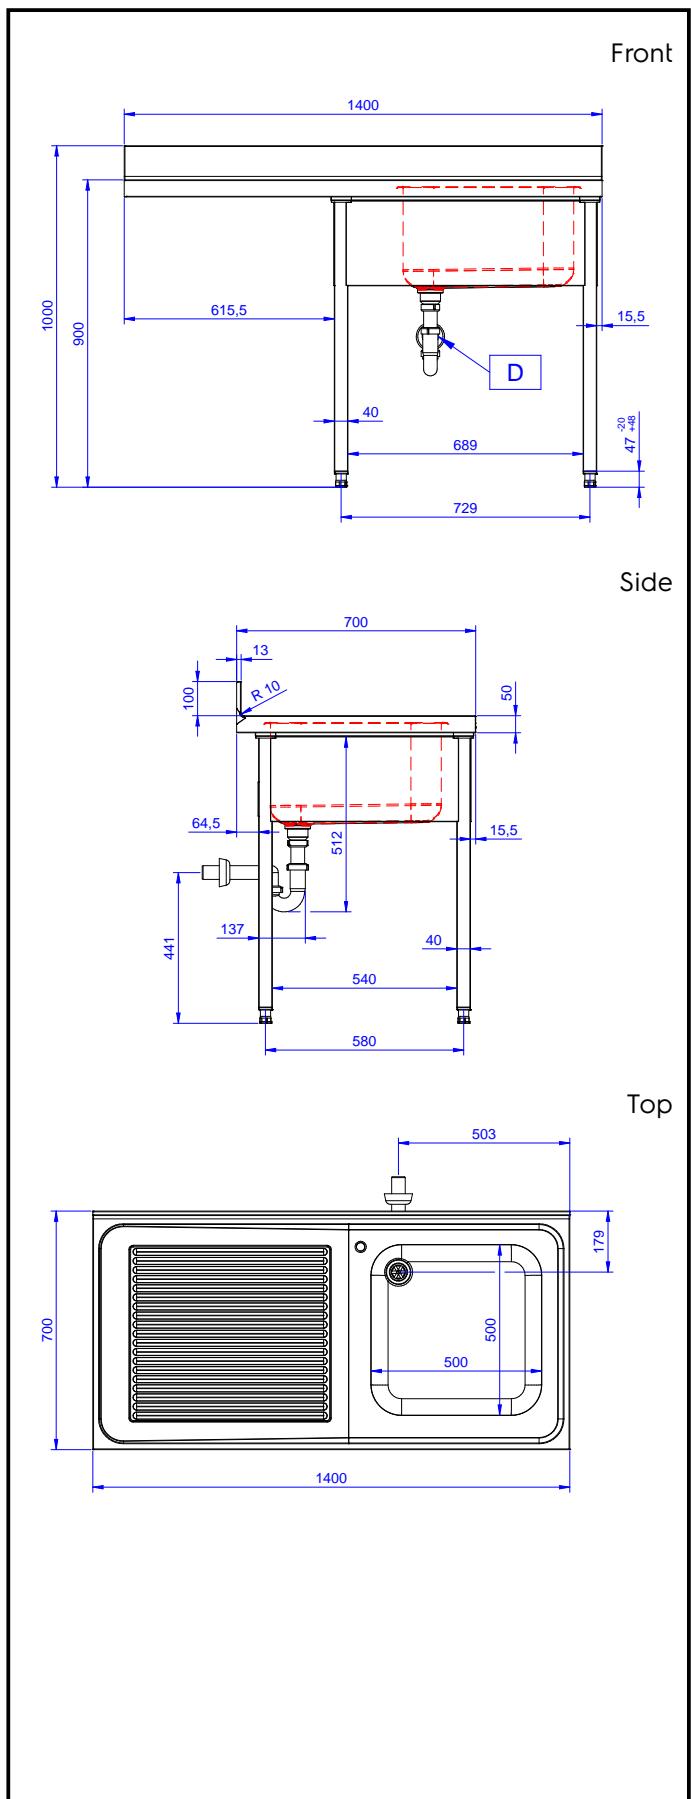
- Set of 4 wheels (2 with brake) PNC 855150 d. 100mm for tables and sinks (total height on wheels= 993 mm)
- Elbow operated mixer tap with PNC 855322 spout 3/4", single hole
- Elbow operated mixer tap with PNC 855323 short spout 3/4", single hole
- Foot operated mixer tap (hot and cold) with spout 3/4" PNC 855328
- Lower shelf for 800 mm tables PNC 855363 and sinks
- Elbow operated mixer tap with PNC 855374 spout, 3/4" single hole
- Elbow operated mixer tap with PNC 855375 short spout, 3/4" single hole
- Single hole deck mounted PNC 855382 mixing temperature monoblock faucet
- Single hole deck mounted PNC 855383 extra robust pot filling mixing temperature faucet
- Single hole deck mounted PNC 855384 mixing temperature faucet with short spout
- Single hole deck mounted PNC 855385 mixing temperature pre-rinse unit
- Single hole deck mounted PNC 855386 elbow operated mixing temperature faucet with pre-rinse unit
- Single hole deck mounted PNC 855387 riser add-on mixing temperature faucet with pre-rinse unit

APPROVAL:



Experience the Excellence
www.electroluxprofessional.com

- Single hole deck mounted elbow operated mixing temperature faucet with short pre-rinse unit PNC 855388
- Single hole deck mounted riser add-on mixing temperature faucet with pre-rinse unit PNC 855389
- Single hole deck mounted mixing temperature faucet with pre-rinse unit PNC 855390
- Floor fastening kit for 2 square legs PNC 865386
- Single plastic drain siphon 2" for Sinks PNC 895313


Key Information:
External dimensions, Width:
133194 (NSBD1417L) 1400 mm

External dimensions, Depth: 700 mm

External dimensions, Height: 1000 mm

Upstand Dimensions, Height: 100 mm

Upstand Dimensions, Depth: 13 mm

Upstand Dimensions, Radius: R=13

Bowls number
Bowl dimensions
Net weight: 60 kg
