Electrolux PROFESSIONAL

Premium Preparation - 1400 mm Sink Unit with 1 Bowl Left drain



ITEM # MODEL # NAME # SIS # AIA

Main Features

• Sturdiness, stability and reliability of table accurately tested.

Construction

- 100 mm upstand with 10 mm radioused corner and 13 mm deep, designed to be used against a wall.
- Round section legs with feet in 304 AISI stainless steel, 50 mm in diameter, adjustable in height by +0/-40 mm.
- 50 mm thick lower shelf, in 304 AISI stainless steel, can be easily slotted into position, 200 mm from the floor.
- Delivered in knock-down package.
- Wide range of taps are available to suit every need.
- Drainage area suitable for drying operations
- Heavy duty construction entirely in AISI 304 stainless steel to offer maximum durability.


Optional Accessories

- Lower shelf for 1400mm for units PNC 855283 🗅
- Set of 4 wheels (2 with brake) d. PNC 855288 □ 100mm
- 3-sided underframe for 1400mm PNC 855291 □ tables
- Elbow operated mixer tap with PNC 855322 spout 3/4", single hole
- Elbow operated mixer tap with short spout 3/4", single hole
 - Foot operated mixer tap (hot PNC 855328 and cold) with spout 3/4"
- Single plastic drain syphon 2" for PNC 895313 Sinks

APPROVAL:



Premium Preparation 1400 mm Sink Unit with 1 Bowl - Left drain

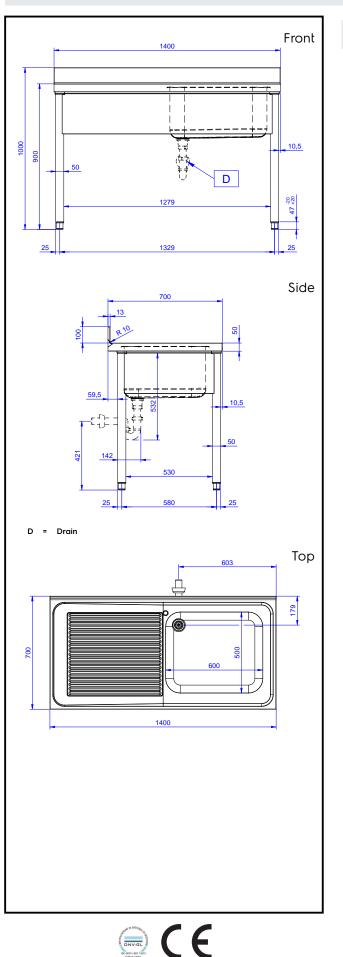

Key Information:

External dimensions, Width:133108 (LG1416SXEN)1400External dimensions, Depth:700 mExternal dimensions, Height:900 mUpstand Dimensions, Height:100 mUpstand Dimensions, Depth:13 mmUpstand Dimensions, Radius:R=10Bowls number1Bowl dimensions600xWorktop thickness:50 mNet weight:46 kg

1400 mm 700 mm 900 mm 100 mm 13 mm R=10 1 600x500xH320 50 mm 46 kg

Premium Preparation 1400 mm Sink Unit with 1 Bowl - Left drain

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.