

**Standard Preparation** 1600 mm Wall Cupboard with 2 Cliding Deere

	Silding Doors	
		Main Fea Handles in reliability. Sturdiness, accurately Construct Wall cupbo an internal different le Easy access guarantee Two double front of the the use of cupboard Sturdy sou located flu 100 mm up 13 mm dee Scotch Bri standards.
132833 (PS1600LCN)	Wall Cupboard with 2 sliding doors, 1600mm	<ul> <li>Lighting k cupboard 1200mm)</li> <li>Lighting k cupboard and 1800r</li> </ul>
Short Form Spec	cification	
Item No.		
from a single bended cleaning. Upturned pane	steel. Back and bottom are made stainless steel sheet for easier el edges. Base shelf and height- shelf. Double-walled sliding doors.	

ITEM #	 	
MODEL #		
NAME #		
SIS #		
AIA #		

### lures

- n stainless steel for better hygiene and
- stability and reliability of table tested.

#### tion

- oard features an ergonomic handle and shelf which can be positioned at three evels.
- ss to the cupboard interior on all lengths d by the use of only 2 doors.
- e-walled sliding doors flush fitting to the e frame can easily be removed without of tools to facilitate cleaning of the interior.
- und-deadened sliding doors on tracks ish to the front of the frame.
- ostand with 10 mm radioused corner and ep, designed to be used against a wall.
- ite finish to meet the highest hygiene

### **I** Accessories

- it with led for wall ds (1000mm and
- tit with led for wall ds (1400mm, 1600mm mm)


PNC 850710 🗅

PNC 850709 🗅

#### APPROVAL:



# Standard Preparation 1600 mm Wall Cupboard with 2 Sliding Doors

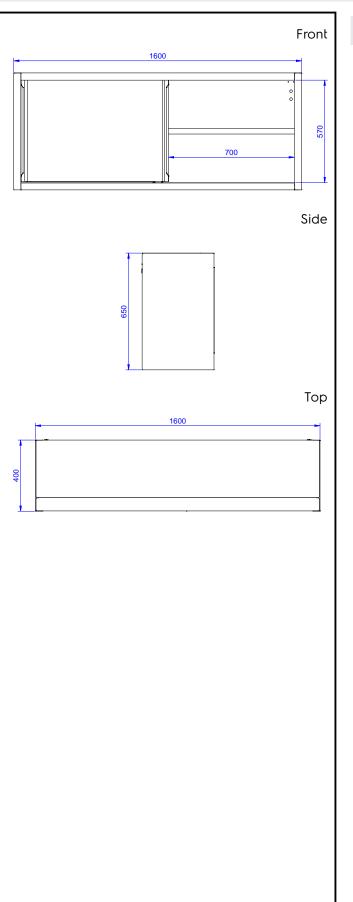

## Key Information:

N° of doors:	
132833 (PS1600LCN)	2
External dimensions, Width:	1600 mm
External dimensions, Depth:	400 mm
External dimensions, Height:	650 mm

#### Standard Preparation 1600 mm Wall Cupboard with 2 Sliding Doors

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.