


Modular Preparation 1700 mm Work Top

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

	 Main Features Special shaped front and rear profiles without burrs to avoid water leakage on modules below. Extremely easy to clean thanks to the large and smooth seamless surface with Scotch-Brite finishing. Construction 304 AISI stainless steel worktop (CrNi 18/10) 40 mm high, 15/10 (16 gauges) thickness. 18mm under panel made of sound deadening material according to EI European specifications. Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges). For a work height of 900 mm, worktops can be mounted on: solid bracket, solid bracket plus 50x50mm legs, 710 mm ambient, hot, refrigerated or freezer units with hinged doors or telescopic drawers, placed on oversized (65x65mm) or 150mm high feet (0/+90mm adjustable in height). Fully welded and polished corners.
	Optional Accessories Orop-in soaking unit PNC 855216
	800x500x350mm ■ Side upstand, h=100mm PNC 855802 □
121121 (TPLA17) Work Top 1700mm	Stainless steel square tube wall PNC 855814 bracket
	 Stainless steel wall bracket with PNC 855815 squared leg 50x50mm
Short Form Specification	
Item No.	
The 40mm high worktop in 304 AISI stainless steel, incorr an 18mm under panel made of sound deadening materia and rear longitudinal stainless steel c-channel reinford Special shaped front and rear profiles, without burrs, to water leakage. Fully welded and shapely polished corner tops can be mounted on brackets, legs or bases in co obtain a work height of 900mm.	al. Front cement. o avoid rs. Work



Modular Preparation 1700 mm Work Top

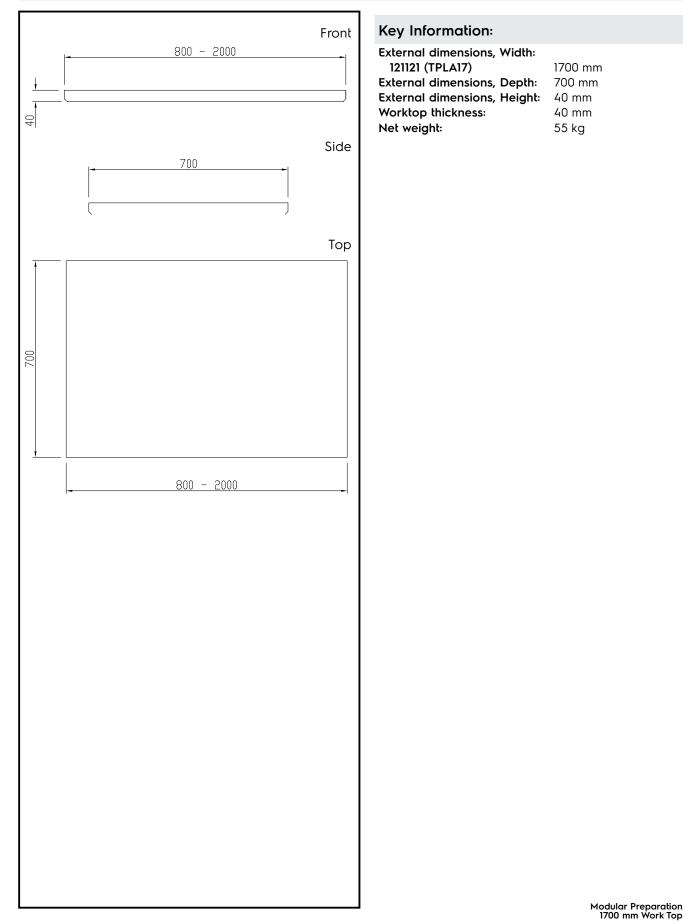

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.