



Electrolux
PROFESSIONAL

**PLUS - Static Preparation
1800 mm Wall Cupboard with 2
Sliding Doors**


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

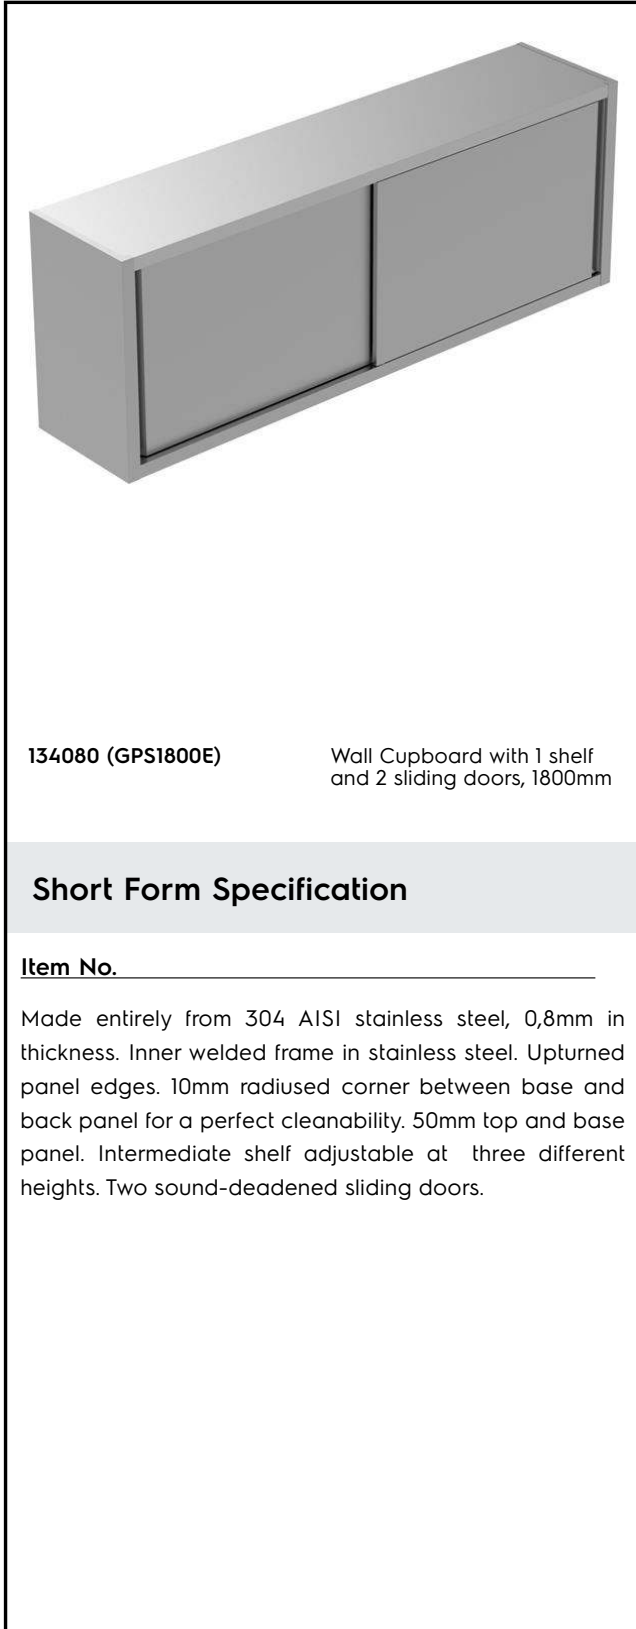

134080 (GPS1800E)

Wall Cupboard with 1 shelf
and 2 sliding doors, 1800mm

Short Form Specification

Item No. _____

Made entirely from 304 AISI stainless steel, 0,8mm in thickness. Inner welded frame in stainless steel. Upturned panel edges. 10mm radiused corner between base and back panel for a perfect cleanability. 50mm top and base panel. Intermediate shelf adjustable at three different heights. Two sound-deadened sliding doors.

Main Features

- Enhanced stability and solid construction. Stability, loading and stress tests by external certified body.
- Product range suitable for international tenders requirements for intense usage installations.


Construction

- Door sliding system is fluent and reliable, tested with over 80.000 cycles by external certified body.
- Constructed entirely in 304 AISI stainless steel.
- Sliding doors are in stainless steel and double-walled with sound-deadening material inside. They are 7/10mm in thickness with roll bearings and end limit stop.
- Cupboard interior has easy access thanks to completely openable doors.
- Intermediate shelf has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement. It can be positioned at three different heights.
- Base panel has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement.

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

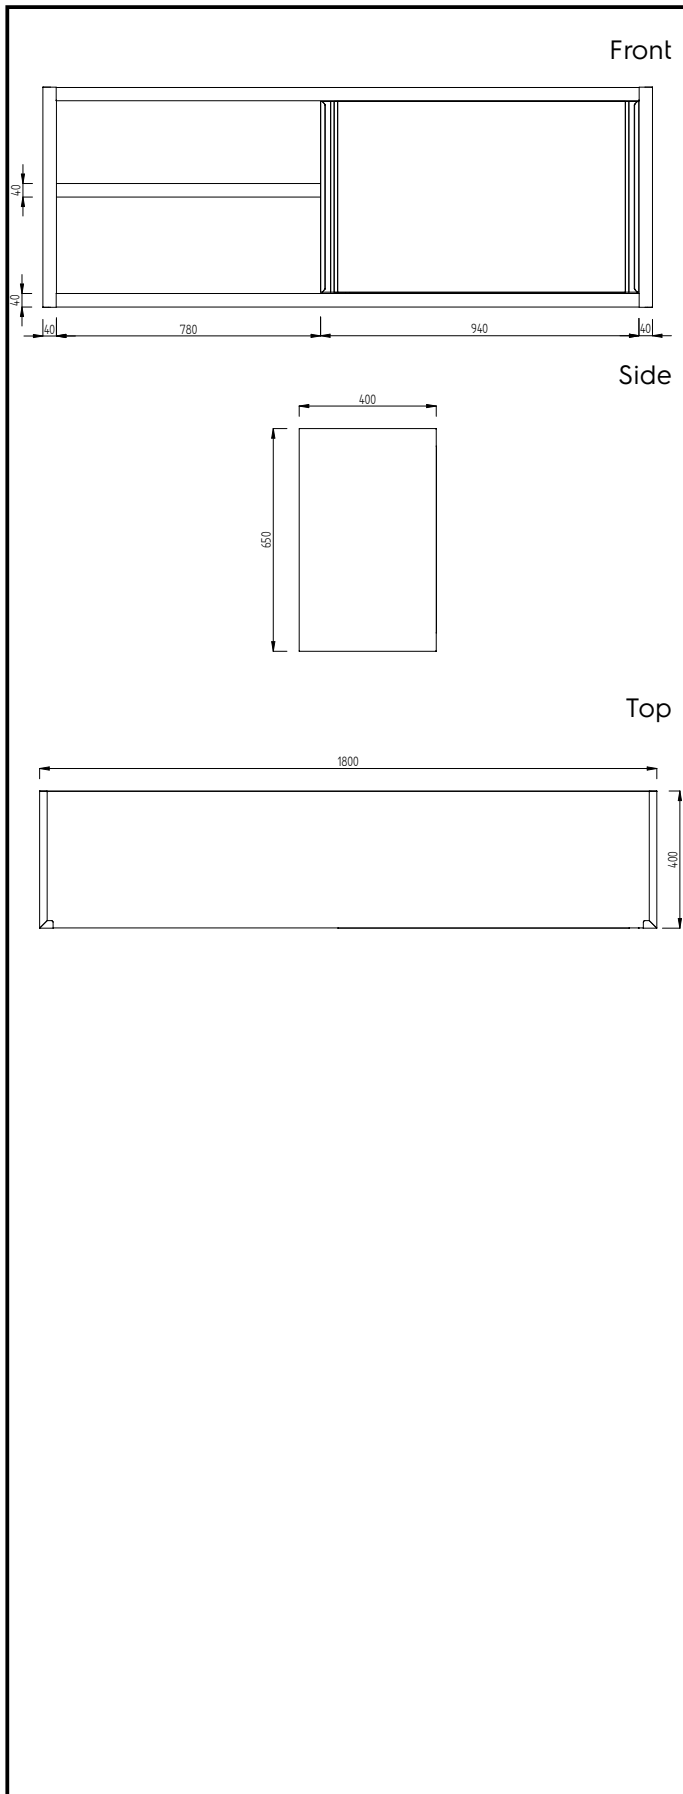

Key Information:

| | | |
|-------------------------------------|---------|--|
| Cabinet width: | | |
| 134080 (GPS1800E) | 1720 mm | |
| Cabinet depth: | 360 mm | |
| Cabinet height: | 580 mm | |
| N° of doors: | 2 | |
| External dimensions, Width: | 1800 mm | |
| External dimensions, Depth: | 400 mm | |
| External dimensions, Height: | 650 mm | |
| Net weight: | 50 kg | |