


Standard Preparation 2000 mm Cupboard Sink with 2 Bowls & Right Drain

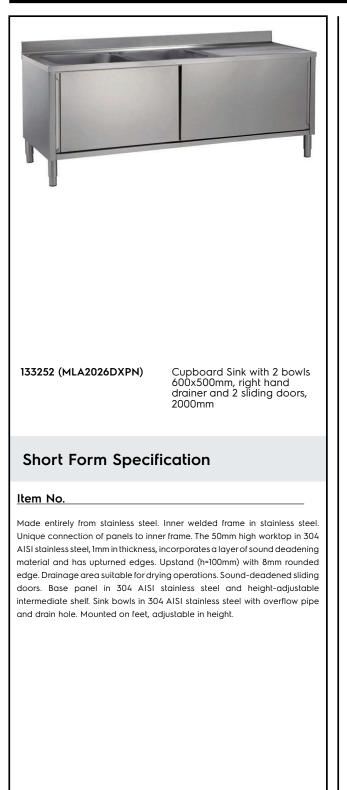

Construction


- Inner welded frame in stainless steel to guarantee superior strength and stability.
- Easy access to the cupboard interior on all lengths guaranteed by the use of only 2 doors.
- Sink bowl in 304 AISI stainless steel, supplied with overflow drain pipe and drain hole.
- 50 mm worktop in 304 AISI stainless steel with upturned edges, incorporates an 18 mm layer of sound deadening material.
- Reinforced side and base panel in 304 AISI stainless steel.
- 100 mm upstand with 8 mm radioused corner and 13 mm deep, designed to be used against a wall.
- 304 AISI stainless steel feet, 200 mm high and 54 mm in diameter, adjustable by -50/+30 mm.
- Sturdy sound-deadened sliding doors on tracks located flush to the front of the frame.
- Drainage area suitable for drying operations
- Heavy duty Stainless steel construction.

Optional Accessories

- False bottom for right hand PNC 895100 600x500mm Bowl
- Overflow filter for bowl (H=180 PNC 895130 mm)
- Overflow filter for bowl (H=230 PNC 895131 mm)
- Overflow filter for bowl (H=330 PNC 895132 mm)

APPROVAL:

Electrolux PROFESSIONAL

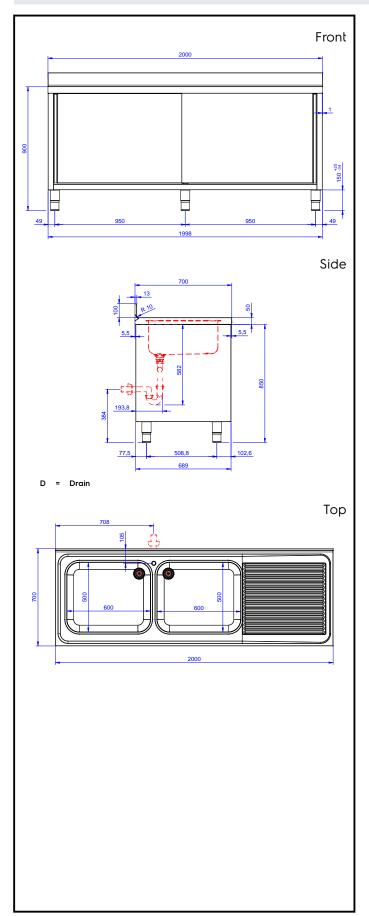

Standard Preparation 2000 mm Cupboard Sink with 2 Bowls & Right Drain

Drain:

Drain:	
Drainer position:	Right to left
Key Information:	
Cabinet width:	1910 mm
Cabinet depth:	645 mm
Cabinet height:	330 mm
External dimensions, Width:	2000 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	1000 mm
Upstand Dimensions, Height:	100 mm
Upstand Dimensions, Depth:	13 mm
Upstand Dimensions, Radius:	R=8
Bowls number	2
Bowl dimensions	600x500xH300
Number and type of doors:	2 Sliding
Worktop thickness:	50 mm
Net weight:	75 kg

Standard Preparation 2000 mm Cupboard Sink with 2 Bowls & Right Drain

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.