

## PLUS - Static Preparation 2000 mm Worktop Cupboard with Upstand

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**134038 (GTN2010E)**

 WorkTop Cupboard with 1  
shelf, 2 sliding doors and  
upstand, 2000mm

### Short Form Specification

#### Item No. \_\_\_\_\_

Enhanced stability and solid construction thanks to the welded frame and legs. The 50mm high worktop in 304 AISI stainless steel, with Scotch Brite finishing 15/10 mm in thickness, has anti-drip edges and welded corners. 18mm thick undertop waterproof reinforcement, it's completely waterproof, double-sided laminated and 100% recyclable. Sound-deadened double walled sliding doors on roll bearings with end limit stop (7/10 in thickness in 304 AISI stainless steel). Upstand h=100mm with 10mm radius corner covered on the back with AISI 304 stainless steel spot welded profile. 40mm intermediate shelf (8/10 in thickness) can be positioned at three different heights. Base panel in AISI 304 stainless steel (8/10 in thickness) with upturned edges reinforced by stainless steel AISI 304 bars. Welded to the legs for further structure reinforcement. Height adjustable feet (-20/+30 mm) in 304 AISI stainless steel.

### Main Features

- Enhanced stability and solid construction. Stability, loading and stress tests by external certified body.
- Product range suitable for international tenders requirements for intense usage installations.

### Construction

- Welded frame and legs.
- Worktop with 50 mm high profile, in s/s Scotch Brite finishing, 15/10 in thickness with anti-drip edges and welded corners.
- Constructed entirely in 304 AISI stainless steel.
- Undertop is 18mm in thickness, reinforced, completely waterproof, double-sided laminated and 100% recyclable.
- Upstand back completely covered with Stainless Steel welded profile.
- Doorsliding system is fluent and reliable, tested with over 80.000 cycles by external certified body.
- Sliding doors are in stainless steel and double-walled with sound-deadening material inside. They are 7/10mm in thickness with roll bearings and end limit stop.
- Cupboard interior has easy access thanks to completely openable doors.
- Intermediate shelf has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement. It can be positioned at three different heights.
- Base panel has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement. It is welded to legs for further structure reinforcement.
- Height-adjustable stainless steel feet (-20/+30mm).

### Optional Accessories

- Set of 4 wheels (2 with brake), PNC 855207 ☐ diameter=125mm

APPROVAL: \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## PLUS - Static Preparation 2000 mm Worktop Cupboard with Upstand

### Key Information:

|                              |            |
|------------------------------|------------|
| Adjustable Feet              |            |
| 134038 (GTN2010E)            | -20/+30 mm |
| Cabinet width:               | 1918 mm    |
| Cabinet depth:               | 580 mm     |
| Cabinet height:              | 580 mm     |
| External dimensions, Width:  | 2000 mm    |
| External dimensions, Depth:  | 700 mm     |
| External dimensions, Height: | 1000 mm    |
| Upstand Dimensions, Height:  | 100 mm     |
| Upstand Dimensions, Depth:   | 13 mm      |
| Number and type of doors:    | 2 Sliding  |
| Worktop thickness:           | 50 mm      |
| Net weight:                  | 105 kg     |

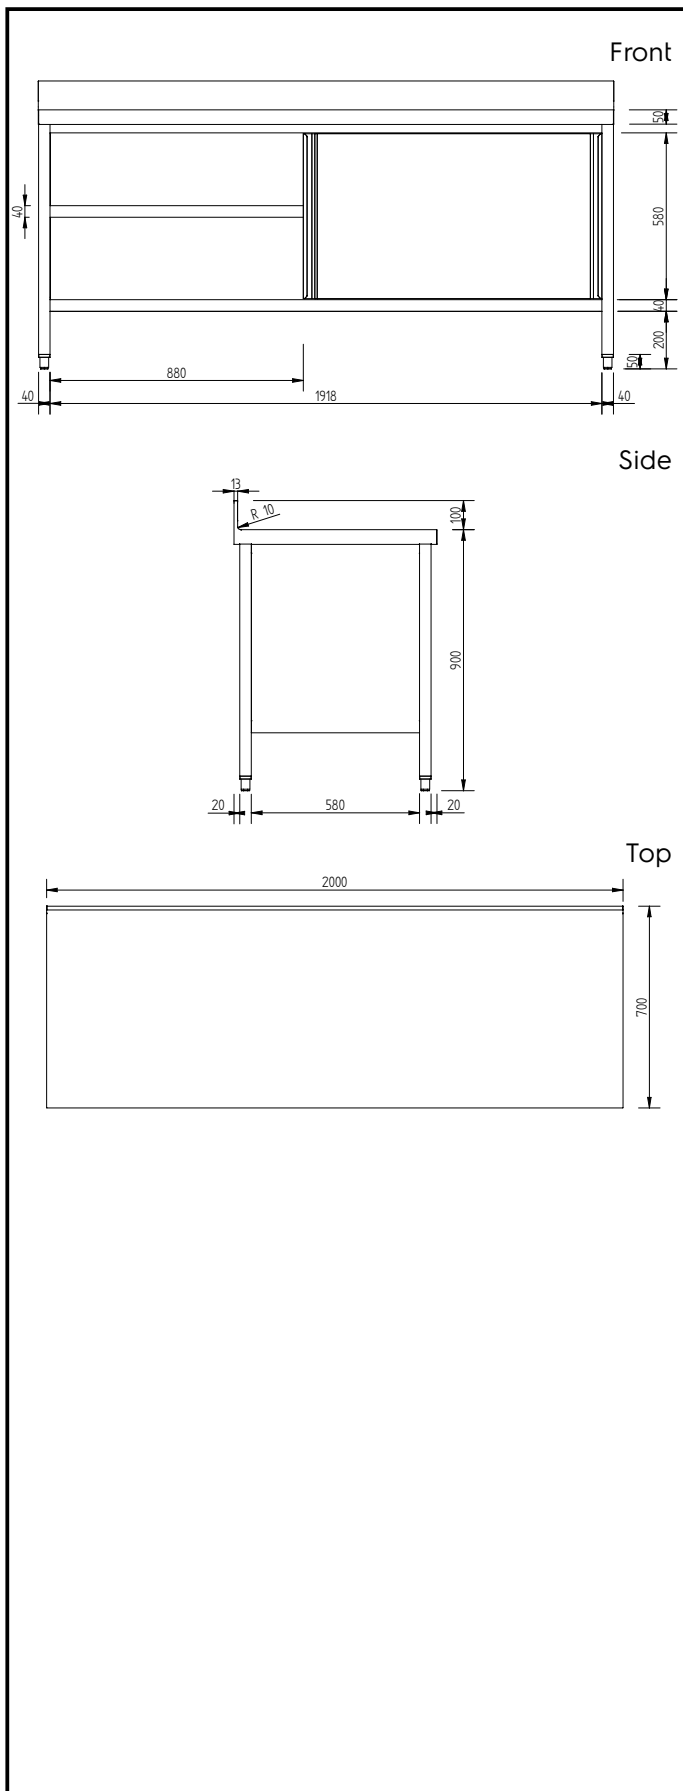

PLUS - Static Preparation  
2000 mm Worktop Cupboard with Upstand

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.08.05