

Ice Cuber 21kg/24h with 4kg bin - Air-cooled

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


730240 (FGC24AB)

 Air cooled ice cycler
 21kg/24h, 4kg ice collection
 bin included

Short Form Specification

Item No. _____

Plastic flap on the front, top and sides in 304 AISI stainless steel.

The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation. R452A refrigerant. Container capacity Kg: 4.

Main Features


- Compliant to CE requirements for safety.
- Efficient air or water cooling system.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only.
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Compact dimensions of the ice cyclers make them highly suitable for any location, particularly those where space is at a premium.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Model available in air-cooled version.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.

Construction


- Easy access to the main components for maintenance.
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- 5mm feet.
- Internal ice cubes container in ABS.
- Environmentally friendly: R452a as refrigerant gas.

APPROVAL: _____

Front

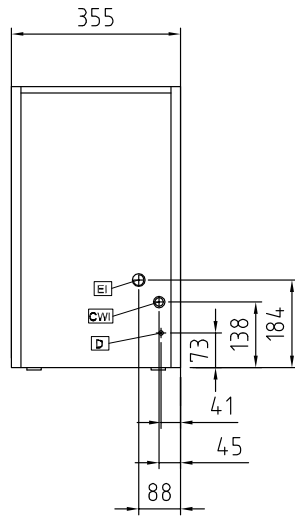


Side

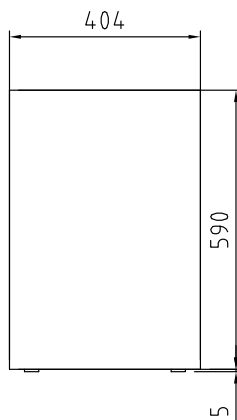

CWI = Cold Water inlet 1 (cleaning)
 D = Drain
 EI = Electrical inlet (power)

Top

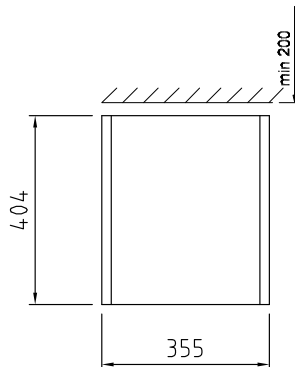

Electric

Supply voltage:

730240 (FGC24AB) 220-240 V/1N ph/50 Hz

Electrical power max.:

0.32 kW

Capacity:

Bin capacity:

4 kg

Key Information:

External dimensions, Width: 345 mm

External dimensions, Depth: 400 mm

External dimensions, Height: 595 mm

Net weight: 28 kg

Output: 21 kg/day

Kind of cube: Ice cube 13 g

Sustainability

Refrigerant type:

R452A