Electrolux

SkyLine PremiumS Electric Combi Oven 10GN1/1, Green Version with IOT Module



229718 (ECOE101T3AT)

SkyLine PremiumS Combi Boiler Oven with touch screen control, 10x1/1GN, electric, 3 cooking modes (automatic, recipe program, manual), automatic cleaning, Green Version with 3-glass door and IOT module

Short Form Specification

Item No.

Combi oven with high resolution full touch screen interface, multilanguage - Built-in steam generator with real humidity control based upon Lambda Sensor - OptiFlow air distribution system to achieve maximum performance with 7 fan speed levels

- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator, 5 gutomatic cycles (soft, medium, strong, extra strong, rinseonly) and green functions to save energy, water, detergent and rinse aid

- Cooking modes: Automatic (9 food families with 100+ different pre-installed variants); Programs (a maximum of 1000 recipes can be stored and organized in 16 different categories); Manual (steam, combi and convection cycles); Specialistic Cycles (regeneration, Low Temperature Cooking, proving, EcoDelta, Sous-Vide, Static-Combi, Pasteurization of pasta, dehydration, Food Safe Control and Advanced Food Safe Control)

- Special functions: MultiTimer cooking, Plan-n-Save to cut running costs, Make-it-Mine to customize interface, SkyHub to customize homepage, agenda MyPlanner, SkyDuo connection to SkyLine ChillerS, automatic backup mode to avoid downtime

- USB port to download HACCP data, programs and settings. Connectivity ready - 6-point multi sensor core temperature probe
- Triple-glass door with double LED lights line
- Stainless steel construction throughout
- Supplied with n.1 tray rack 1/1GN, 67mm pitch

- Connectivity ready: enables real time to the appliance, possibility to share recipes and monitor information, such as status, statistics, HACCP data and consumptions, and receive service alerts.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Built-in steam generator for highly precise humidity and temperature control according to the chosen settinas
- Real humidity control based upon Lambda Sensor to automatically recognize quantity and size of food for consistent quality results.
- Dry, hot convection cycle (25 °C 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C 300 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C 99 °C): ideal for sous-vide, re-thermalization and delicate cookina. Steam cycle (100 °C): seafood and vegetables.

High temperature steam (25 °C - 130 °C).

Automatic mode including 9 food families (meat, poultry, fish, vegetables, pasta/rice, eggs, savory and sweet bakery, bread, dessert) with 100+ different pre-installed variants. Through Automatic Sensing Phase the oven optimizes the cooking process according to size, quantity and type of food loaded to achieve the selected cooking result. Real time overview of the cooking parameters. Possibility to personalize and save up to 70 variants per family.

Cycles+: - Regeneration (ideal for banqueting on plate or rethermalizing on tray),

- Low Temperature Cooking (to minimize weight loss and maximize food quality) Patented US7750272B2 and related family,

- Proving cycle,

EcoDelta cooking, cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber,

- Sous-vide cooking,

- Static Combi (to reproduce traditional cooking from static oven),

- Pasteurization of pasta,

Dehydration cycles (ideal for drying fruits, vegetables, meats, seafood),

 Food Safe Control (to automatically monitor safety of cooking process in compliance with HACCP hygienic standards) Patented US6818865B2 and related family, - Advanced Food Safe Control (to drive the cooking

with pasteurization factor).

- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- MultiTimer function to manage up to 20 different cooking cycles at the same time, improving flexibility and ensuring excellent cooking results. Can be saved up to 200 MultiTimer programs.
- Fan with 7 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- Automatic fast cool down and pre-heat function.

APPROVAL:





• Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).

- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Capacity: 10 GN 1/1 trays.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness and temperature control thanks to a special design of the chamber.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (connectivity accessory kit included).

Construction

- Triple thermo-glazed door with 2 hinged inside panels for easy cleaning and double LED lights line.
- Hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- Integrated spray gun with automatic retracting system for fast rinsing.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

User Interface & Data Management

- High resolution full touch screen interface (translated in more than 30 languages) - color-blind friendly panel.
- Pictures upload for full customization of cooking cycles.
- Make-it-mine feature to allow full personalization or locking of the user interface.
- SkyHub lets the user group the favorite functions in the homepage for immediate access.
- MyPlanner works as an agenda where the user can plan the daily work and receive personalized alerts for each task.
- With SkyDuo the Oven and the Blast Chiller are connected to each other and communicate in order to guide the user through the cook&chill process optimizing time and efficiency (requires optional accessory).
- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plugin sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Trainings and guidances supporting materials easily accessible by scanning QR-Code with any mobile device.
- Automatic consumption visualization at the end of the cycle.

Sustainability

- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler. Protected by registered design (EM003143551 and related family).
- Reduced powerfunction for customized slow cooking cycles.
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- Plan-n-Save function organizes the cooking sequence of



SkyLine PremiumS Electric Combi Oven 10GN1/1, Green Version with 10T Module

the chosen cycles optimizing the work in the kitchen from a time and energy efficiency point of view.

Energy Star 2.0 certified product.

Included Accessories

	LIGHT medule for One Connected and Studius (and let begind	DNC 000/01	
•	1 of IoT module for OnE Connected and SkyDuo (one IoT board per appliance - to connect oven to blast chiller for Cook&Chill	PNC 922421	
	process).		
0	ptional Accessories		
•	External reverse osmosis filter for single tank Dishwashers with	PNC 864388	
	atmosphere boiler and Ovens		_
•	Water filter with cartridge and flow meter for low steam usage (less than 2 hours of full steam per day)	PNC 920004	
•	Water filter with cartridge and flow meter for medium steam usage	PNC 920005	
•	Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the	PNC 922003	ū
	disassembled one)		
•	Pair of AISI 304 stainless steel grids, GN 1/1	PNC 922017	
•	Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922036	
•	AISI 304 stainless steel grid, GN 1/1	PNC 922062	
:	Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2	PNC 922086	
•	External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)	PNC 922171	L L
•	Baking tray for 5 baguettes in perforated aluminum with silicon	PNC 922189	
	coating, 400x600x38mm		
•	Baking tray with 4 edges in perforated aluminum, 400x600x20mm		
•	Baking tray with 4 edges in aluminum, 400x600x20mm	PNC 922191	
•	Pair of frying baskets	PNC 922239	
•	AISI 304 stainless steel bakery/pastry grid 400x600mm	PNC 922264 PNC 922265	
:	Double-step door opening kit Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922266	
	USB probe for sous-vide cooking	PNC 922281	ū
•	Grease collection tray, GN 1/1, H=100 mm	PNC 922321	_
•	Kit universal skewer rack and 4 long skewers for Lenghtwise ovens		
•	Universal skewer rack	PNC 922326	
•	4 long skewers	PNC 922327	
•	Multipurpose hook	PNC 922348	
•	4 flanged feet for 6 & 10 GN , 2", 100-130mm	PNC 922351	
•	Grid for whole duck (8 per grid - 1,8kg each), GN 1/1	PNC 922362	
•	Thermal cover for 10 GN 1/1 oven and blast chiller freezer	PNC 922364	
:	Tray support for 6 & 10 GN 1/1 disassembled open base Wall mounted detergent tank holder	PNC 922382 PNC 922386	
•	USB single point probe	PNC 922390	ū
•	Connectivity router (WiFi and LAN)	PNC 922435	ū
•	Grease collection kit for ovens GN 1/1 & 2/1 (2 plastic tanks,	PNC 922438	
	connection valve with pipe for drain)		_
•	SkyDuo Kit - to connect oven and blast chiller freezer for Cook&Chill process. The kit includes 2 boards and cables. Not for	PNC 922439	
	OnE Connected		
•	Tray rack with wheels 10 GN 1/1, 65mm pitch	PNC 922601	
•	Tray rack with wheels, 8 GN 1/1, 80mm pitch	PNC 922602	
•	Bakery/pastry tray rack with wheels holding 400x600mm grids for 10 GN 1/1 oven and blast chiller freezer, 80mm pitch (8 runners)	PNC 922608	
•	Slide-in rack with handle for 6 & 10 GN 1/1 oven	PNC 922610	
•	Open base with tray support for 6 & 10 GN 1/1 oven	PNC 922612	
•	Cupboard base with tray support for 6 & 10 GN 1/1 oven	PNC 922614	
•	Hot cupboard base with tray support for 6 & 10 GN 1/1 oven	PNC 922615	
	holding GN 1/1 or 400x600mm trays	PNC 922618	
:	External connection kit for liquid detergent and rinse aid Grease collection kit for GN 1/1-2/1 cupboard base (trolley with 2	PINC 922616 PNC 922619	
•	tanks, open/close device for drain)	114C 722017	_
•	Stacking kit for 6+6 GN 1/1 ovens on electric 6+10 GN 1/1 GN ovens	PNC 922620	
•	Trolley for slide-in rack for 6 & 10 GN 1/1 oven and blast chiller	PNC 922626	
	freezer	DNC 000470	
•	Trolley for mobile rack for 6 GN 1/1 on 6 or 10 GN 1/1 ovens	PNC 922630 PNC 922636	
	Stainless steel drain kit for 6 & 10 GN oven, dia=50mm Plastic drain kit for 6 &10 GN oven, dia=50mm	PNC 922637	
•	Trolley with 2 tanks for grease collection	PNC 922638	
•	Grease collection kit for GN 1/1-2/1 open base (2 tanks, open/	PNC 922639	
	close device for drain)		
•	Wall support for 10 GN 1/1 oven	PNC 922645	
•	Banquet rack with wheels holding 30 plates for 10 GN 1/1 oven and blast chiller freezer, 65mm pitch	PNC 922648	
	Banquet rack with wheels 23 plates for 10 GN 1/1 oven and blast	PNC 922649	
	chiller freezer, 85mm pitch		-
•	Dehydration tray, GN 1/1, H=20mm	PNC 922651	
•	Flat dehydration tray, GN 1/1	PNC 922652	
•	Open base for 6 & 10 GN 1/1 oven, disassembled - NO accessory can be fitted with the exception of 922382	PNC 922653	
	Bakery/pastry rack kit for 10 GN 1/1 oven with 8 racks 400x600mm	PNC 922656	
•	and 80mm pitch	1110 722000	-
•	Stacking kit for 6 GN 1/1 combi or convection oven on 15&25kg	PNC 922657	
	blast chiller/freezer crosswise	DNC 000//	_
•	Heat shield for stacked ovens 6 GN 1/1 on 10 GN 1/1 Heat shield for 10 GN 1/1 oven	PNC 922661 PNC 922663	
	Fixed tray rack for 10 GN 1/1 and 400x600mm grids	PNC 922685	
	Kit to fix oven to the wall	PNC 922687	
•	Tray support for 6 & 10 GN 1/1 oven base	PNC 922690	
•	4 adjustable feet with black cover for 6 & 10 GN ovens, 100-115mm		ū
•	Reinforced tray rack with wheels, lowest support dedicated to a	PNC 922694	
	grease collection tray for 10 GN 1/1 oven, 64mm pitch		_
•	Detergent tank holder for open base	PNC 922699	
•	Bakery/pastry runners 400x600mm for 6 & 10 GN 1/1 oven base	PNC 922702	
:	Wheels for stacked ovens Spit for lamb or suckling pig (up to 12kg) for GN 1/1 ovens	PNC 922704 PNC 922709	
	Mesh grilling grid, GN 1/1	PINC 922709 PNC 922713	
			2

SkyLine PremiumS Electric Combi Oven 10GN1/1, Green Version with IOT Module

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.




SkyLine PremiumS Electric Combi Oven 10GN1/1, Green Version with IOT Module

•	Probe holder for liquids	PNC 922714	
•	Odour reduction hood with fan for 6 & 10 GN 1/1 electric ovens	PNC 922718	
•	Odour reduction hood with fan for 6+6 or 6+10 GN 1/1 electric ovens	PNC 922722	
•	Condensation hood with fan for 6 & 10 GN 1/1 electric oven	PNC 922723	
•	Condensation hood with fan for stacking 6+6 or 6+10 GN 1/1 electric ovens	PNC 922727	
•	Exhaust hood with fan for 6 & 10 GN 1/1 ovens	PNC 922728	
•	Exhaust hood with fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922732	
٠	Exhaust hood without fan for 6&10 1/1GN ovens	PNC 922733	
•	Exhaust hood without fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922737	
•	Fixed tray rack, 8 GN 1/1, 85mm pitch	PNC 922741	
•	Fixed tray rack, 8 GN 2/1, 85mm pitch	PNC 922742	
•	4 high adjustable feet for 6 & 10 GN ovens, 230-290mm	PNC 922745	
•	Tray for traditional static cooking, H=100mm	PNC 922746	
•	Double-face griddle, one side ribbed and one side smooth, 400x600mm	PNC 922747	
•	Trolley for grease collection kit	PNC 922752	
•	Water inlet pressure reducer	PNC 922773	
•	Kit for installation of electric power peak management system for 6 & 10 GN Oven	PNC 922774	
•	Extension for condensation tube, 37cm	PNC 922776	
٠	Non-stick universal pan, GN 1/1, H=20mm	PNC 925000	
٠	Non-stick universal pan, GN 1/ 1, H=40mm	PNC 925001	
٠	Non-stick universal pan, GN 1/1, H=60mm	PNC 925002	
•	Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003	
٠	Aluminum grill, GN 1/1	PNC 925004	
•	Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1	PNC 925005	
٠	Flat baking tray with 2 edges, GN 1/1	PNC 925006	
•	Baking tray for 4 baguettes, GN 1/1	PNC 925007	
•	Potato baker for 28 potatoes, GN 1/1	PNC 925008	
•	Non-stick universal pan, GN 1/2, H=20mm	PNC 925009	
٠	Non-stick universal pan, GN 1/2, H=40mm	PNC 925010	
•	Non-stick universal pan, GN 1/2, H=60mm	PNC 925011	
•	Compatibility kit for installation on previous base GN 1/1	PNC 930217	




UK CA



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

SkyLine PremiumS Electric Combi Oven 10GN1/1, Green Version with 10T Module

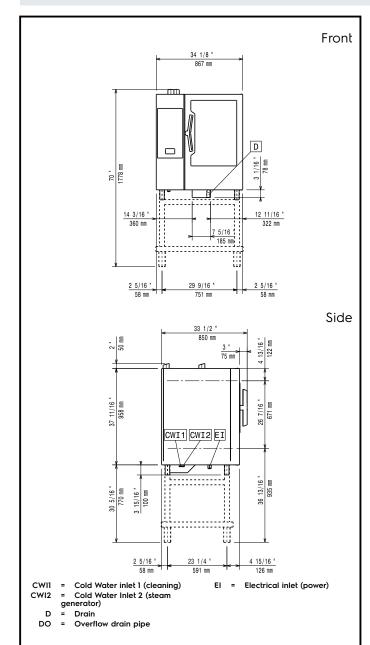

Тор 20 15/16 " 532 mm 4 15/16 " 51 15/16 1 1319 mm 125 mm 7 3/8 " 188 mm 8 7/16 " 214 mm 18 3/4 " 477 mm 2 3/16 15/16 ⁻ 50 mm 13/16 " 123 mm D 55 mn CWI1 Ô Ð 4 CWI2 Θ ΕI 1 15/16 " 1 15/16 " 50 mm 2 9/16 " 65 mm Intertek UK ERGOCEAT energy

Electric

Shipping volume:

Default power corresponds to factory test conditions. When supply voltage is declared as a range the test is performed at the average value. According to the country, the installed power may vary within the range. Circuit breaker required			
Supply voltage:	380-415 V/3N ph/50-60 Hz		
Electrical power, max:	20.3 kW		
Electrical power, default:	19 kW		
Water:			
Inlet water temperature, max:	30 °C		
Inlet water pipe size (CWI1, CWI2):	3/4"		
Pressure, min-max:	1-6 bar		
Chlorides:	<45 ppm		
Conductivity:	>50 µS/cm		
Drain "D":	50mm		
Electrolux Professional recommends the use of treated water, based on testing of specific water conditions. Please refer to user manual for detailed water quality			
information.			
Installation:			
	Clearance: 5 cm rear and		

Clearance: Suggested clearance for service access:	Clearance: 5 cm rear and right hand sides. 50 cm left hand side.		
Capacity:			
Trays type: Max load capacity:	10 (GN 1/1) 50 kg		
Key Information:			
Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Weight: Net weight: Shipping weight:	Right Side 867 mm 775 mm 1058 mm 147 kg 147 kg 165 kg		





The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.