Electrolux PROFESSIONAL

Modular Preparation 2400 mm Cupboard Base for Sink Top

		 Main Features Masonry installation removing feet. Extremely easy to c edges.
longitudinal stainless steel of sliding doors with sound de stainless steel bearings on t 150mm height-adjustable (Cupboard Base for Sinks Top, 2400mm ecification 04 AISI stainless steel. Front and re- c-channel reinforcement. Easily removab adening internal and external panels hav he top and a hidden runner on the bottoo 0/+90mm) oversized feet (65x65mm) oo stallation. 45° degree internal side corre	 Construction Mounted on 150 mm mm) oversized (65x Front and rear lengthead to the system. Internal sides support 45° degrees internsystem. 30 mm high middlesteel, height-adjust inner double fold to sides and back. Sliding doors, with stand external panels the s/s bearings and hidden runner. Door facilitating cleaning Constructed entirely with Scotch Brite fin Optional Access Stainless steel plinthelements, central ins 700mm depth Stainless steel plinthelements steelements steelemen
APPROVAL:		


TEM #	_
10DEL #	_
IAME #	
ils #	
AIA #	_

- on possible by simply
- lean thanks to the smooth
- n height adjustable (0/+90 65 mm) feet.
- gthwise stainless steel cent, 15/10 (16 gauges).
- orting the structure to have al side corners junction
- -shelf in AISI 304 stainless able in 3 positions, with o eliminate gaps between
- sound deadening internal , run on the upper part on nd on the lower part on a rs are easy to remove thus procedures.
- in AISI 304 Stainless Steel ish.

sories

- n for end PNC 855837 🗅 epth
- n for end PNC 855838 🗅 stallation,
- n, 2400mm PNC 855839 🖵



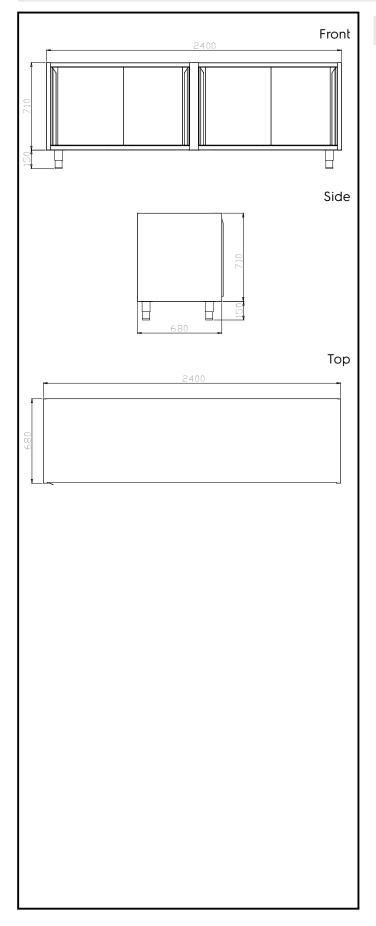

Modular Preparation 2400 mm Cupboard Base for Sink Top

Key Information:

Cabinet width:	
121829 (TEL2S24)	2400 mm
Cabinet depth:	680 mm
Cabinet height:	710 mm
N° of doors:	4
Door Type:	Sliding
External dimensions, Width:	2400 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	860 mm
Net weight:	60 kg

Modular Preparation 2400 mm Cupboard Base for Sink Top

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.