

## PLUS - Static Preparation 2400 mm Sink Unit with 2 Bowls + Drainers + Shelf

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



134120 (LSGLG2426E)

Sink Unit with 2 bowls, 2 drainers and lower shelf, 2400mm

# **Short Form Specification**

#### Item No.

Enhanced stability and solid construction thanks to the welded frame and legs. The 50mm high worktop in 304 AISI stainless steel, with Scotch Brite finishing 10/10 mm in thickness, has antidrip edges, welded corners and overflow rim along the top. 2 welded and polish sink bowls in 304 AISI stainless steel supplied with overflow pipe and 2" drain hole. Upstand h=100mm with 10mm radius corner covered on the back with AISI 304 stainless steel spot welded profile. Square section legs and height adjustable feet (-20 +30 mm) in 304 AISI stainless steel. 40 mmthick lower welded shelf in AISI 304 stainless steel slots easily into place at a height of 200 mm from the floor (compulsory toinstall the chest of drawers). Square section legs and height adjustable feet (-20 +30 mm) in 304 AISI stainless steel.

### **Main Features**

- Enhanced stability and solid construction. Stability, loading and stress tests by external certified body.
- Product range suitable for international tenders requirements for intense usage installations.

#### Construction

- Welded frame and legs.
- Worktop with 50mm high profile, is in stainless steel Scotch Brite finishing, 10/10 in thickness with anti-drip edges and welded corners and overflow rim along the top.
- Constructed entirely in 304 AISI stainless steel.
- Sink bowl is sound-deadened, in polish stainless steel overflow pipe and 2" drain hole.
- Drainers are sound-deadened with stainless steel reinforcement bars.
- Upstand back completely covered with Stainless Steel welded profile.
- Lower shelf has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement welded to legs for further structure reinforcement.
- Square section legs (40x40mm, 10/10 in thickness) and height-adjustable feet (-20/+30mm).
- Accessories:-set of castors as alternative to the feet, can be fitted as optional.

#### Optional Accessories


- Double plastic drain syphon 2 PNC 850022 □
   " for sinks
- Set of 4 wheels (2 with brake), PNC 855205 diameter=100mm
- Single plastic drain syphon 2 PNC 895313 □
   " for Sinks

#### APPROVAL:





# PLUS - Static Preparation 2400 mm Sink Unit with 2 Bowls + Drainers + Shelf

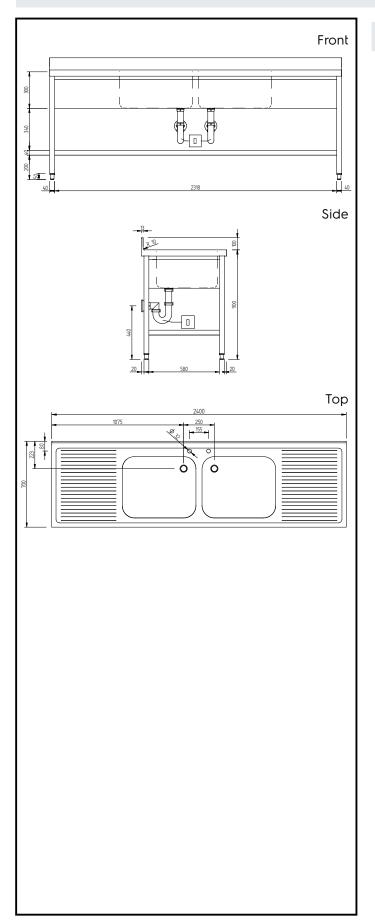

### **Key Information:**

External dimensions, Width:

134120 (LSGLG2426E) 2400 mm

External dimensions, Depth: 700 mm

External dimensions, Height: 1000 mm

Upstand Dimensions, Depth: 13 mm

Upstand Dimensions, Radius: R=10

Bowls number 2

Bowl dimensions 600x500xH300

Worktop thickness: 50 mm Net weight: 75 kg