

Standard Preparation 2400 mm Sink with 2 Bowls & 2 Drains

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



133248 (LG2426N)

Sink Unit with 2 bowls 600x500mm and 2 drainers, 2400mm

Short Form Specification

Item No.

Made from 304 AISI stainless steel. The 50mm high worktop in 304 AISI stainless steel, Imm in thickness, is sound-deadened and has an overflow rim and welded corners. Integral rear upstand, h=100mm, with 8mm radius. All-round apron. Square section legs 40x40mm on 1" height-adjustable feet (+/-20mm)

N. 2 bowls mm600x500x300h with overflow pipe and 2"drain hole; N. 2 drainers.

Construction

- 50 mm worktop in 304 AISI stainless steel, 10/10 in thickness with overflow rim along the top.
- Sink bowl in 304 AISI stainless steel, supplied with overflow drain pipe and drain hole.
- 100 mm upstand with 8 mm radioused corner and 13 mm deep, designed to be used against a wall.
- Square section legs and 40 mm height-adjustable feet in 304 AISI stainless steel.
- Sink tops easily slotted onto the legs and taps are easily installed from the rear.
- Accessories available on request: lower shelf, tap unit, false bowl bottom, overflow filter, single or double syphons.

Optional Accessories


- False bottom for right hand PNC 895100 □ 600x500mm Bowl
- Overflow filter for bowl (H=180 PNC 895130 Dmm)
- Overflow filter for bowl (H=230 PNC 895131 ☐ mm)
- Overflow filter for bowl (H=330 PNC 895132 ☐ mm)
- False bottom for right and left PNC 895200 ☐ hand 500x500 mm bowl

APPROVAL:





Standard Preparation 2400 mm Sink with 2 Bowls & 2 Drains

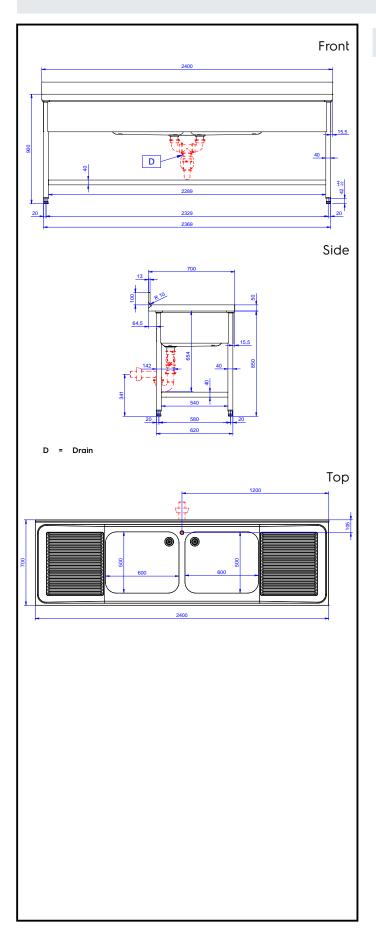

Key Information:

External dimensions, Width:

133248 (LG2426N) 2400 mm

External dimensions, Depth: 700 mm

External dimensions, Height: 1000 mm

Upstand Dimensions, Height: 13 mm

Upstand Dimensions, Radius: R=8

Bowls number 2

Bowl dimensions 600x500xH300

Worktop thickness: 50 mm Net weight: 70 kg