

## MultiSlim Electric Compact Digital Oven 6GN 1/1

ITEM # \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 NAME # \_\_\_\_\_  
 SIS # \_\_\_\_\_  
 AIA # \_\_\_\_\_



**260635 (ECD061L)**

Compact electric Oven,  
6x1/1GN, with direct steam  
and 11 humidity level  
settings, without automatic  
cleaning, left-hinged door

**260655 (ECD061R)**

Compact electric Oven,  
6x1/1GN, with direct steam  
and 11 humidity level  
settings, without automatic  
cleaning, right-hinged door

### Short Form Specification

#### Item No. \_\_\_\_\_

Convection oven with direct steam: 90% steam saturation.  
 Cooking cycles: hot air (max 280 °C) combined with 11 different  
 humidity settings, ranging from browning to baking and par-steaming.  
 Programmability: 99 free recipes with 9-step cooking. Variable fan  
 speed with 3 levels. Double-glass door with book-like opening  
 maintains a cool external temperature and incorporates a drip pan  
 to collect excess condensation avoiding wet floors. Halogen lighting  
 in the cooking chamber. Door, front panel and interior in AISI 304  
 stainless steel.  
 Supplied with n.1 tray rack 1/1GN, 30mm pitch.

### Main Features

- Dry hot convection cycle (max 280 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation:
  - 0 = no additional moisture (browning, au gratin, baking, pre-cooked food)
  - 1-2 = low moisture (small portions of meat and fish)
  - 3-4 = medium low moisture (large pieces of meat, reheating, roasted chicken and proving)
  - 5-6 = medium moisture (roasted vegetable and first step of roasted meat & fish)
  - 7-8 = medium-high moisture (stewed vegetables)
  - 9-10 = high moisture (poached meat and jacket potatoes)
- Programmability: a maximum of 99 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 9-step cooking programs also available.
- Exhaust valve electronically controlled to extract humidity in excess for extra crispy results.
- Eco-delta: the temperature inside the cooking cell is higher than the temperature of the food and rises accordingly.
- Variable fan speed with 3 levels.
- Automatic and manual rapid cooling activation when going from a higher to a lower temperature.
- USB connection: to download HACCP data, upload/download the recipes.

### Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Hygienic internal chamber with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- IPx4 water protection.

APPROVAL: \_\_\_\_\_

### Included Accessories

- 1 of Water inlet pressure reducer (only for 260655) PNC 922773

### Optional Accessories


- Pair of AISI 304 stainless steel grids, GN 1/1 PNC 922017 ☐
- Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2 PNC 922086 ☐
- Pair of frying baskets PNC 922239 ☐
- Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922266 ☐
- Base support for stacked compact ovens PNC 922368 ☐
- Open base for compact 6x1/1GN oven PNC 922369 ☐
- Tray support for compact 6x1/1GN oven - open base PNC 922370 ☐
- Stacking kit for compact 6x1/1GN oven PNC 922371 ☐
- External spray unit for compact 6x1/1GN oven PNC 922372 ☐
- 1-sensor core probe for compact 6x1/1GN oven PNC 922373 ☐
- Right-hinged door for compact 6x1/1GN oven (only for 260635) PNC 922374 ☐
- Double-step door for opening compact 6x1/1GN oven PNC 922377 ☐
- Kit to front air filter for compact 6x1/1GN oven PNC 922379 ☐
- Water inlet pressure reducer (only for 260635) PNC 922773 ☐
- Non-stick universal pan, GN 1/1, H=20mm PNC 925000 ☐
- Non-stick universal pan, GN 1/1, H=40mm PNC 925001 ☐
- Non-stick universal pan, GN 1/1, H=60mm PNC 925002 ☐
- Double-face griddle, one side ribbed and one side smooth, GN 1/1 PNC 925003 ☐
- Aluminum grill, GN 1/1 PNC 925004 ☐
- Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 PNC 925005 ☐
- Flat baking tray with 2 edges, GN 1/1 PNC 925006 ☐
- Baking tray for 4 baguettes, GN 1/1 PNC 925007 ☐
- Non-stick universal pan, GN 1/2, H=20mm PNC 925009 ☐
- Non-stick universal pan, GN 1/2, H=40mm PNC 925010 ☐
- Non-stick universal pan, GN 1/2, H=60mm PNC 925011 ☐




**Electrolux**  
PROFESSIONAL

# MultiSlim Electric Compact Digital Oven 6GN 1/1

Front




Side



- CWI1 = Cold Water inlet 1 (cleaning)  
CWI2 = Cold Water Inlet 2 (steam generator)  
D = Drain  
EI = Electrical inlet (power)

Top

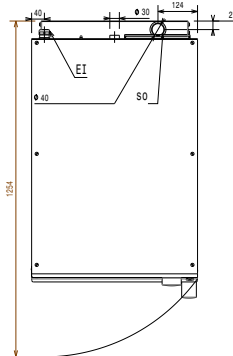

## Electric

Supply voltage: 400 V/3N ph/50/60 Hz  
Electrical power, max: 6.9 kW  
Circuit breaker required

## Water:

Total hardness: 5-50 ppm  
Electrolux Professional recommends the use of treated water, based on testing of specific water conditions. Please refer to user manual for detailed water quality information.

Pressure, min-max: 1.5-3 bar  
Drain "D": 40mm  
Water inlet "CW" connection: 3/4"

## Installation:

Clearance: 5 cm rear and right hand sides.  
Suggested clearance for service access: 50 cm left hand side.

## Capacity:

Max load capacity: 12 kg  
Trays type: 6 (GN 1/1)

## Key Information:

External dimensions, Width: 519 mm  
External dimensions, Depth: 803 mm  
External dimensions, Height: 770 mm  
Net weight: 72 kg  
Shipping weight: 83 kg  
Shipping volume: 0.66 m<sup>3</sup>



MultiSlim  
Electric Compact Digital Oven 6GN 1/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.05.26