



## MultiSlim Electric Compact Digital Oven 6GN 1/1 with Cleaning System



260638 (ECD061WL)

Compact electric Oven, 6x1/1GN, with direct steam and 11 humidity level settings, with automatic cleaning, left-hinged door

260658 (ECD061WR)

Compact electric Oven, 6x1/1GN, with direct steam and 11 humidity level settings, with automatic cleaning, right-hinged door

### Short Form Specification

#### Item No.

Compact electric Oven with direct steam: 90% steam saturation. Cooking cycles: hot air (max 280 °C) combined with 11 different humidity settings, ranging from browning to baking and par-steaming. Programmability: 99 free recipes with 9-step cooking. Variable fan speed with 3 levels. Double-glass door with book-like opening maintains a cool external temperature and incorporates a drip pan to collect excess condensation avoiding wet floors. Halogen lighting in the cooking chamber. Door, front panel and interior in AISI 304 stainless steel.

Supplied with n.1 tray rack 1/1GN, 30mm pitch.

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

### Main Features

- Dry hot convection cycle (max 280 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation:
  - 0 = no additional moisture (browning, au gratin, baking, pre-cooked food)
  - 1-2 = low moisture (small portions of meat and fish)
  - 3-4 = medium low moisture (large pieces of meat, reheating, roasted chicken and proving)
  - 5-6 = medium moisture (roasted vegetable and first step of roasted meat & fish)
  - 7-8 = medium-high moisture (stewed vegetables)
  - 9-10 = high moisture (poached meat and jacket potatoes)
- Programmability: a maximum of 99 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 9-step cooking programs also available.
- Exhaust valve electronically controlled to extract humidity in excess for extra crispy results.
- Eco-delta: the temperature inside the cooking cell is higher than the temperature of the food and rises accordingly.
- Automatic cleaning system: 3 different pre-set cycles to clean the cooking cell, according to the actual requirements. The cleaning system is built-in (no need for add-ons).
- Automatic and manual rapid cooling activation when going from a higher to a lower temperature.
- USB connection: to download HACCP data, upload/download the recipes.
- Variable fan speed with 3 levels.

### Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Hygienic internal chamber with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- IPx4 water protection.
- Water consumption during steaming cycle is 2.6 litres per hour.

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)



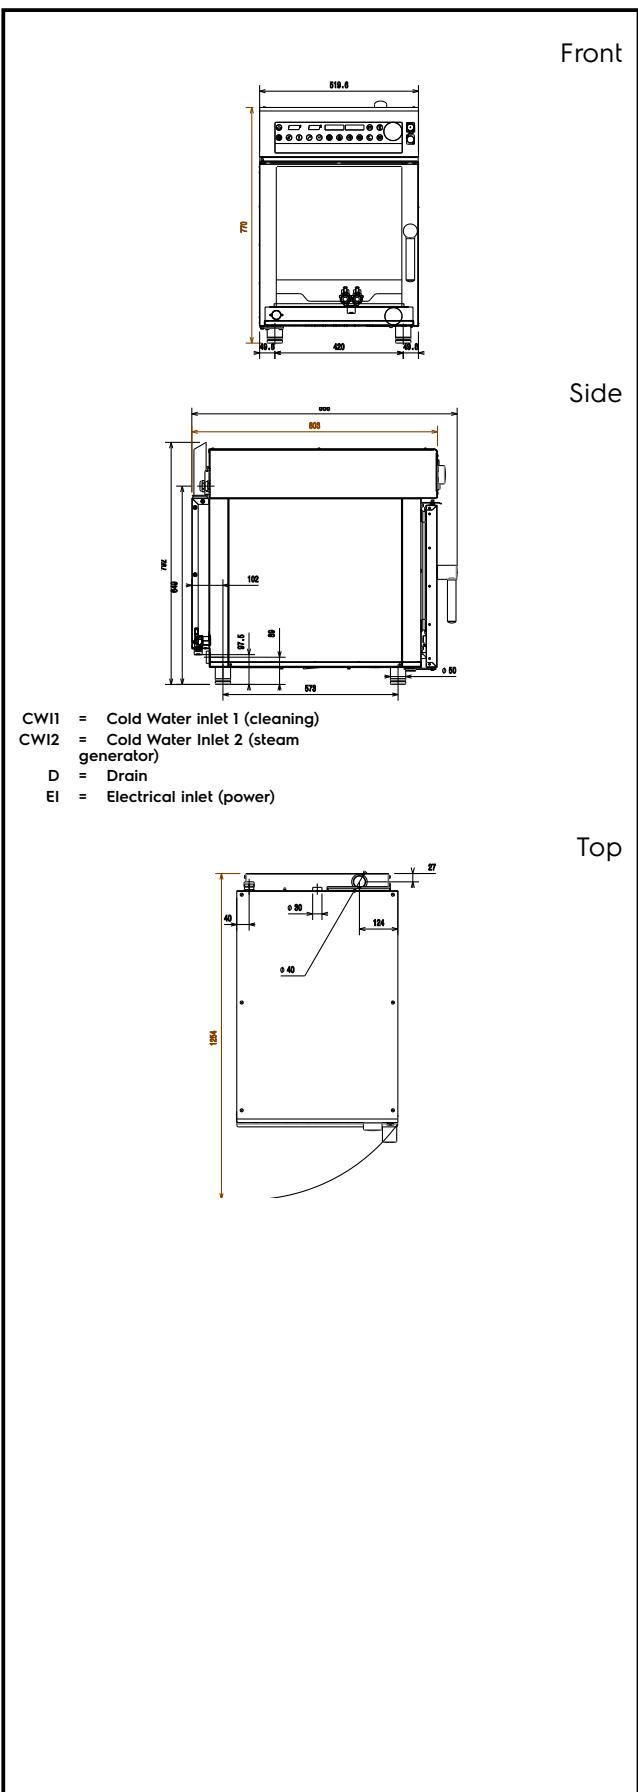
**MultiSlim  
Electric Compact Digital Oven 6GN  
1/1 with Cleaning System**



**MultiSlim  
Electric Compact Digital Oven 6GN 1/1 with Cleaning System**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.02.18


**Electric**

**Supply voltage:** 400 V/3N ph/50/60 Hz

230V 3ph 50/60Hz;

230V 50/60Hz

6.9 kW

**Predisposed for:**

**Electrical power, max:**

**Circuit breaker required**

**Water:**

**Total hardness:** 5-50 ppm

**Electrolux Professional** recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

**Pressure, min-max:** 1.5-3 bar

**Drain "D":** 40mm

**Water inlet "CW" connection:** 3/4"

**Installation:**

**Clearance:** 5 cm rear and right hand sides.

**Suggested clearance for service access:** 50 cm left hand side.

**Capacity:**

**Max load capacity:** 12 kg

**Trays type:** 6 (GN 1/1)

**Key Information:**

**External dimensions, Width:** 519 mm

**External dimensions, Depth:** 803 mm

**External dimensions, Height:** 770 mm

**Net weight:** 72 kg

**Shipping weight:**

260638 (ECD061WL) 84 kg

260658 (ECD061WR) 83 kg

**Shipping volume:**

260638 (ECD061WL) 0.66 m<sup>3</sup>

260658 (ECD061WR) 0.65 m<sup>3</sup>